


Service Manual

65 inch Class 1080p Plasma HDTV

Model No. TH-65PZ850U

GPF11DU Chassis

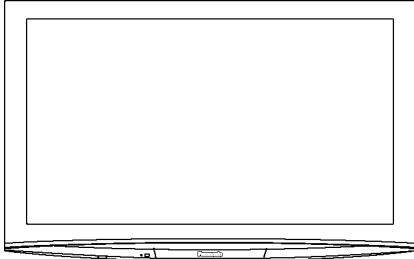

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are important for safety. These parts are marked by ⚠ in the Schematic Diagrams, Circuit Board Diagrams, Exploded Views and Replacement Parts List. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire or other hazards. Do not modify the original design without permission of manufacturer.

1 Safety Precautions

1.1. General Guidelines

1. When conducting repairs and servicing, do not attempt to modify the equipment, its parts or its materials.
2. When wiring units (with cables, flexible cables or lead wires) are supplied as repair parts and only one wire or some of the wires have been broken or disconnected, do not attempt to repair or re-wire the units. Replace the entire wiring unit instead.
3. When conducting repairs and servicing, do not twist the Faston connectors but plug them straight in or unplug them straight out.
4. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
5. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
6. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

1.1.1. Leakage Current Cold Check

1. Unplug the AC cord and connect a jumper between the two prongs on the plug.
2. Measure the resistance value, with an ohmmeter, between the jumpered AC plug and each exposed metallic cabinet part on the equipment such as screwheads, connectors, control shafts, etc. When the exposed metallic part has a return path to the chassis, the reading should be between 1Mohm and 5.2Mohm. When the exposed metal does not have a return path to the chassis, the reading must be ∞ .

1.1.2. Leakage Current Hot Check (See Figure 1.)

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a 1.5kohm, 10 watts resistor, in parallel with a 0.15 μ F capacitors, between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
3. Use an AC voltmeter, with 1000 ohms/volt or more sensitivity, to measure the potential across the resistor.
4. Check each exposed metallic part, and measure the voltage at each point.
5. Reverse the AC plug in the AC outlet and repeat each of the above measurements.
6. The potential at any point should not exceed 0.75 volts RMS. A leakage current tester (Simpson Model 229 or equivalent) may be used to make the hot checks, leakage current must not exceed 1/2 milliamp. In case a measurement is outside of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

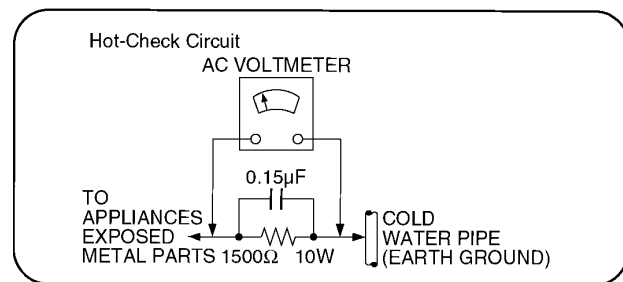


Figure 1

2 Warning

2.1. Prevention of Electrostatic Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor [chip] components. The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as [anti-static (ESD protected)] can generate electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise ham less motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

2.2. About lead free solder (PbF)

Note: Lead is listed as (Pb) in the periodic table of elements.

In the information below, Pb will refer to Lead solder, and PbF will refer to Lead Free Solder.

The Lead Free Solder used in our manufacturing process and discussed below is (Sn+Ag+Cu).


That is Tin (Sn), Silver (Ag) and Copper (Cu) although other types are available.

This model uses Pb Free solder in it's manufacture due to environmental conservation issues. For service and repair work, we'd suggest the use of Pb free solder as well, although Pb solder may be used.

PCBs manufactured using lead free solder will have the PbF within a leaf Symbol **PbF** stamped on the back of PCB.




Caution

- Pb free solder has a higher melting point than standard solder. Typically the melting point is 50 ~ 70 °F (30~40 °C) higher. Please use a high temperature soldering iron and set it to 700 ± 20 °F (370 ± 10 °C).
- Pb free solder will tend to splash when heated too high (about 1100 °F or 600 °C).
If you must use Pb solder, please completely remove all of the Pb free solder on the pins or solder area before applying Pb solder. If this is not practical, be sure to heat the Pb free solder until it melts, before applying Pb solder.
- After applying PbF solder to double layered boards, please check the component side for excess solder which may flow onto the opposite side. (see figure below)

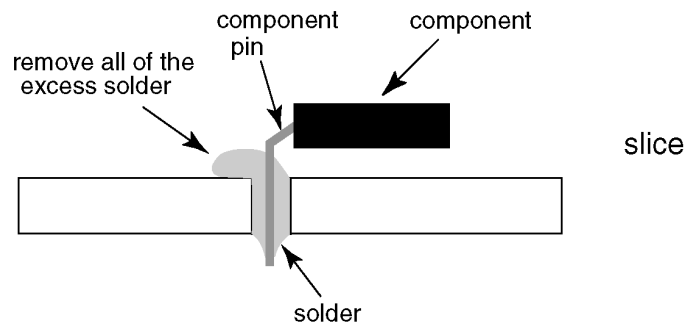

Suggested Pb free solder



There are several kinds of Pb free solder available for purchase. This product uses Sn+Ag+Cu (tin, silver, copper) solder. However, Sn+Cu (tin, copper), Sn+Zn+Bi (tin, zinc, bismuth) solder can also be used.

0.3mm X 100g	0.6mm X 100g	1.0mm X 100g
		

3 Service Navigation

3.1. Service Hint

Remove the Rear cover

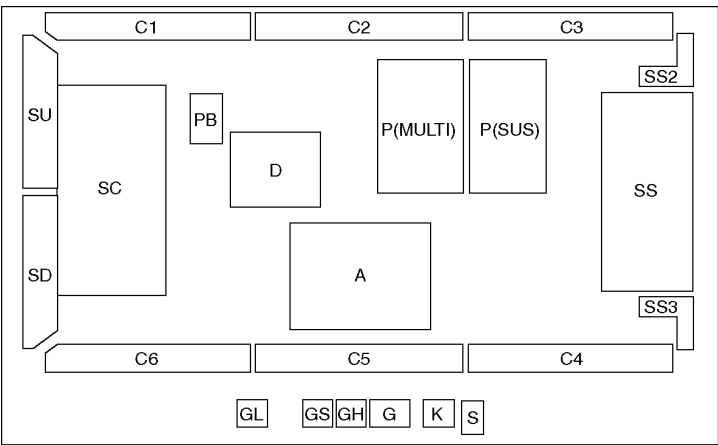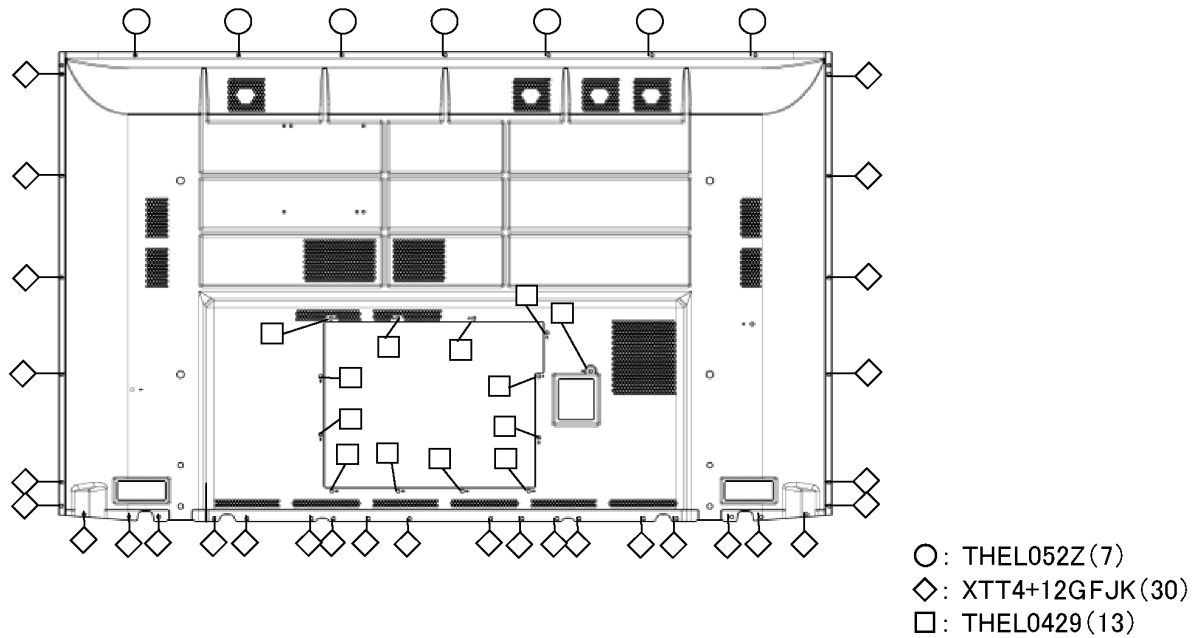

Board Name	Function	Board Name	Function
P	Power Supply	C1	Data Driver (Upper Right)
A	DC-DC Converter	C2	Data Driver (Upper Center)
	Speaker out, Sound Processor	C3	Data Driver (Upper Left)
	AV Terminal, AV Switch, Ethernet LAN	C4	Data Driver (Lower Left)
	Digital Signal Processor, Micom, HDMI Interface	C5	Data Driver (Lower Center)
	Peaks PRO, GC6	C6	Data Driver (Lower Right)
D	Format Converter, Plasma AI, Sub-Field Processor	SC	Scan Drive
K	Remote receiver, Power LED	SU	Scan out (Upper)
S	Power Switch	SD	Scan out (Lower)
GS	SD Card Slot	SS	Sustain Drive
GL	SD Blue LED	SS2	Sustain connector (Upper)
GH	HDMI4 in	SS3	Sustain connector (Lower)
G	Front Terminal, Key Switch	PB	Fan control

3.2. Applicable signals

* Mark: Applicable input signal for Component (Y, PB, PR), HDMI and PC

	horizontal frequency (kHz)	vertical frequency (Hz)	COMPONENT	HDMI	PC
525 (480) / 60i	15.73	59.94	*	*	
525 (480) /60p	31.47	59.94	*	*	
750 (720) /60p	45.00	59.94	*	*	
1,125 (1,080) /60i	33.75	59.94	*	*	
1,125 (1,080) /60p	67.43	59.94		*	
1,125 (1,080) /60p	67.50	60.00		*	
1,125 (1,080) /24p	26.97	23.98		*	
1,125 (1,080) /24p	27.00	24.00		*	
640 × 400 @70	31.47	70.08			*
640 × 480 @60	31.47	59.94			*
Macintosh13 inch (640 × 480)	35.00	66.67			*
640 × 480 @75	37.50	75.00			*
852 × 480 @60	31.47	59.94			*
800 × 600 @60	37.88	60.32			*
800 × 600 @75	46.88	75.00			*
800 × 600 @85	53.67	85.08			*
Macintosh16 inch (832 × 624)	49.73	74.55			*
1,024 × 768 @60	48.36	60.00			*
1,024 × 768 @70	56.48	70.07			*
1,024 × 768 @75	60.02	75.03			*
1,024 × 768 @85	68.68	85.00			*
Macintosh 21 inch (1,152 × 870)	68.68	75.06			*
1,280 × 1,024 @60	63.98	60.02			*
1,366 × 768 @60	48.36	60.00			*

Note

- Signals other than above may not be displayed properly.
- The above signals are reformatted for optimal viewing on your display.

4 Specifications

Power Source	AC 120 V, 60 Hz	
Power Consumption		
Maximum	792 W	
Standby condition	0.2 W	
Plasma Display panel		
Drive method	AC type	
Aspect Ratio	16:9	
Visible screen size	65 inch class (64.7 inches measured diagonally)	
(W × H × Diagonal)	56.4 inch × 31.7 inch × 64.7 inch (1,434 mm × 807 mm × 1,646 mm)	
(No. of pixels)	2,073,600 (1,920 (W) × 1,080 (H))[5,760 × 1,080 dots]	
Sound		
Audio Output	Super Slim SP (2.5W) × 2, Woofer (13W) × 2	
PC signals	VGA, SVGA, XGA, WXGA, SXGA	
	Horizontal scanning frequency 31 - 69 kHz	
	Vertical scanning frequency 59 - 86 Hz	
Channel Capability (Digital/Analog)	VHF/ UHF: 2 - 69, CATV: 1 - 135	
Operating Conditions		
	Temperature:	32 °F - 104 °F (0 °C - 40 °C)
	Humidity:	20 % - 80 % RH (non-condensing)
Connection Terminals		
VIDEO IN 1-2	VIDEO:	RCA PIN Type × 1 1.0 V [p-p] (75 Ω)
	S-VIDEO:	Mini DIN 4-pin Y: 1.0 V [p-p] (75 Ω) C: 0.286 V [p-p] (75 Ω)
	AUDIO L-R:	RCA PIN Type × 2 0.5 V [rms]
COMPONENT INPUT 1-2	Y:	1.0 V [p-p] (including synchronization)
	P _B , P _R :	±0.35 V [p-p]
	AUDIO L-R:	RCA PIN Type × 2 0.5 V [rms]
HDMI 1-4	TYPE A Connector × 4	
	This TV supports [HDAVI Control 3] function.	
PC	D-SUB 15PIN:	R,G,B / 0.7 V [p-p] (75 Ω)
		HD, VD / 1.0 - 5.0 V [p-p] (high impedance)
	AUDIO L-R:	Stereo Mini Jack (ϕ 3.5 mm) × 1
RS232C (Serial)	D-sub 9pin for external control	
LAN (for VIERA CAST IPTV)	RJ45 (10BASE-T/100BASE-TX)	
Card slot	SD CARD slot × 1	
AV PROG OUT	VIDEO:	RCA PIN Type × 1 1.0 V [p-p] (75 Ω)
	AUDIO L-R:	RCA PIN Type × 2 0.5 V [rms]
DIGITAL AUDIO OUT	PCM / Dolby Digital, Fiber Optic	
FEATURES	3D Y/C FILTER	CLOSED CAPTION
	V-Chip	BBE VIVA 3D
	Photo viewer	HDAVI Control 3
	IPTV(VIERA CAST)	
	Movie player	
Dimensions (W × H × D)		
TV Set only	63.0 inch × 39.1 inch × 4.3 inch (1,599 mm × 993 mm × 109 mm)	
Mass		
TV Set only	160.3 lb. (72.7 kg)	


Note

- Design and Specifications are subject to change without notice. Mass and Dimensions shown are approximate.

5 Service Mode

5.1. How to enter into Service Mode

While pressing [VOLUME (-)] button of the main unit, press [INFO] button of the remote control three times within 2 seconds.

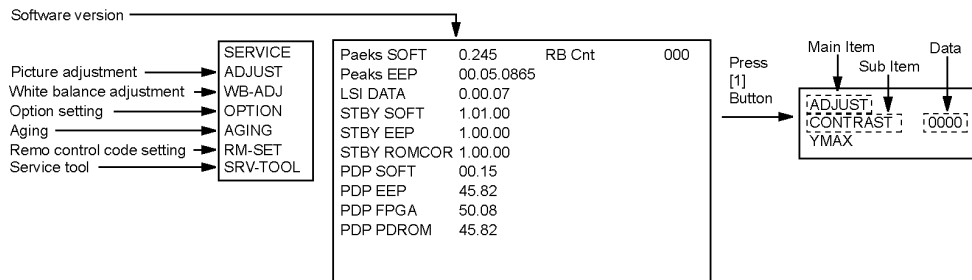

5.1.1. Key command

[1] button...Main items Selection in forward direction

[2] button...Main items Selection in reverse direction

[3] button...Sub items Selection in forward direction

[4] button...Sub items Selection in reverse direction

[VOL] button...Value of sub items change in forward direction (+), in reverse direction (-)

5.1.2. Contents of adjustment mode

- Value is shown as a hexadecimal number.
- Preset value differs depending on models.
- After entering the adjustment mode, take note of the value in each item before starting adjustment.

Main item	Sub item	Sample Data	Remark
ADJUST	CONTRAST	000	
	COLOR	3C	
	TINT	03	
	SUB-BRT	800	
WB-ADJ	R-CUT	80	
	G-CUT	80	
	B-CUT	80	
	R-DRV	FC	
	G-DRV	F8	
	B-DRV	D9	
	ALL-CUT	80	
	ALL-DRV	FC	
OPTION	BOOT	ROM	Factory Preset
	STBY-SET	00	
	EMERGENCY	ON	
	CLK MODE	00	
	CLOCK	000	
AGING	RGBW		
	COUNT		
	ALL WHITE		
	ALL RED		
	ALL GREEN		
	ALL BLUE		
	ON/OFF		
	RAMP WHITE		
	RAMP RED		
	RAMP GREEN		
	RAMP BLUE		
	1% WINDOW		
	COLOR BAR		
	A-ZONE B-ZONE/4 TRIO		
	SCROLL		
	WHITE FLAME		
RM-SET	CODE	A	Fixed
SRV-TOOL	-		See next

5.1.3. How to exit

Switch off the power with the [POWER] button on the main unit or the [POWER] button on the remote control.

5.2. Service tool mode

5.2.1. How to access

1. Select [SRV-TOOL] in Service Mode.
2. Press [OK] button on the remote control.

	SRV-TOOL	
Display of TD2Microcode version →	TD2Microcode:81c0000e	
Display of Flash ROM maker code →	Flash ROM : 1 - 227E	
Display of SOS History →	PTCT : 00 . 00 . 00 . 00 . 00	Time 00000:40 Count 0000022

POWER ON TIME/COUNT
Press [MUTE] button (3sec)

5.2.2. Display of SOS History

SOS History (Number of LED blinking) indication.

From left side; Last SOS, before Last, three occurrence before, 2nd occurrence after shipment, 1st occurrence after shipment.

This indication except 2nd and 1st occurrence after shipment will be cleared by [Self-check indication and forced to factory shipment setting].

5.2.3. POWER ON TIME/COUNT

Note : To display TIME/COUNT menu, highlight position, then press MUTE for (3sec).

Time : Cumulative power on time, indicated hour : minute by decimal

Count : Number of ON times by decimal

Note : This indication will not be cleared by either of the self-checks or any other command.

5.2.4. Exit

1. Disconnect the AC cord from wall outlet.

5.3. Hotel mode

1. Purpose
Restrict a function for hotels.
2. Access command to the Hotel mode setup menu
In order to display the Hotel mode setup menu, please enter the following command **(within 2 second)**.
[TV] : Vol. [Down] + [REMOTE] : TV/VIDEO (3 times)

Then, the Hotel mode setup menu is displayed.

Hotel Mode

Mode	Off
Input	-
Channel	-
Volume	+ 25
Vol. Max	+ 100
OSD Ctrl	Off
FP Ctrl	Off
Pow Ctrl	Off

Select  Change
 RETURN

3. To exit the Hotel mode setup menu
Disconnect AC power cord from wall outlet.
4. Explain the Hotel mode setup menu

item	Function
Mode	Select hotel mode ON/OFF
Input	Select input signal modes. Set the input, when each time power is switched on. Selection: -/RF/COMP1/COMP2/HDMI1/HDMI2/HDMI3/HDMI4/VIDEO1/VIDEO2/PC • Off: give priority to a last memory.
Channel	Select channel when input signal is RF. Set the channel, each time power is switched on. Selection: Any channel number or [-]. [-] means the channel when turns off.
Volume	Adjust the volume when each time power is switched on. Range: 0 to 100
Vol. Max	Adjust maximum volume. Range: 0 to 100
OSD Ctrl	Restrict the OSD. Selection: OFF/PATTERN1 • OFF: No restriction • PATTERN1: restriction
FP Ctrl	Select front key conditions. Selection: Off/Pattern1/All • Off: altogether valid. • Pattern: only input key is valid. • All: altogether invalid.
Pow Ctrl	Select POWER-ON/OFF condition when AC power cord is disconnected and then connected. OFF: The same condition when AC power cord is disconnected. ON: Forced power ON condition.

6 Troubleshooting Guide

Use the self-check function to test the unit.

1. Checking the IIC bus lines
2. Power LED Blinking timing

6.1. Check of the IIC bus lines

6.1.1. How to access

Self-check indication only:

Produce TV reception screen, and while pressing [VOLUME (-)] button on the main unit, press [OK] button on the remote control for more than 3 seconds.

Self-check indication and forced to factory shipment setting:

Produce TV reception screen, and while pressing [VOLUME (-)] button on the main unit, press [MENU] button on the remote control for more than 3 seconds.

6.1.2. Exit

Disconnect the AC cord from wall outlet.

6.1.3. Screen display

SELF CHECK		0.220- 00.03.0757	
PEAKS	OK	TEMP	OK
TUN1	OK	PANEL	OK
TUN2	OK	GC6	OK
FE	OK		
AVSW	OK		
ADV	OK		
ADAV	OK		
GenX	OK		
MEM1	OK		
MEM2	OK		
Copyright 2008 Matsushita Electric Industrial Co., Ltd.			

6.1.4. Check Point

Confirm the following parts if NG was displayed.

DISPLAY	Ref. No.	Description	P.C.B.
PEAKS	IC8001	Peaks PRO	A-Board
TUN1	TU8300	TUNER (PLL block)	A-Board
TUN2	TU8300	TUNER (MTS block)	A-Board
FE	IC8300	FRONT END PROCESSOR	A-Board
AVSW	IC3001	AUDIO/VIDEO SW	A-Board
ADV	IC4510	A/D CONV. , HDMI RX	A-Board
ADAV	IC2106	SOUND PROCESSOR	A-Board
GenX	IC1100	GenX5 (STB MPU)	A-Board
MEM1	IC1101	EEPROM (GenX5)	A-Board
MEM2	IC8506	EEPROM (Peaks)	A-Board
TEMP	IC9002	TEMP SENSOR	D-Board
PANEL	IC9003	PANEL MICOM	D-Board
GC6	IC5100	GC6	A-Board

6.2. Power LED Blinking timing chart

1. Subject

Information of LED Flashing timing chart.

2. Contents

When an abnormality has occurred the unit, the protection circuit operates and reset to the stand by mode. At this time, the defective block can be identified by the number of blinks of the Power LED on the front panel of the unit.


Blinking Times	Blinking timing	Contents	Check point
1		No particular check point	-
		Panel Status	-
		STB 5V SENSE Time out	A-Board
2		15V SOS	D-Board
3		3.3V SOS	A-Board
4		Power SOS	P-Board
5		5V SOS	D-Board
6		Driver SOS1 (SC Energy recovery circuit)	SU-Board SD-Board SC-Board
7		Driver SOS2 (SC floating voltage area)	SU-Board SD-Board SC-Board
8		Driver SOS3 (SS Energy recovery circuit)	SS-Board SS2-Board SS3-Board
9		Communication Error between Panel-MPU and STB-MPU	A-Board D-Board
10		Sub 5V SOS Main 3.3V SOS DTV 9V SOS Tuner Power SOS	A-Board
11		Fan SOS	PB-Board
12		Sound SOS	A-Board
13		Communication Error with IC8001 (Pesks PRO)	A-Board

6.3. No Power


First check point

There are following 2 states of No Power indication by power LED.


1. No lit
2. Red is lit then turns red blinking a few seconds later. (See 6.2.)

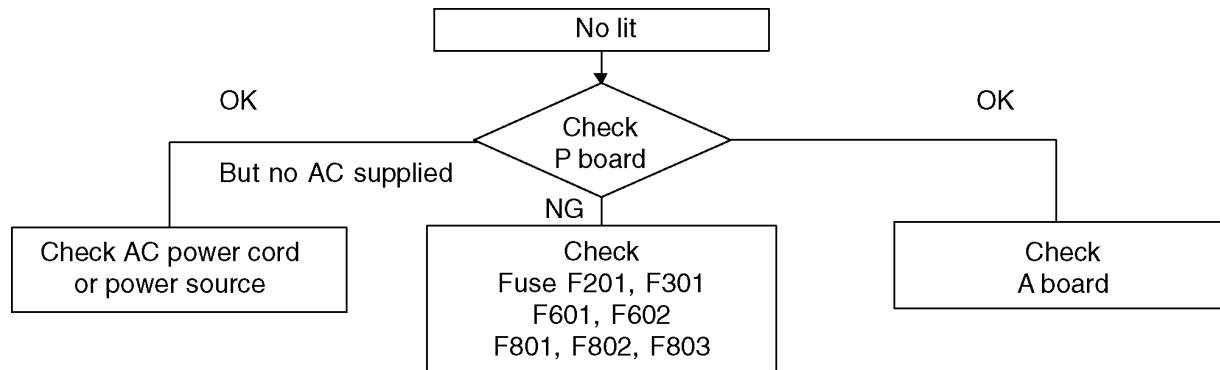

6.4. No Picture

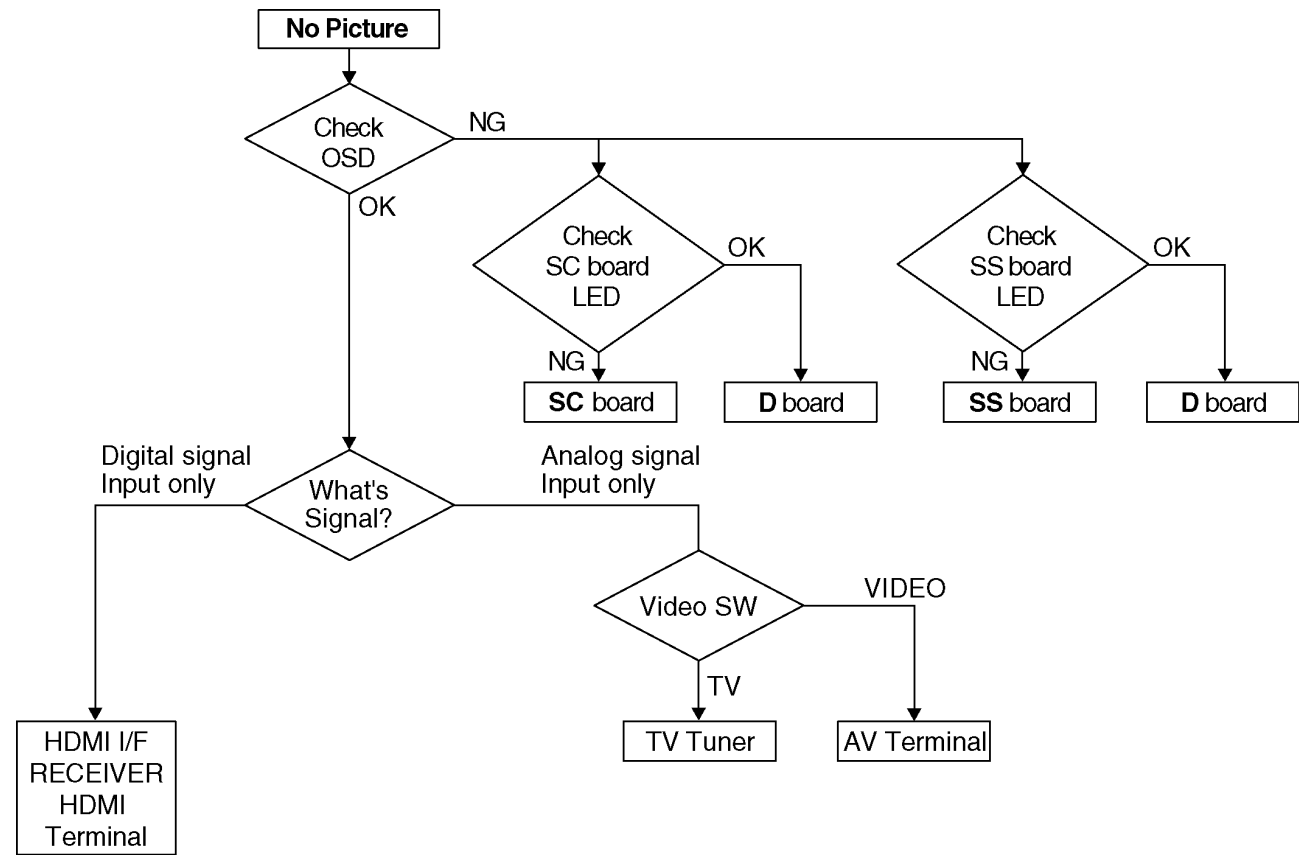

Drive circuits LED indicator

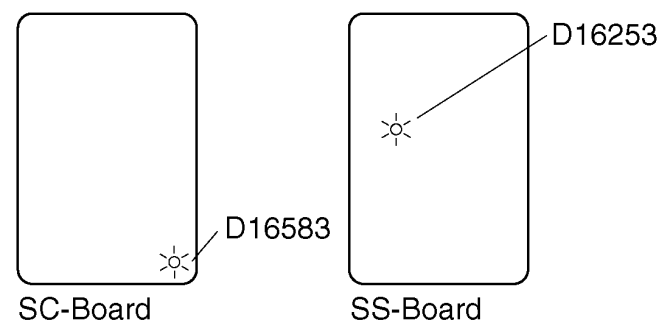

6.5. Local screen failure

Plasma display may have local area failure on the screen. Fig-1 is the possible defect P.C.B. for each local area.

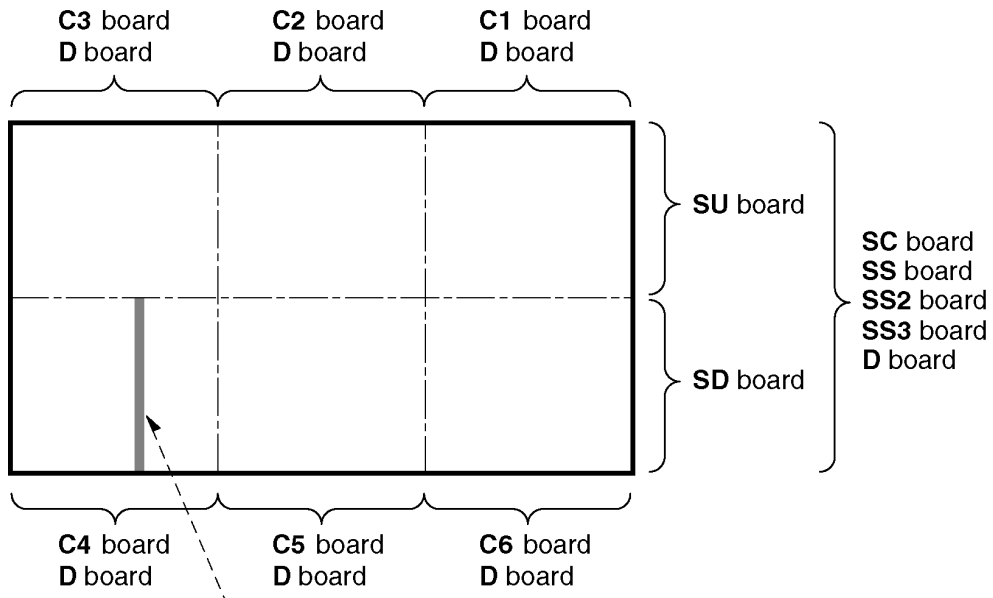


Fig-1

7 Disassembly and Assembly Instructions

7.1. Remove the Back cover


1. See Service Hint (Section 3)

7.2. Remove the P-Board


Caution:

To remove P.C.B. wait 1 minute after power was off for discharge from electrolysis capacitors.

1. Unlock the cable clampers to free the cable.
2. Disconnect the connectors (P2, P6, P7, P9, P11, P12 and P25).
3. Remove the screws (×8 ➡) and remove the P-Board unit.

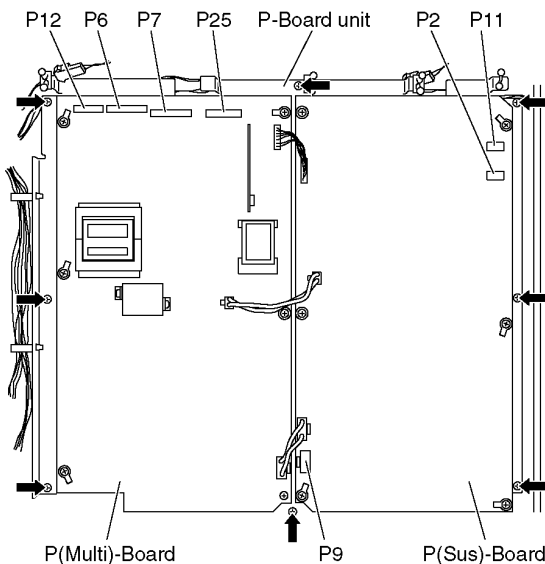


4. Remove the screws (×34 ➡) on the back side.

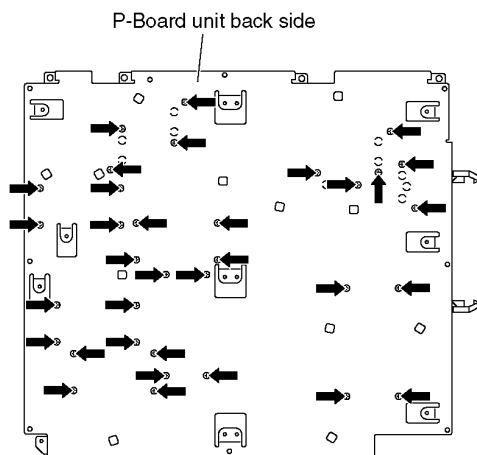


5. Disconnect the connectors (P51-P52, P53-P54 and P55-P56).

6. Remove the screws (×12 ➡).

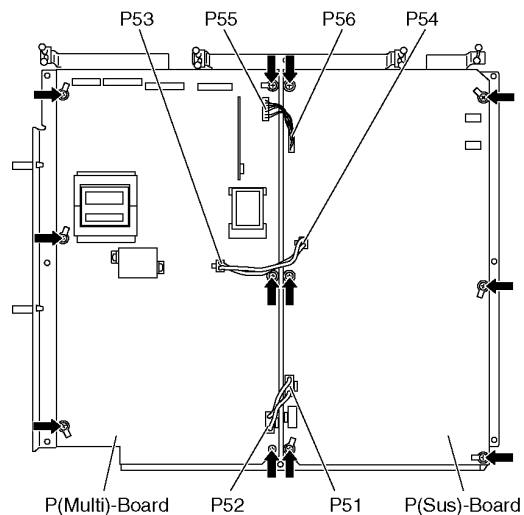


7. Remove the molding props (×6 ➡).
8. Remove the P(Multi)-Board.
9. Remove the molding props (×6 ➡).
10. Remove the P(Sus)-Board.

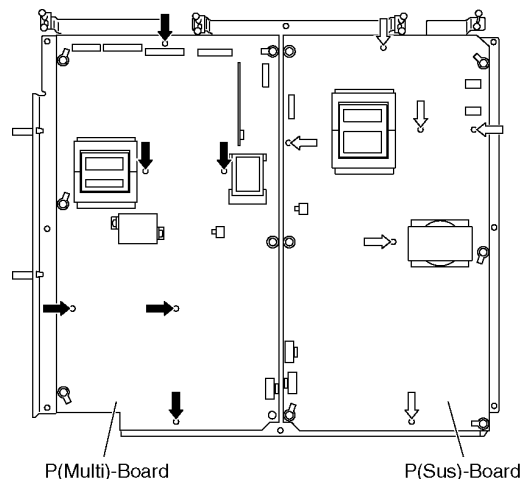


Note:

When assembling the P(Multi)-Board and the P(Sus)-Board, the position of each hole of the insulation sheets(A, B, C, D) is set to the position of each hole of the P(Multi)-Board and the P(Sus)-Board and then assemble them. (➡ marks indicate setting positions.)

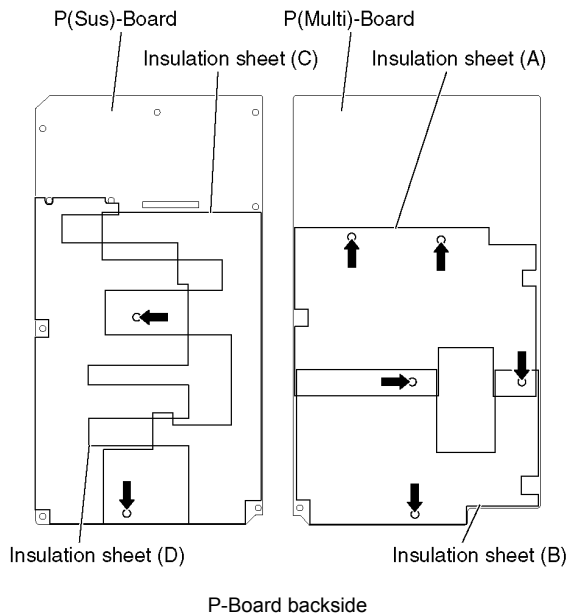


7.3. Remove the Rear terminal cover

1. Remove the screws (×6 ➡, ×4 ⇨, ×3 ⇨).
2. Remove the Rear Terminal cover.

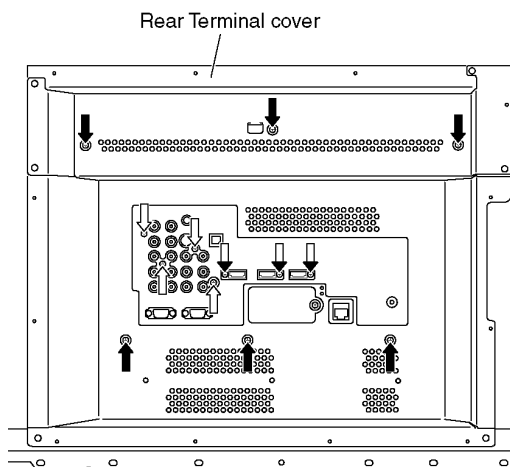


7.4. Remove the A-Board unit

1. Unlock the cable clampers to free the cable.
2. Remove the screw (×1 ⇨) and remove the Earth cable.
3. Disconnect the connectors (A1, A3, A5, A6, A7, A9, A10, A11, A12, A30 and A51).
4. Remove the screws (×4 ➡) and remove the A-Board unit.

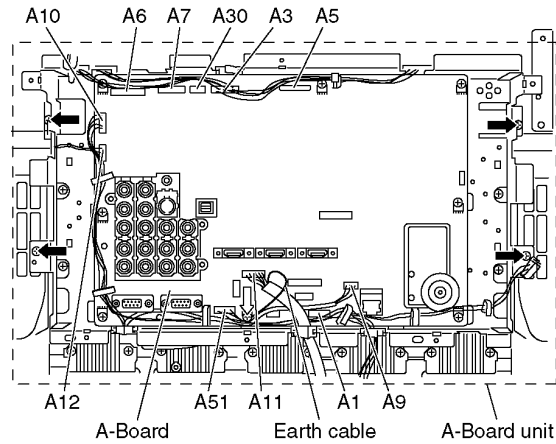



7.5. Remove the A-Board

1. Remove the A-Board unit. (See section 7.4.)
2. Remove the screws (×8 ➡) and remove the A-Board.

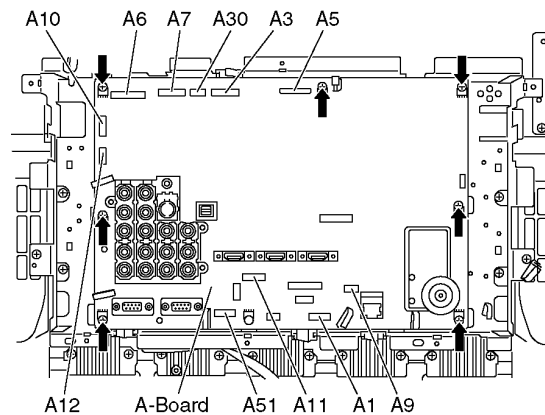


7.6. Remove the Speaker box assy (L, R)

1. Unlock the cable claspers to free the cable.
2. Disconnect the relay connectors.
3. Remove the screws (×4 ➡) and remove the Speaker box assy (L, R).

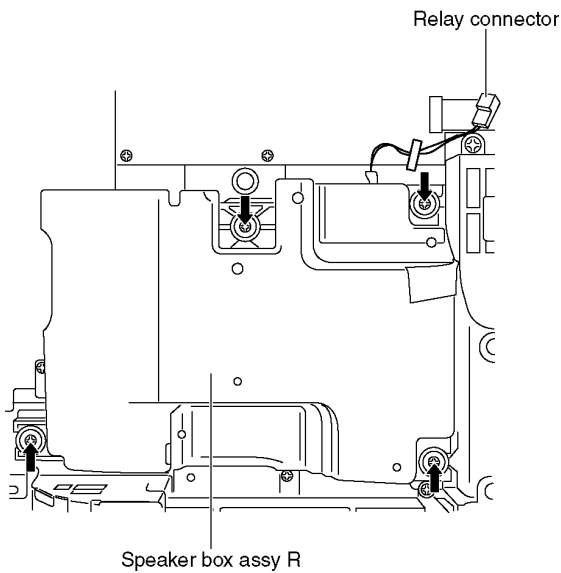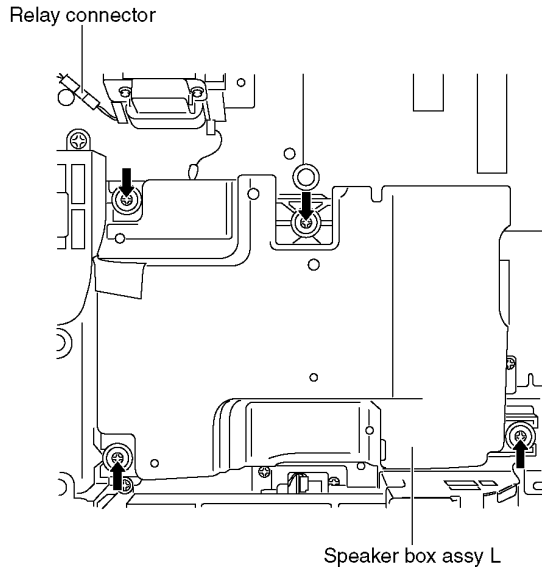


7.7. Remove the FFC Shield Metal (A) and remove the Core Holder (A)

1. Unlock the cable clasper to free the cable.
2. Remove the screws (×4 ➡) and remove the FFC Shield Metal (A).
3. Remove the screws (×3 ⇨) and remove the Core Holder (A).

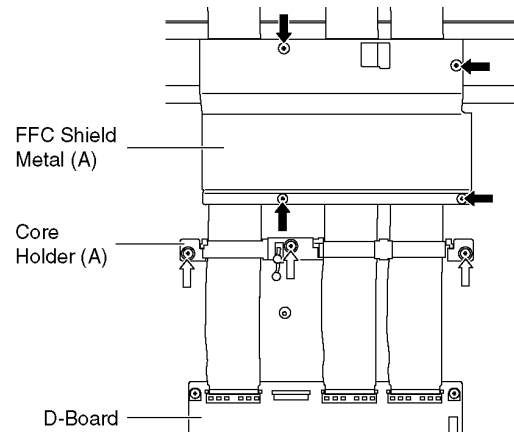


7.8. Remove the FFC Shield Metal (B) and remove the Core Holder (B)

1. Remove the screws (×2 ⇨) and remove the A-Board unit support metal.
2. Remove the screws (×4 ➡) and remove the FFC Shield Metal (B).
3. Remove the screws (×4 ⇨) and remove the Core Holder (B).

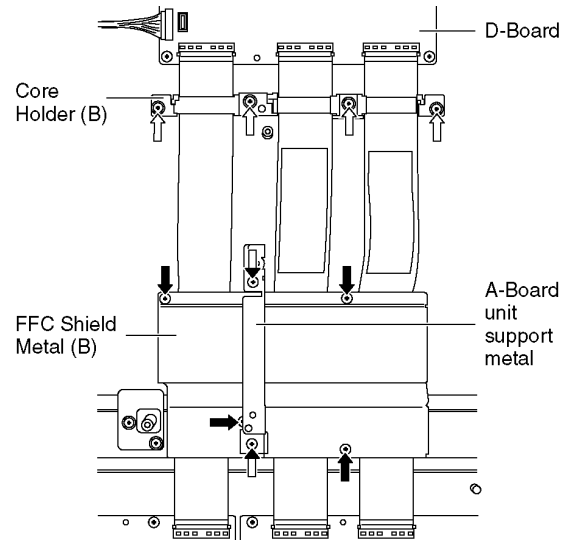


7.9. Remove the D-Board

1. Remove the A-Board unit. (See section 7.4.)
2. Disconnect the connectors (D3, D5 and D25).
3. Disconnect the flexible cables (D20, D31, D32, D33, D34, D35 and D36).
4. Remove the screws (×4 ➡) and remove the D-Board.

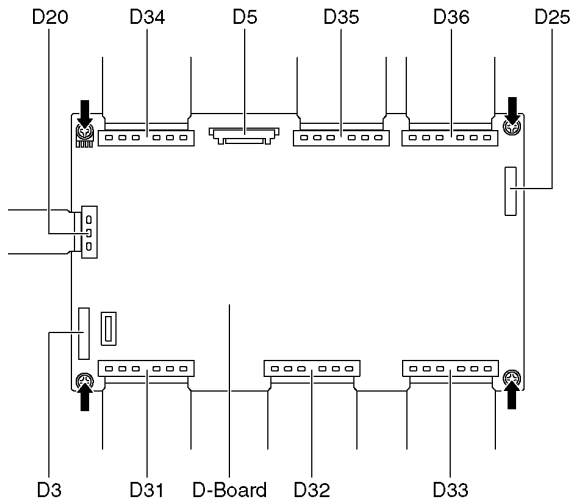


7.10. Remove the PB-Board

1. Disconnect the connectors (PB30, PB31, PB32, PB36 and PB37).
2. Remove the screws (×2 ➡).
3. Remove the PB-Board.

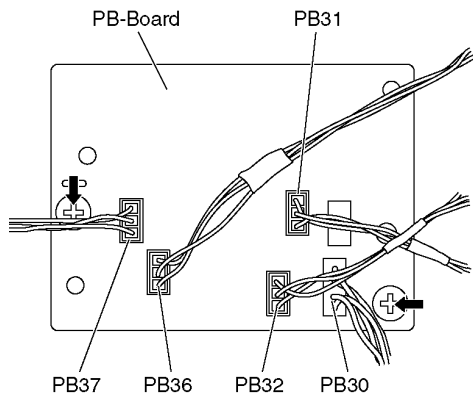


7.11. Remove the SU-Board

1. Remove the flexible cables (SU1B, SU2B, SU3B, SU4B and SU5B).
2. Disconnect the flexible cable (SU11-SD11) and disconnect bridge connector (SU41-SC41).
3. Remove the screws (×3 ➡, ×3 ⇨) and remove the SU-Board.

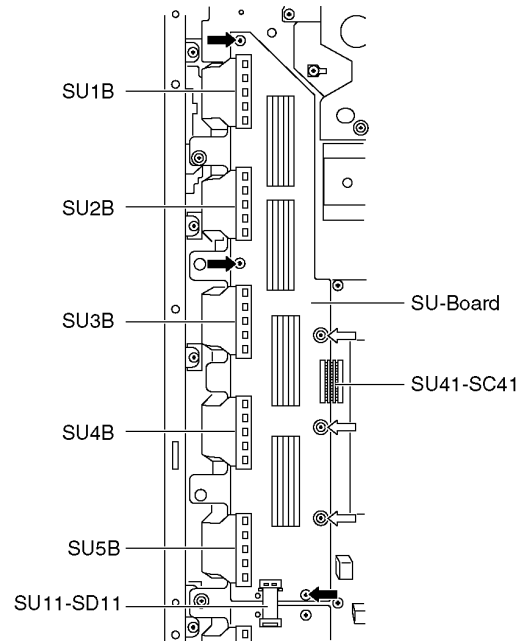


7.12. Remove the SD-Board

1. Disconnect the flexible cables (SD1B, SD2B, SD3B, SD4B and SD5B).
2. Disconnect the flexible cable (SD11-SU11) and disconnect bridge connectors (SD42-SC42 and SD46-SC46).
3. Remove the screws (×3 ➡, ×3 ⇨) and remove the SD-Board.

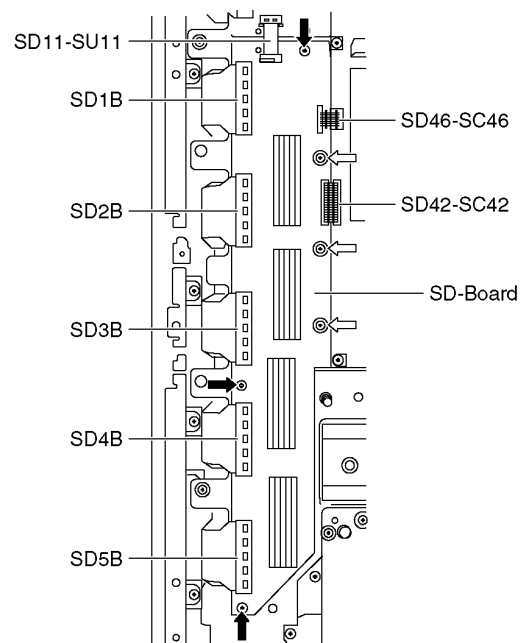


7.13. Remove the SC-Board

1. Remove the SU-Board and SD-Board. (See section 7.11. and 7.12.)
2. Disconnect the connectors (SC2 and SC20).
3. Remove the screws (×8 ➡) and remove the SC-Board.

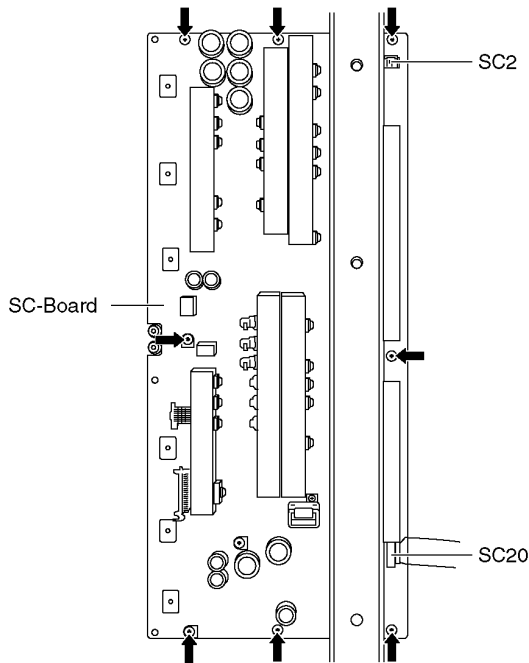


7.14. Remove the SS2-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the connector (SS32) and disconnect the flexible cables (SS51 and SS52).
3. Disconnect the bridge connector (SS02-SS21).
4. Remove the screws (×5 ➡) and remove the SS2-Board.

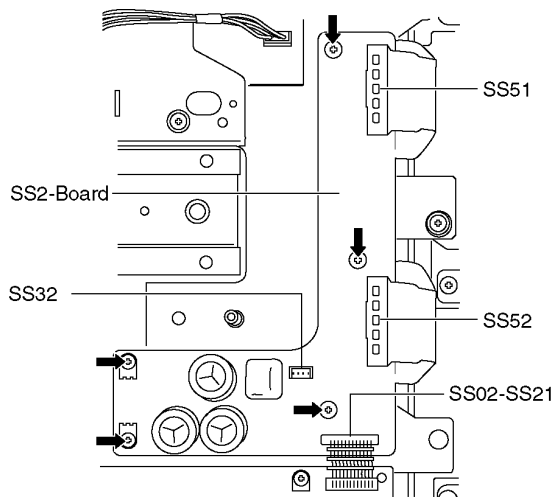


7.15. Remove the SS3-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the connector (SS35) and disconnect the flexible cables (SS57 and SS58).
3. Disconnect the bridge connector (SS03-SS22).
4. Remove the screws (×5 ➡) and remove the SS3-Board.

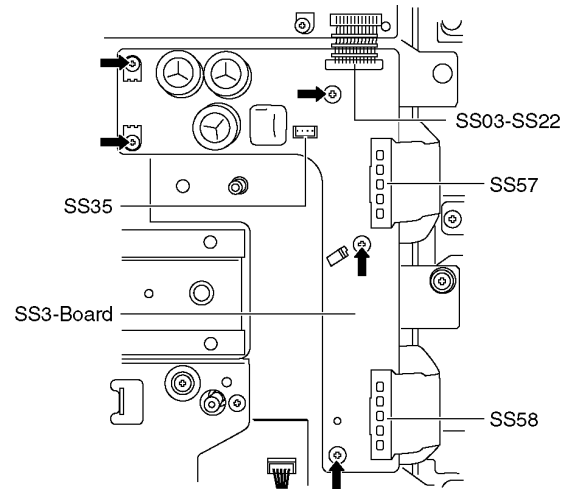


7.16. Remove the SS-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the connectors (SS11, SS12 and SS33).
3. Remove a short-jumper connector SS34 and re-use for new SS-Board.
4. Disconnect the flexible cables (SS53, SS54, SS55 and SS56).
5. Disconnect the bridge connectors (SS21-SS02 and SS22-SS03).
6. Remove the screws (×6 ➡) and remove the SS-Board.

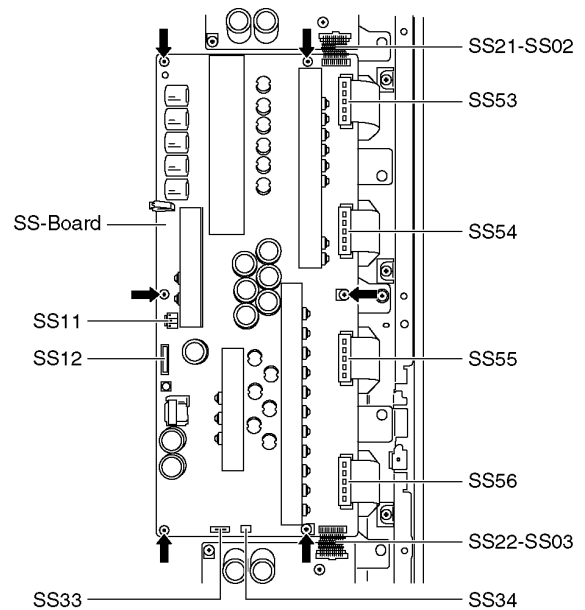


7.17. Remove the Vertical Bar (L, R) and the V-Bar fixing metal (A, B, C, D)

1. Remove the plasma panel section from the servicing stand and lay on a flat surface such as a table (covered), with the plasma panel surface facing downward. Spread a soft cloth or similar on the table for protection, so the panel surface is not scratched.
2. Remove the screws (×2 ➡ each) and remove the Vertical Bars (L, R).
3. Remove the screws (×2 ⇨ each) and remove the V-Bar fixing metal (A, B, C, D).

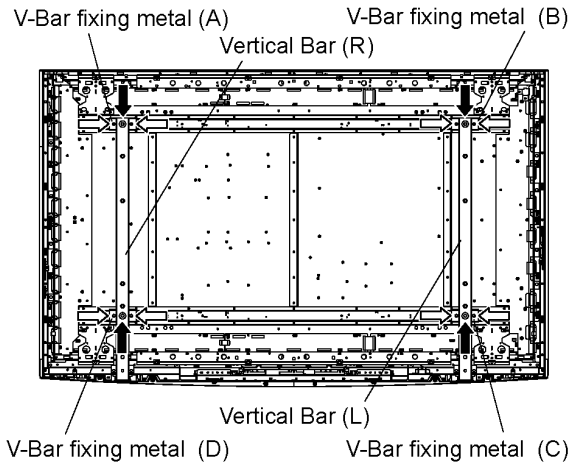


7.18. Remove the Fan unit (R) and Fan

1. Disconnect the relay coupler.
2. Remove the screws (×4 ➡) and remove the Fan unit (R).

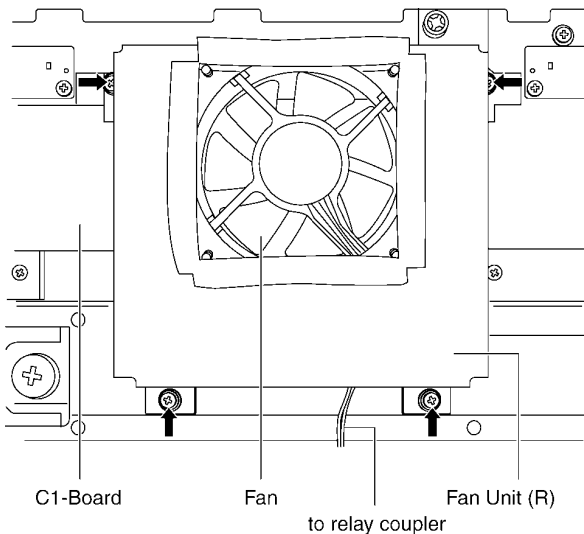


3. Remove the screws (×4 ⇨) and remove the Fan.

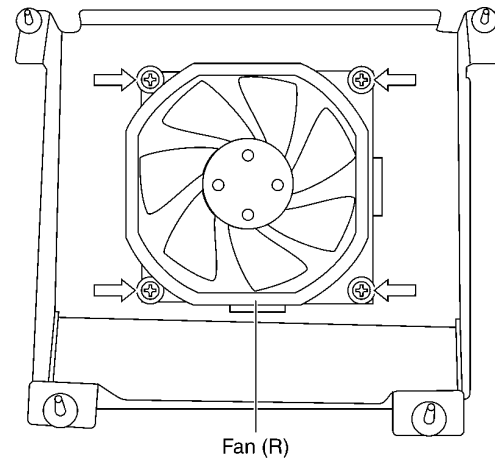


7.19. Remove the Fan unit (L) and Fans

1. Disconnect the relay couplers.
2. Remove the screws (×4 ➡) and remove the Fan unit (L).

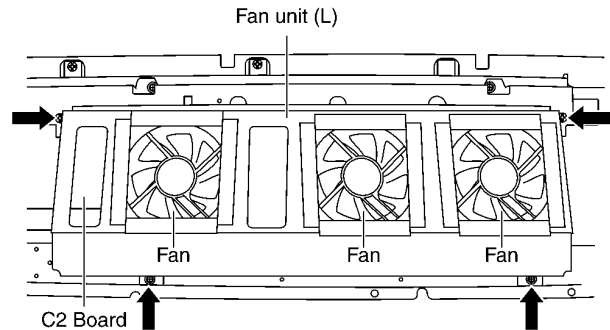


3. Remove the screws (×12 ⇨) and remove the Fans (×3).

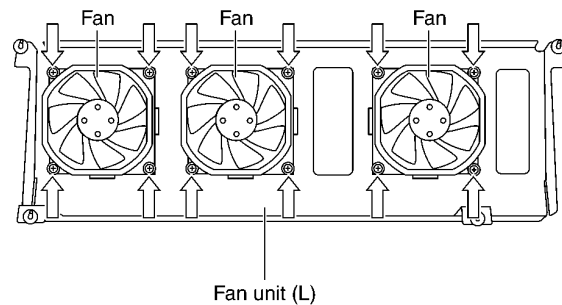


7.20. Remove the Cabinet-fixing metal (A) (Upper)

1. Remove the screws (×4 ➡ each).
2. Remove the Cabinet-fixing metal (A).

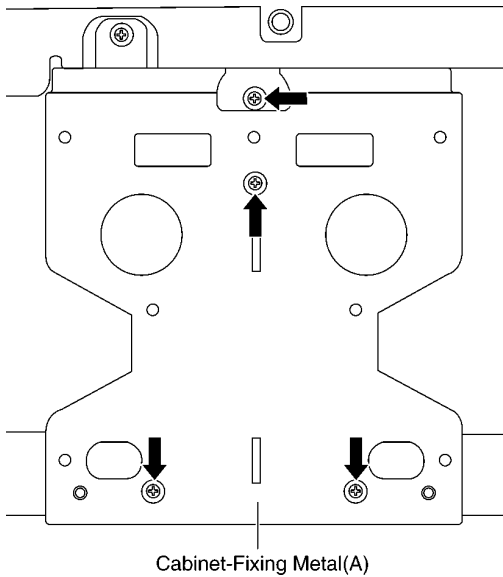


7.21. Remove the Support metal (L)

1. Remove the screws (×3 ➡, ×1 ⇨).
2. Remove the support metal (L).

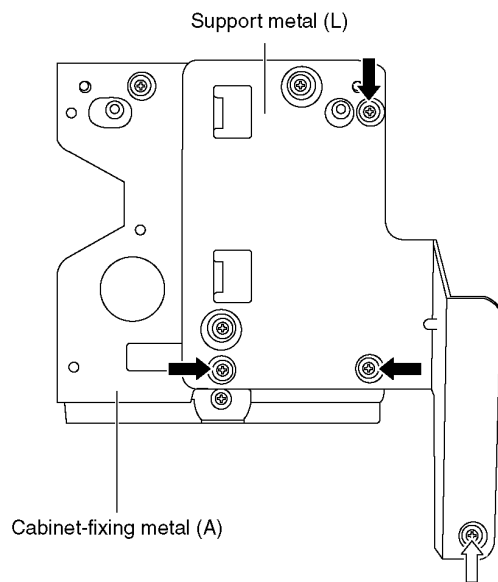


7.22. Remove the Support metal (R)

1. Remove the screws (×3 ➡, ×1 ⇨).
2. Remove the support metal (R).

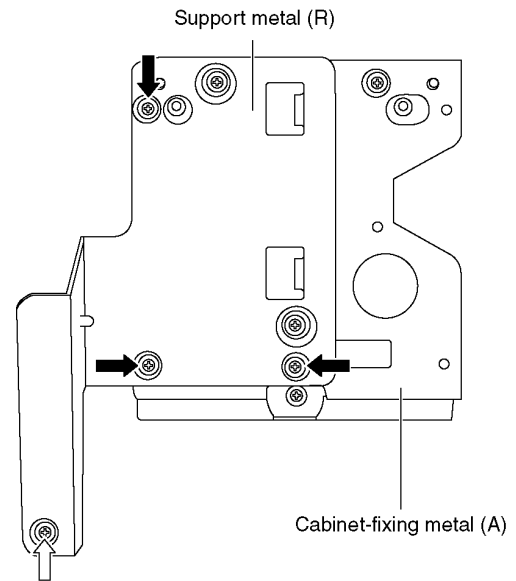


7.23. Remove the Cabinet-fixing metal (A) (Lower)

1. Remove the support metal (L, R). (See section 7.21. and 7.22.)
2. Remove the screws (×4 ➡ each).
3. Remove the Cabinet-fixing metal (A).

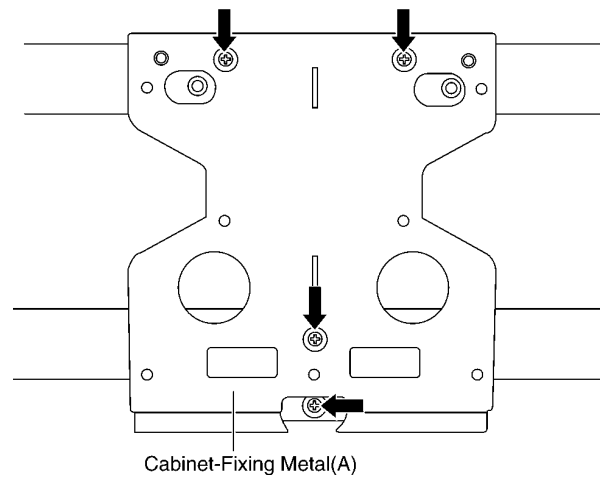


7.24. Remove the Plasma panel section from the Cabinet assy (glass)



1. Remove the Speaker box assy (L, R). (See section 7.6.)
2. Remove the Fan unit (R) and (L). (See section 7.18., 7.19.)
3. Remove the Cabinet-fixing metal (A). (See section 7.20. and 7.23.)
4. Remove the Cabinet assy and the plasma panel fastening screws ($\times 6 \rightarrow$, $\times 8 \Rightarrow$).

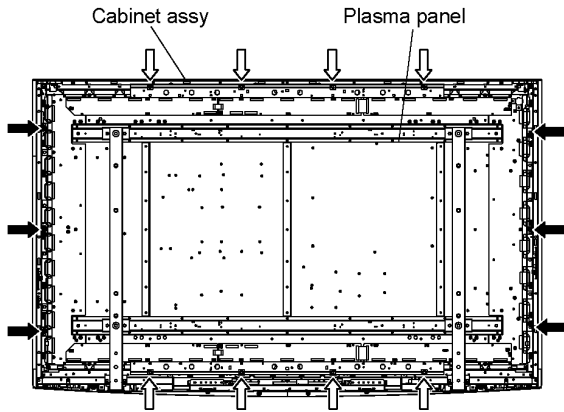

5. For leaving the plasma panel from the front frame, pull the bottom of the front frame forward, lift, and remove.

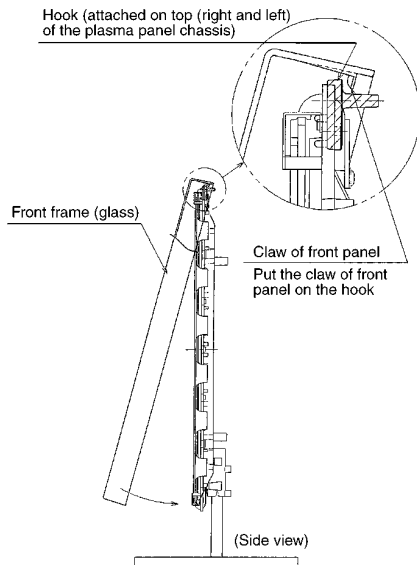


6. Remove the spacers and spacer rings ($\times 6 \rightarrow$).

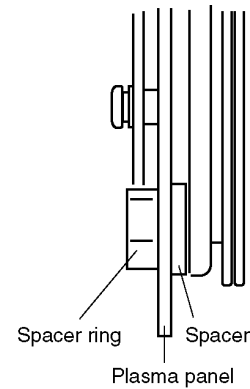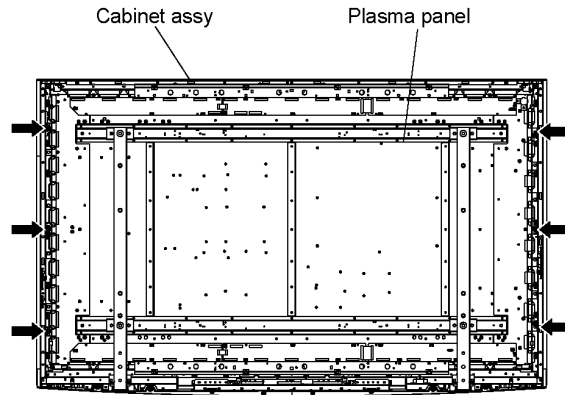


7.25. Remove the Cabinet-fixing metal (B) (Upper)

1. Remove the cabinet assy (glass). (See section 7.24.)
2. Remove the screws ($\times 6 \rightarrow$).
3. Remove the Cabinet-fixing metal (B).

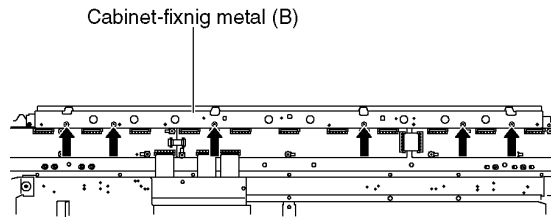


7.26. Remove the C1-Board

1. Remove the Fan unit (R). (See section 7.18.)
2. Remove the Cabinet-fixing metal (A) and (B). (See section 7.20. and 7.25.)
3. Remove the flexible cables holder fastening screws (×10 ⇨).
4. Disconnect the flexible cables (CA1, CA2, CA3, CA4 and CA5).
5. Disconnect the flexible cables (C10 and C11).
6. Remove the screws (×5 ⇨) and remove the C1-Board.

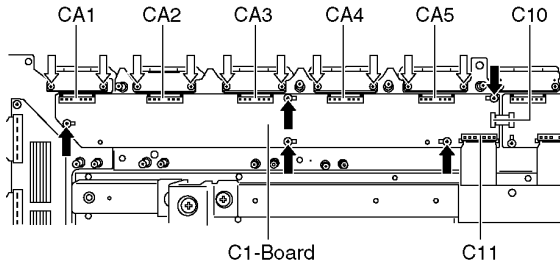


7.27. Remove the C2-Board

1. Remove the Fan unit (L). (See section 7.19.)
2. Remove the Cabinet-fixing metal (A) and (B). (See section 7.20. and 7.25.)
3. Remove the flexible cables holder fastening screws (×10 ⇨).
4. Disconnect the flexible cables (CA6, CA7, CA8, CA9, and CA10).
5. Disconnect the flexible cables (C20, C21, C22 and C23).
6. Remove the screws (×5 ⇨) and remove the C2-Board.

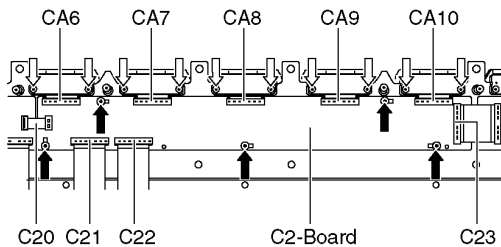


7.28. Remove the C3-Board

1. Remove the Fan unit (L). (See section 7.19.)
2. Remove the Cabinet-fixing metal (A) and (B). (See section 7.20. and 7.25.)
3. Remove the flexible cables holder fastening screws (×10 ⇨).
4. Disconnect the flexible cables (CA11, CA12, CA13, CA14 and CA15).
5. Disconnect the flexible cable (C33).
6. Disconnect the connector (C32).
7. Remove the screws (×5 ⇨) and remove the C3-Board.

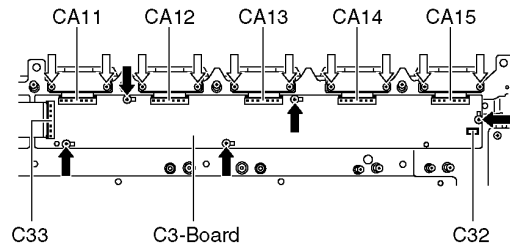


7.29. Remove the Cabinet-fixing metal (B) (Lower)

1. Remove the Cabinet assy (glass). (See section 7.24.)
2. Remove the screws (×4 ⇨).
3. Remove the Cabinet-fixing metal (B).

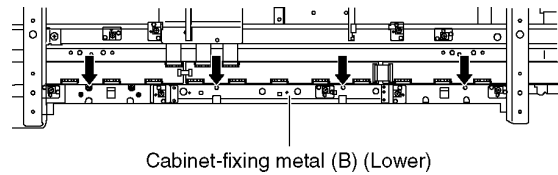


7.30. Remove the C4-Board

1. Remove the Cabinet-fixing metal (B). (See section 7.29.)
2. Remove the Vertical Bar (L). (See section 7.17.)
3. Remove the flexible cables holder fastening screws (×10 ⇨).
4. Disconnect the flexible cables (CB11, CB12, CB13, CB14 and CB15).
5. Disconnect the flexible cable (C41).
6. Disconnect the connector (C45).
7. Remove the screws (×5 ⇨) and remove the C4-Board.

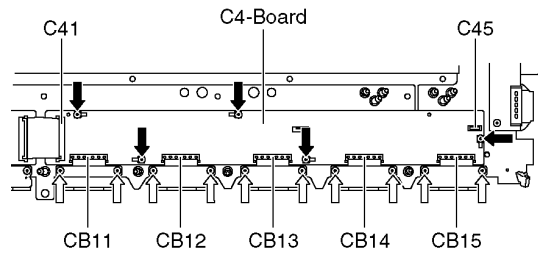


7.31. Remove the C5-Board

1. Remove the A-Board unit. (See section 7.4.)
2. Remove the Cabinet-fixing metal (B). (See section 7.29.)
3. Remove the flexible cables holder fastening screws (×10 ⇨).
4. Disconnect the flexible cables (CB6, CB7, CB8, CB9 and CB10).
5. Disconnect the flexible cables (C50, C51, C52 and C53).
6. Remove the screws (×5 ➡) and remove the C5-Board.

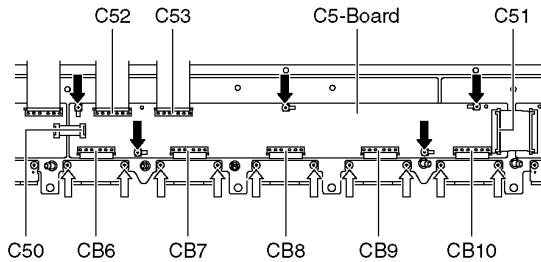


7.32. Remove the C6-Board

1. Remove the Cabinet-fixing metal (B). (See section 7.29.)
2. Remove the Vertical Bar (R). (See section 7.17.)
3. Remove the flexible cables holder fastening screws (×10 ⇨).
4. Disconnect the flexible cables (CB1, CB2, CB3, CB4 and CB5).
5. Disconnect the flexible cables (C60 and C61).
6. Remove the screws (×5 ➡) and remove the C6-Board.

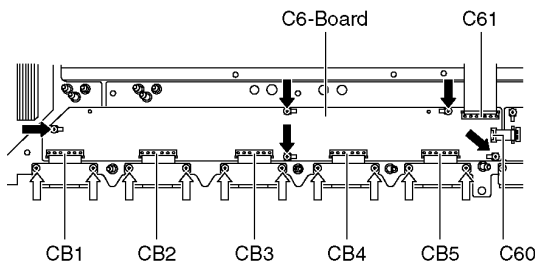


7.33. Remove the Speaker (Squawker)

1. Remove the screws (×4 ➡) and remove the Bottom support metal.

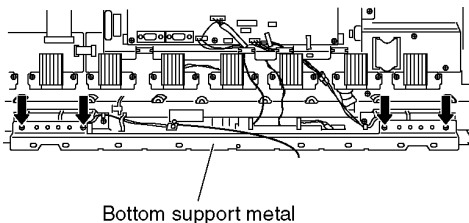


2. Disconnect the relay connectors.
3. Remove the screws (×2 ➡ each).

4. Remove the Speaker (Squawker/L, Squawker/R).

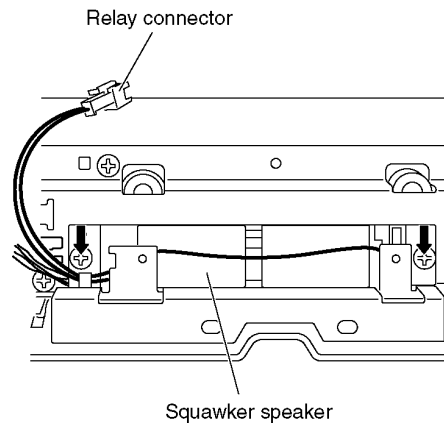


7.34. Remove the Front bracket

1. Remove the Bottom support metal. (See section 7.24.)
2. Unlock the cable clampers to free the cable.
3. Disconnect the connectors (GS02, GS09 and GH11).
4. Disconnect the connector (A51). (See section 7.4.)
5. Remove the screws (×3 ➡, ×2 ⇨) and remove the Front bracket.

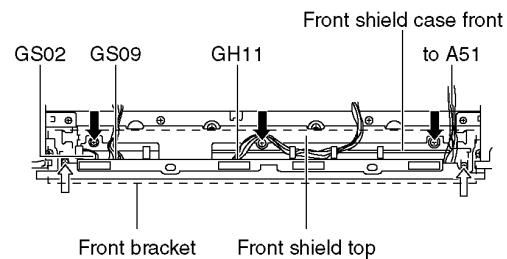


7.35. Remove the G-Board, GS-Board and GH-Board


1. Remove the Front bracket. (See section 7.34.)
2. Remove the screws (×5 ➡).

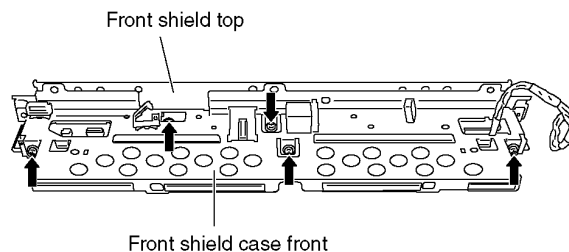

3. Remove the screws (×4 ⇨).
4. Remove the Front shield case front and the Front shield top.

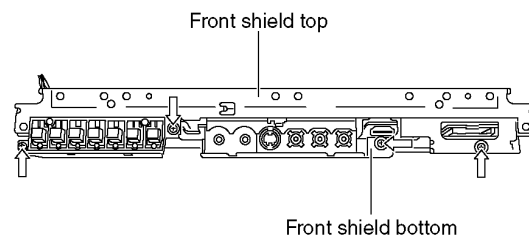


5. Remove the GH-Board.
6. Remove the screws (×2 ➡) and remove the GS-Board.
7. Remove the screws (×3 ⇨).
8. Disconnect the connector (G51) and remove the G-Board.

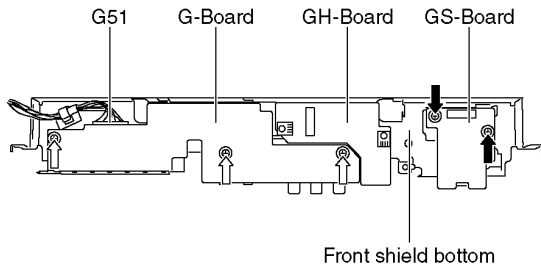


7.36. Remove the K-Board and S-Board


1. Remove the Cabinet assy. (See section 7.24.)
2. Remove the Speaker (Squawker /L). (See section 7.33.)
3. Remove the screws (×5 ➡) and remove the Bottom shield L.

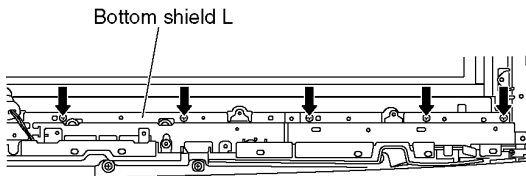


4. Disconnect the connector (S2).
5. Remove the screws (×2 ➡) and remove the S-Board unit.

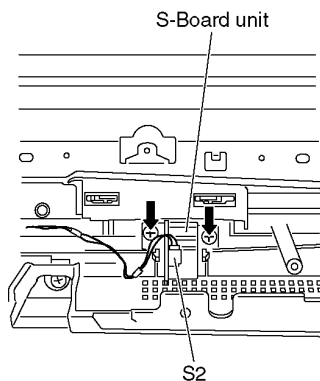

6. Remove the screw (×1 ➡) and remove the S-Board.

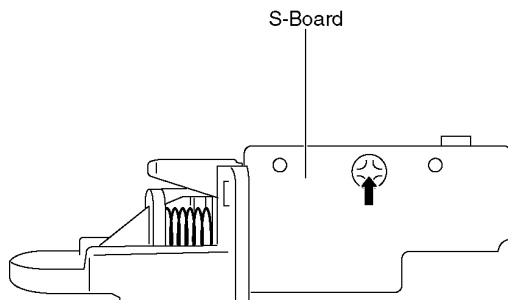


7. Remove the screws (×2 ➡).
8. Remove the K-Board and disconnect the connector (K1).

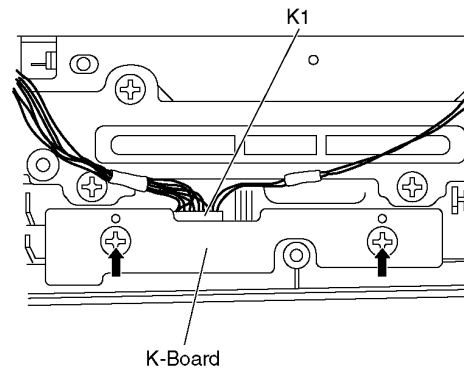


7.37. Remove the GL-Board


1. Remove the Cabinet assy. (See section 7.24.)
2. Remove the Speaker (Squawker /R). (See section 7.33.)
3. Remove the Bottom shield L. (See section 7.36.)
4. Remove the screws (×5 ➡) and remove the Bottom shield R.

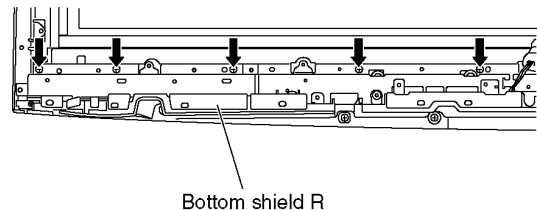

5. Remove the screws (×8 ➡) and remove the Bottom plate.

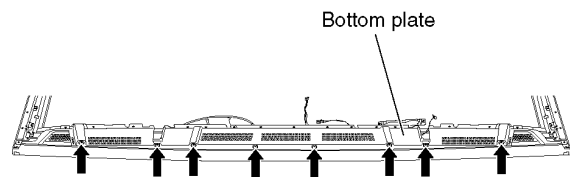

6. Remove the screws (×2 ➡) and remove the GL-Board and disconnect the connector (GL02).

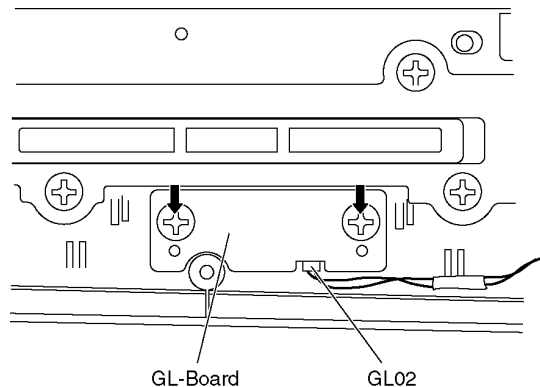

7.38. Replace the plasma panel (finished)

1. Place the new plasma panel (finished) on the flat surface of the table (covered by a soft cloth), with the plasma panel surface facing downward.
2. Attach the C1, C2, C3,C4,C5-Board and the C6-Board, connect the flexible cables (×30) from the Plasma panel to the C1, C2, C3,C4,C5-Board and the C6-Board, and fit the flexible cable holders.
3. Attach the Hooks (left, right) and fit the Vertical Bar (L, R) and the V-Bar fixing metal (A, B, C, D) to the new plasma panel.
4. Place the plasma panel section on the servicing stand.
5. Attach the cabinet assy and each P.C.Board and so on, to the new plasma panel.


*** When fitting the cabinet assy, be careful not to allow any debris, dust or handling residue to remain between the front glass and plasma panel.**

8.1.2. Initialization Pulse Adjust

1. Input the White signal to plasma video input.
2. Set the picture controls as follows.
Picture menu : Vivid
Normal : Set
Aspect : Full
3. Connect Oscilloscope to TPSC1 (SC).
Check the voltage (T2) at 100 us period on the down slop.

	Test point	Volume	Level
T2	TPSC1 (SC)	VR16602 (SC)	250 V $\pm$ 10 V

TPSC1

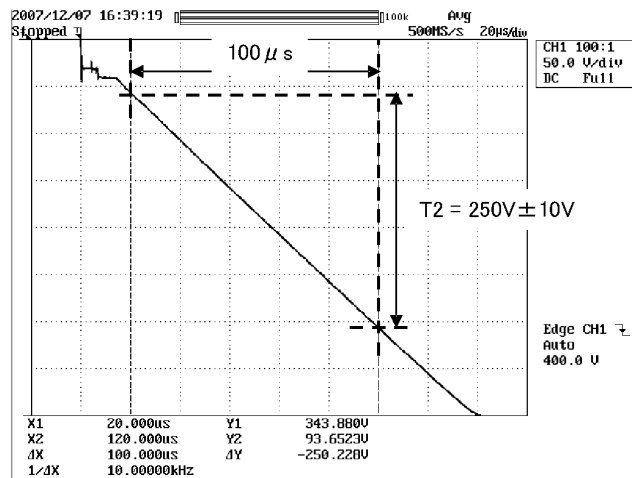

8.1.3. P.C.B. (Printed Circuit Board) exchange

8.1.3.1. Caution

1. To remove P.C.B. , wait 1 minute after power was off for discharge from electrolysis capacitors.

8.1.3.2. Quick adjustment after P.C.B. exchange

Adjust the following voltages with the multimeter.


P.C.B.	Name	Test Point	Voltage	Volume	Remarks
P Board	Vsus	TPVSUS (SS)	Vsus $\pm$ 2V	VR251 (P)	*
SC Board	Vad	TPVAD (SC)	-120V $\pm$ 1V	VR16600 (SC)	
SS Board	Ve	TPVE (SS)	Ve $\pm$ 1V	VR16000 (SS)	*
A, D Board	White balance and Sub brightness for NTSC, PAL, HD, PC and 625i signals				

*See the Panel label.


Caution:

Absolutely do not reduce Vsus below Ve not to damage the P.C.B.

8.1.4. Adjustment Volume Location

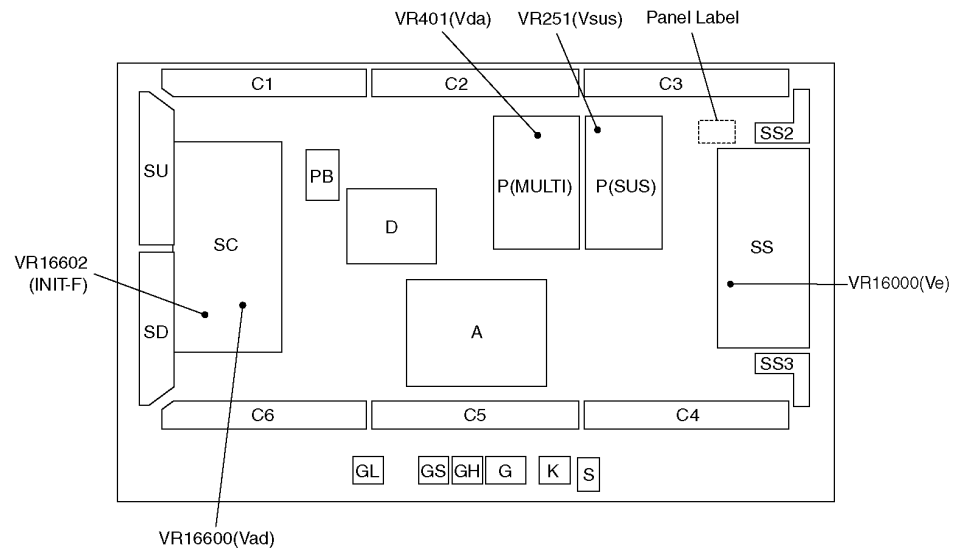

8.1.5. Test Point Location

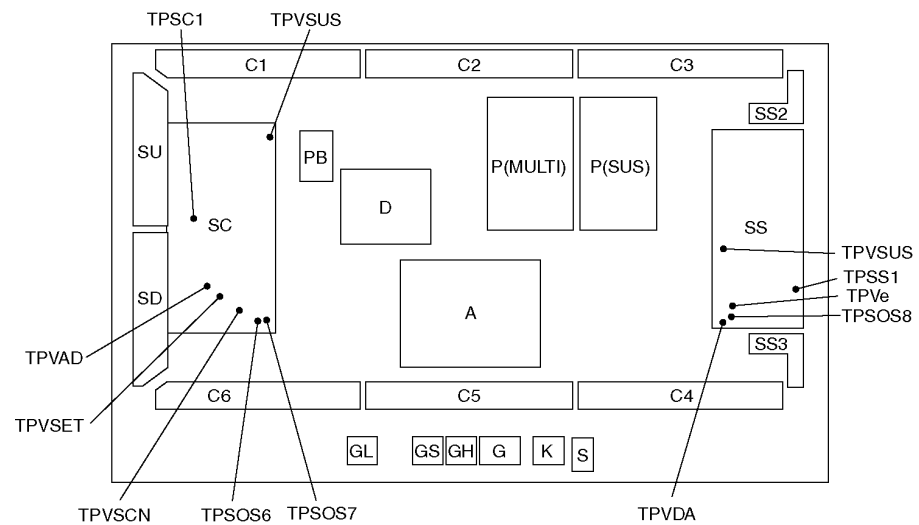

8.2. Adjustment

8.2.1. White balance adjustment

Name of measuring instrument	Connection	Remarks								
• W/B pattern • Color analyzer (Minolta CA-100 or equivalent)	Component input Panel surface									
Procedure		Remarks								
• Make sure the front panel to be used on the final set is fitted. • Make sure a color signal is not being shown before adjustment. • Put the color analyzer where there is little color variation. 1. Output a white balance pattern. 2. Check that the color temperature is [Cool]. 3. Set to serviceman mode, WB-ADJ. 4. Set [R-CUT] [G-CUT] [B-CUT] the values written in table 1. 5. Attach the sensor of color analyzer to the center of highlight window. 6. Fix G drive at C0h and adjust [B-DRV] and [R-DRV] so x, y value of color analyzer become the [Color temperature High] in table 2. 7. Increase RGB together so the maximum drive value in RGB becomes FC. That is, set [ALL DRIVE] to FC. Execute adjustment again. When that, the maximum value of R/G/B DRV should be FC, and either R/G/B DRV should be FC. 8. Set color temperature to [Normal]. 9. Set [R-CUT] [G-CUT] [B-CUT] the values written in table 1. 10. Attach the sensor of color analyzer to the center of highlight window. 11. Fix G drive at C0h and adjust [B-DRV] and [R-DRV] so x, y value of color analyzer become the [Color temperature Mid] in table 2. 12. Increase RGB together so the maximum drive value in RGB becomes FC. That is, set [ALL DRIVE] to FC. Execute adjustment again. When that, the maximum value of R/G/B DRV should be FC, and either R/G/B DRV should be FC. 13. Set color temperature to [Warm]. 14. Set [R-CUT] [G-CUT] [B-CUT] the values written in table 1. 15. Attach the sensor of color analyzer to the center of highlight window. 16. Fix G drive at C0h and adjust [B-DRV] and [R-DRV] so x, y value of color analyzer become the [Color temperature Low] in table 2. 17. Increase RGB together so the maximum drive value in RGB becomes FC. That is, set [ALL DRIVE] to FC. Execute adjustment again. When that, the maximum value of R/G/B DRV should be FC, and either R/G/B DRV should be FC. 18. Set color temperature to [Cool]. - adjustment of [Normal] [Warm] by data shift from [Cool] adjust. - For [Normal] [Warm] adjustment, set values that the adjusted value of [Cool] plus the figures wrote below. <table><tr><td>Normal :</td><td>R-DRV : -3h</td><td>G-DRV : 0h</td><td>B-DRV : -1Bh</td></tr><tr><td>Warm :</td><td>R-DRV : 3h</td><td>G-DRV : 0h</td><td>B-DRV : -49h</td></tr></table> When the measurement data is not in the following tolerance by the shipping confirmation, please re-adjust. Tolerance : (x, y) = (setting data±0.007, setting data±0.007)		Normal :	R-DRV : -3h	G-DRV : 0h	B-DRV : -1Bh	Warm :	R-DRV : 3h	G-DRV : 0h	B-DRV : -49h	
Normal :	R-DRV : -3h	G-DRV : 0h	B-DRV : -1Bh							
Warm :	R-DRV : 3h	G-DRV : 0h	B-DRV : -49h							
19. Copy values adjusted by HD pattern to the NTSC data area of EEPROM.										

Table 1: R-CUT,G-CUT,B-CUT setting data

Color temperature	R-CUT	G-CUT	B-CUT
High(Cool)	80	80	80
Mid	80	80	80
Low(Warm)	80	80	80

Table 2: W/B adjustment values


Color temperature	x	y
High(Cool)	0.276	0.276
Mid	0.288	0.296
Low(Warm)	0.313	0.329

Table 3: EEPROM data addresses

SD/ Color temperature High	R-CUTOFF	022C
	G-CUTOFF	022D
	B-CUTOFF	022E
	R-DRIVE	032F
	G-DRIVE	0230
	B-DRIVE	0231
SD/ Color temperature Mid	R-CUTOFF	0232
	G-CUTOFF	0233
	B-CUTOFF	0234
	R-DRIVE	0235
	G-DRIVE	0236
	B-DRIVE	0237
SD/ Color temperature Low	R-CUTOFF	0238
	G-CUTOFF	0239
	B-CUTOFF	023A
	R-DRIVE	023B
	G-DRIVE	023C
	B-DRIVE	023D
HD/ Color temperature High	R-CUTOFF	023E
	G-CUTOFF	023F
	B-CUTOFF	0240
	R-DRIVE	0241
	G-DRIVE	0242
	B-DRIVE	0243
HD/ Color temperature Mid	R-CUTOFF	0244
	G-CUTOFF	0245
	B-CUTOFF	0246
	R-DRIVE	0247
	G-DRIVE	0248
	B-DRIVE	0249
HD/ Color temperature Low	R-CUTOFF	024A
	G-CUTOFF	024B
	B-CUTOFF	024C
	R-DRIVE	024D
	G-DRIVE	024E
	B-DRIVE	024F

9 Block Diagram


9.1. Block Diagram (1/7)

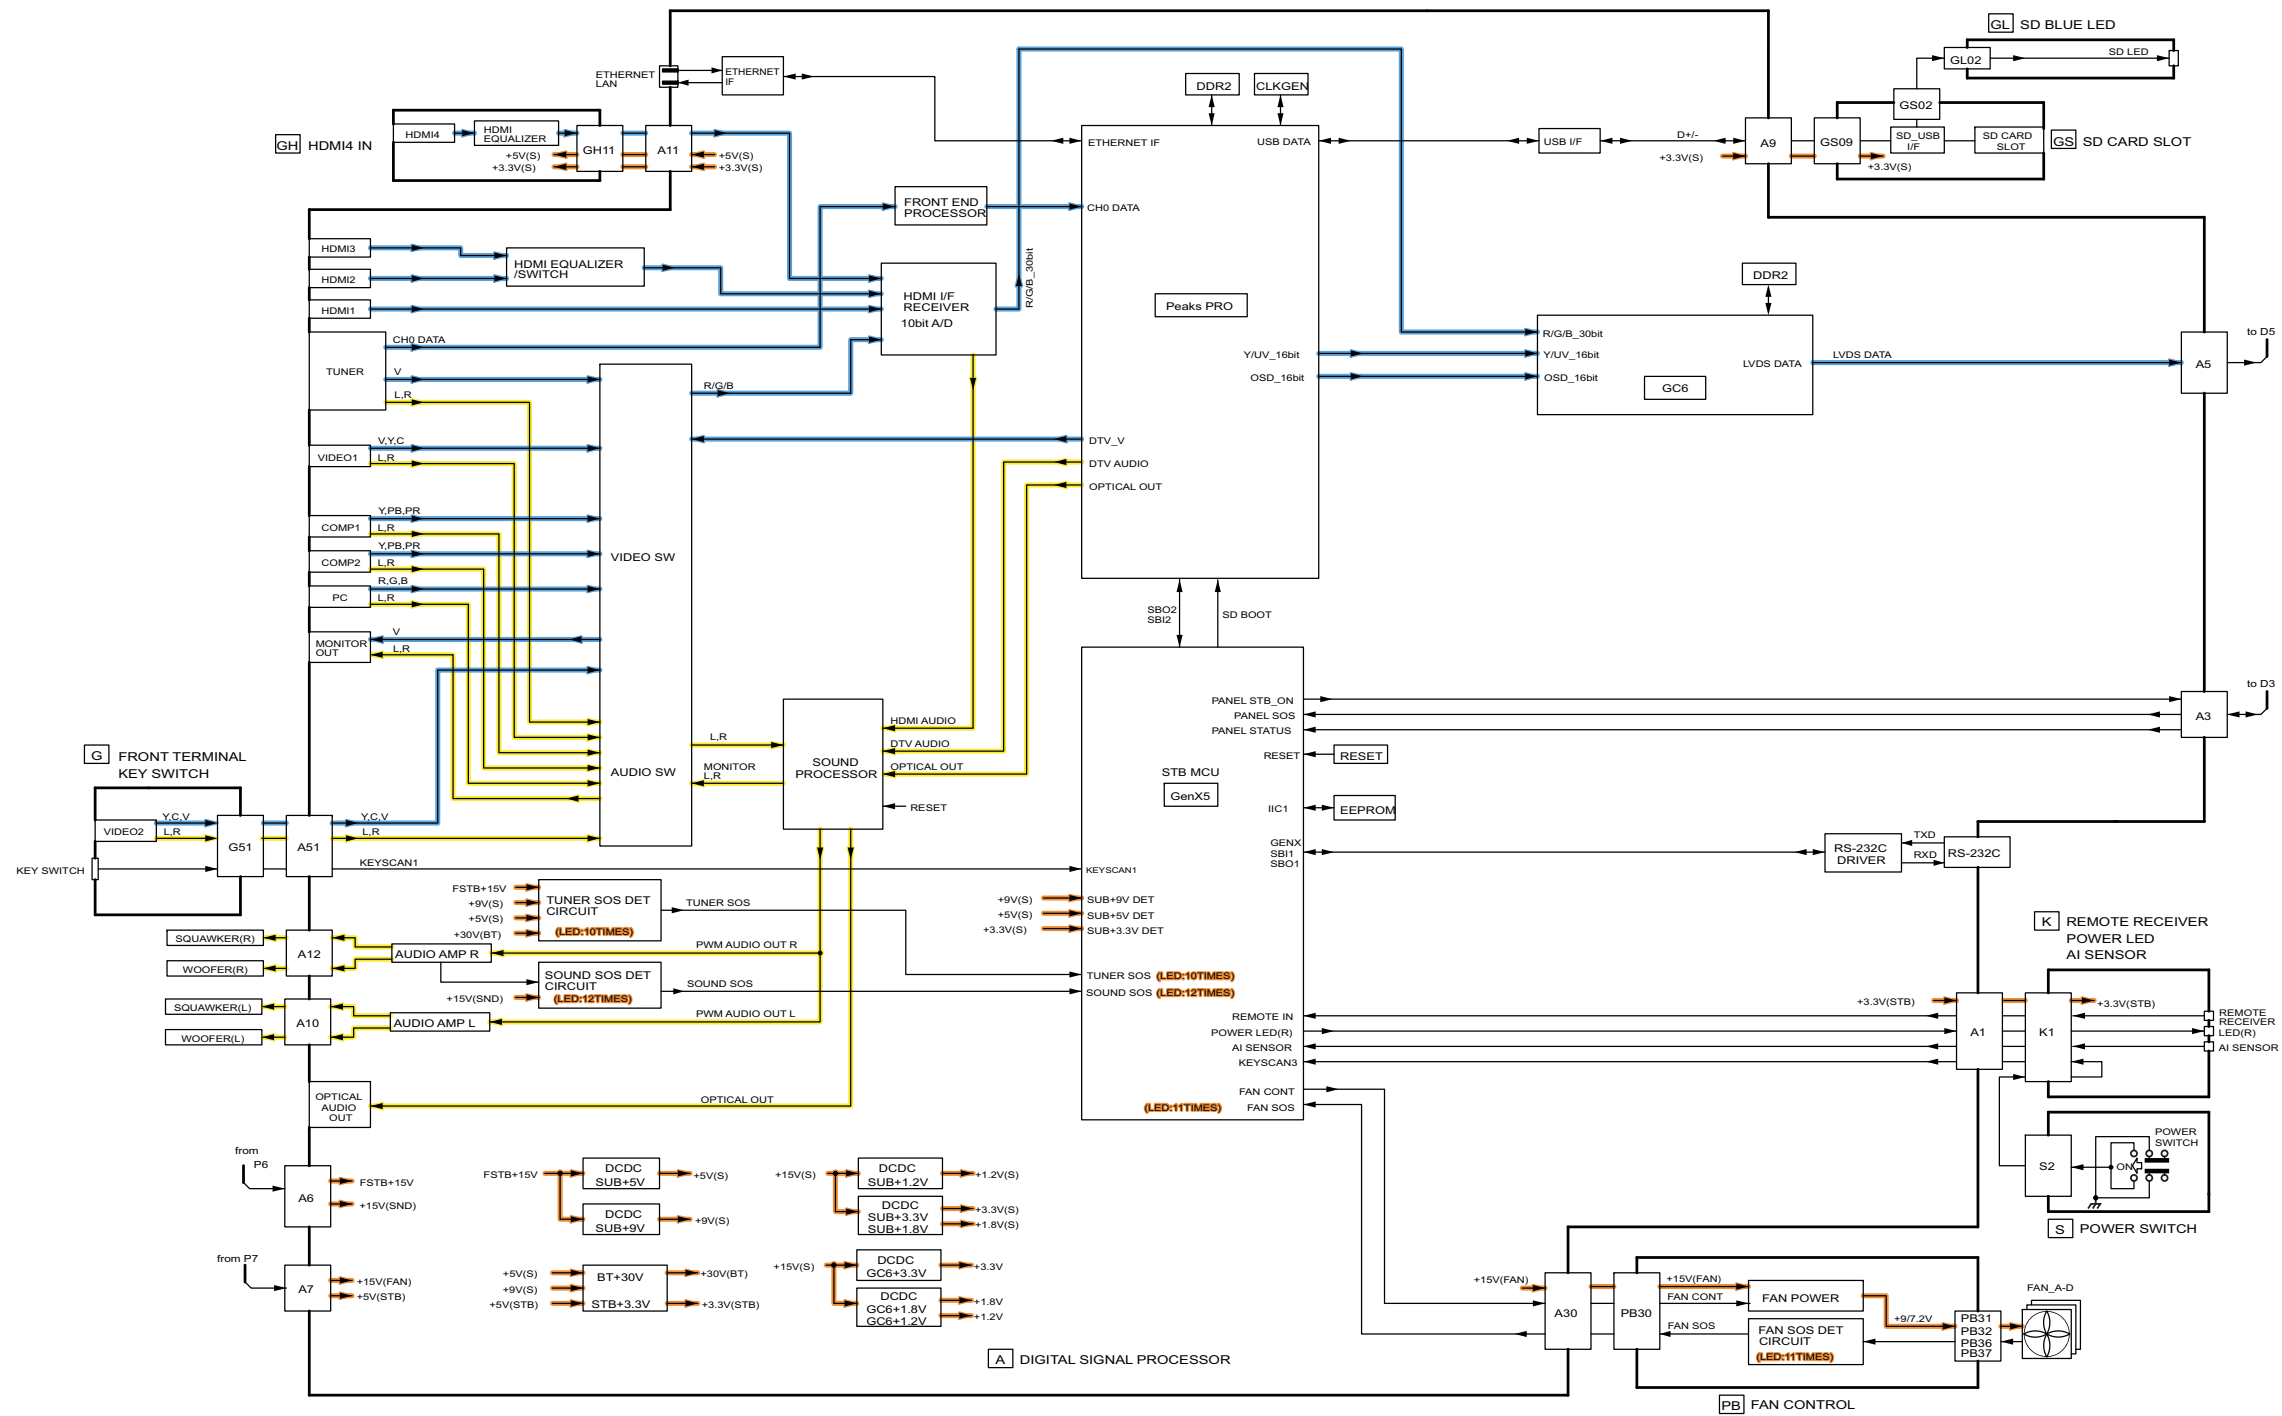

TH-65PZ850U
Block (1/7) Diagram

TH-65PZ850U
Block (1/7) Diagram


9.2. Block Diagram (2/7)

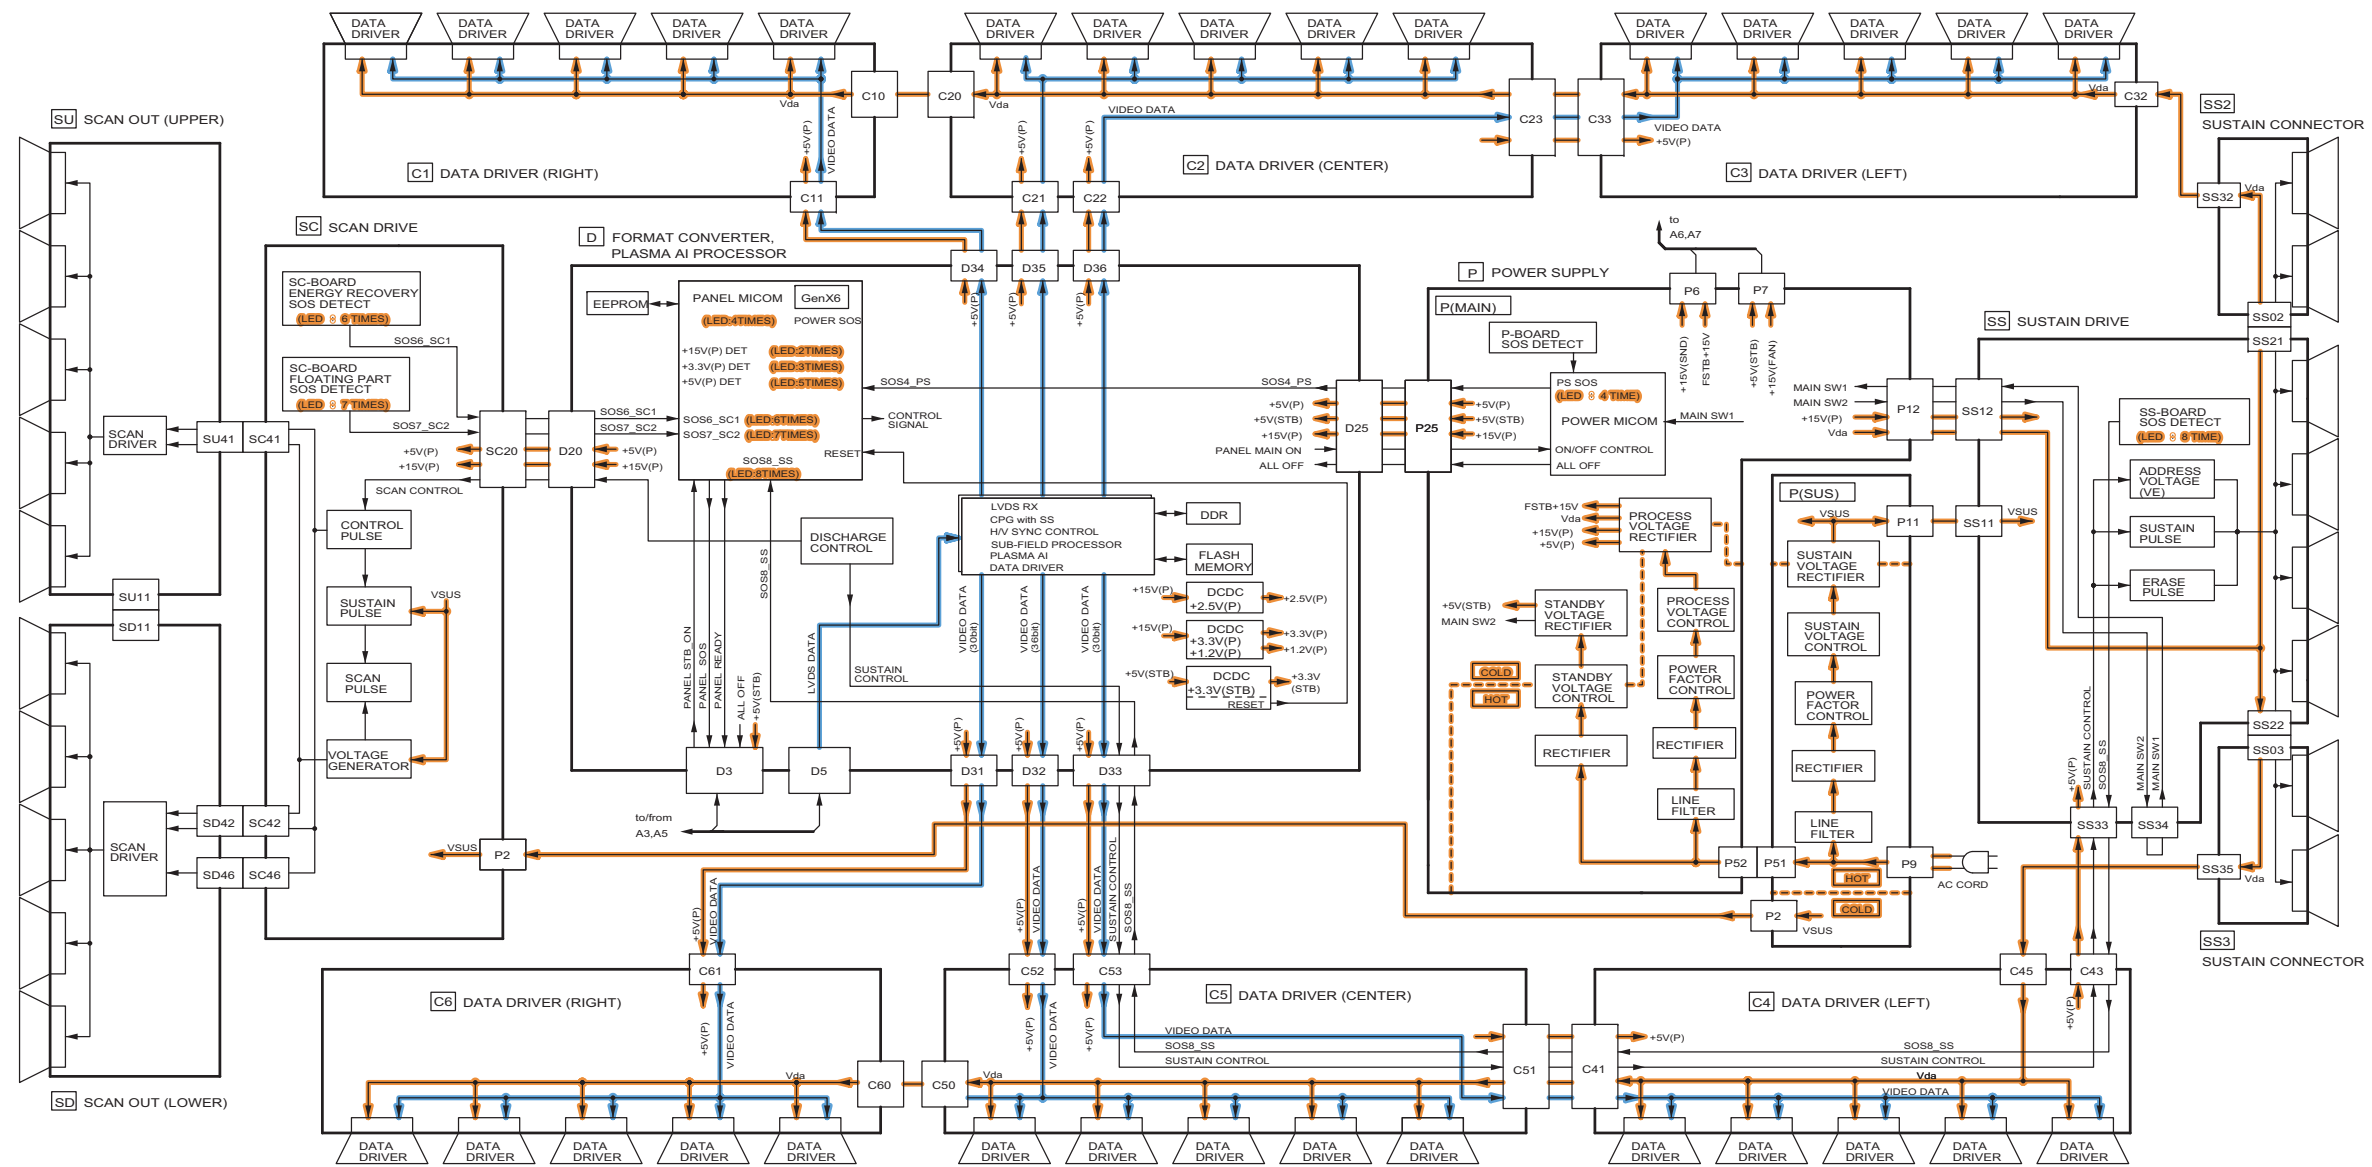


TH-65PZ850U
Block (2/7) Diagram

TH-65PZ850U
Block (2/7) Diagram

9.3. Block Diagram (3/7)




9.4. Block Diagram (4/7)

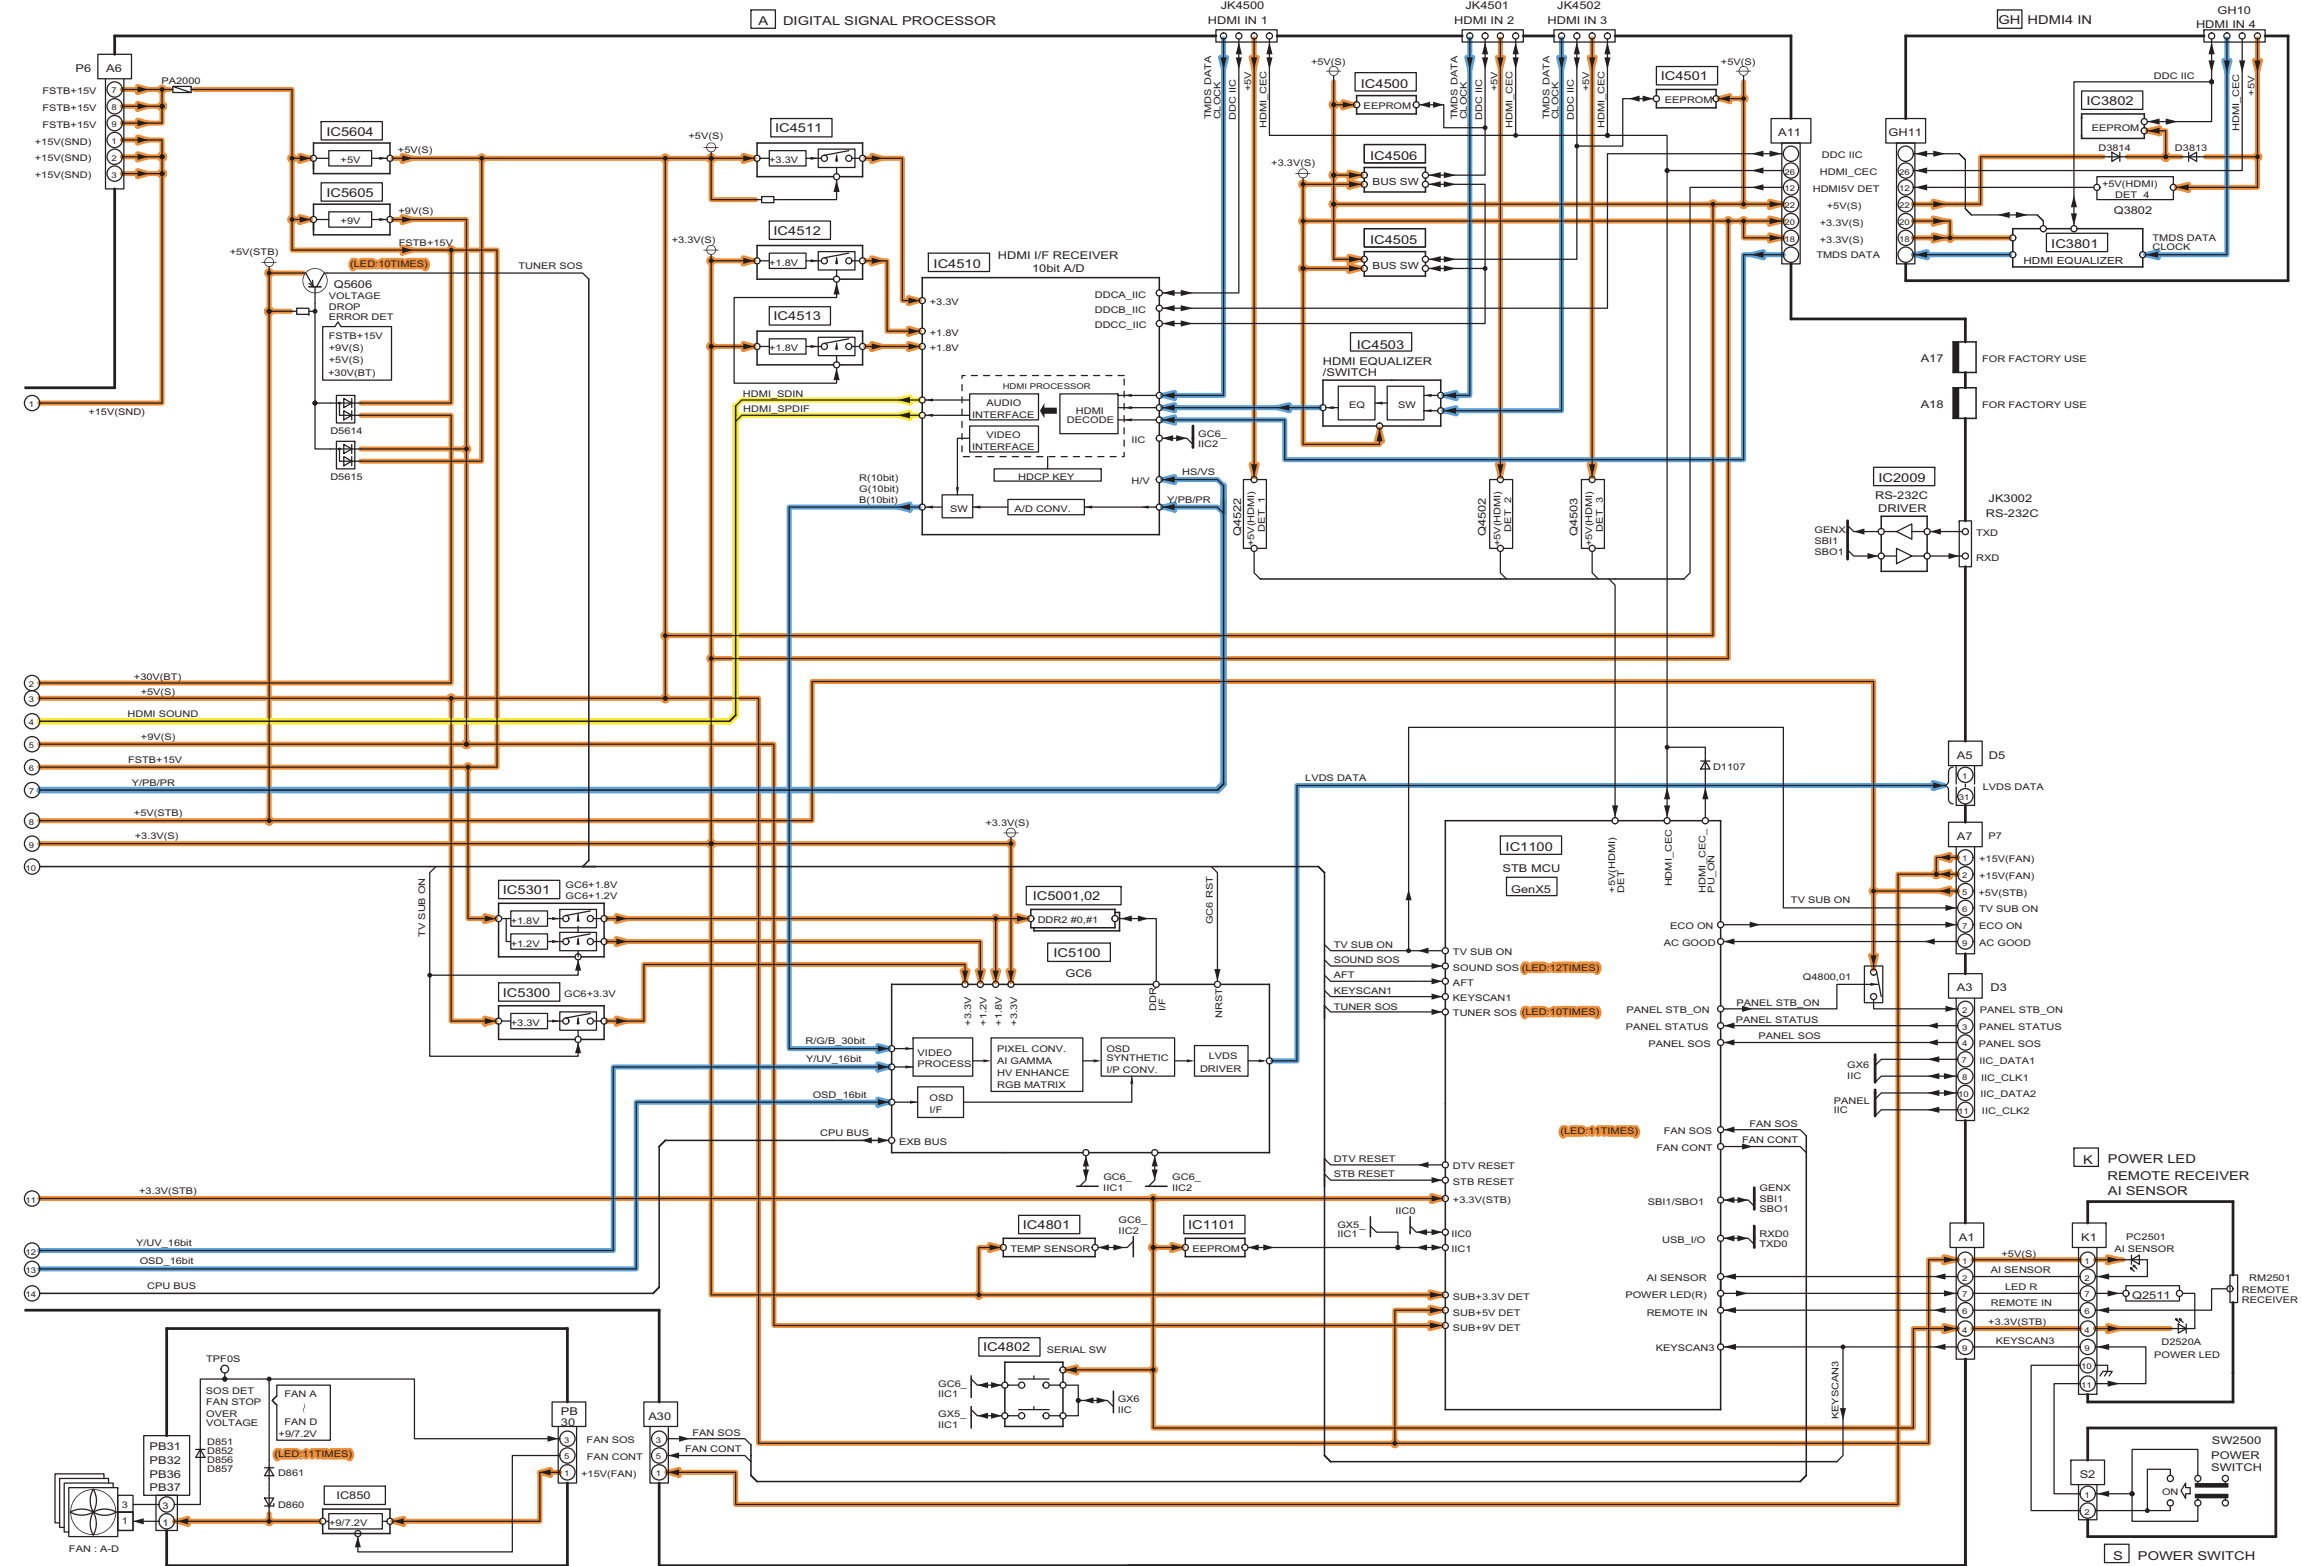


TH-65PZ850U PB FAN CONTROL
Block (4/7) Diagram

TH-65PZ850U
Block (4/7) Diagram

9.5. Block Diagram (5/7)

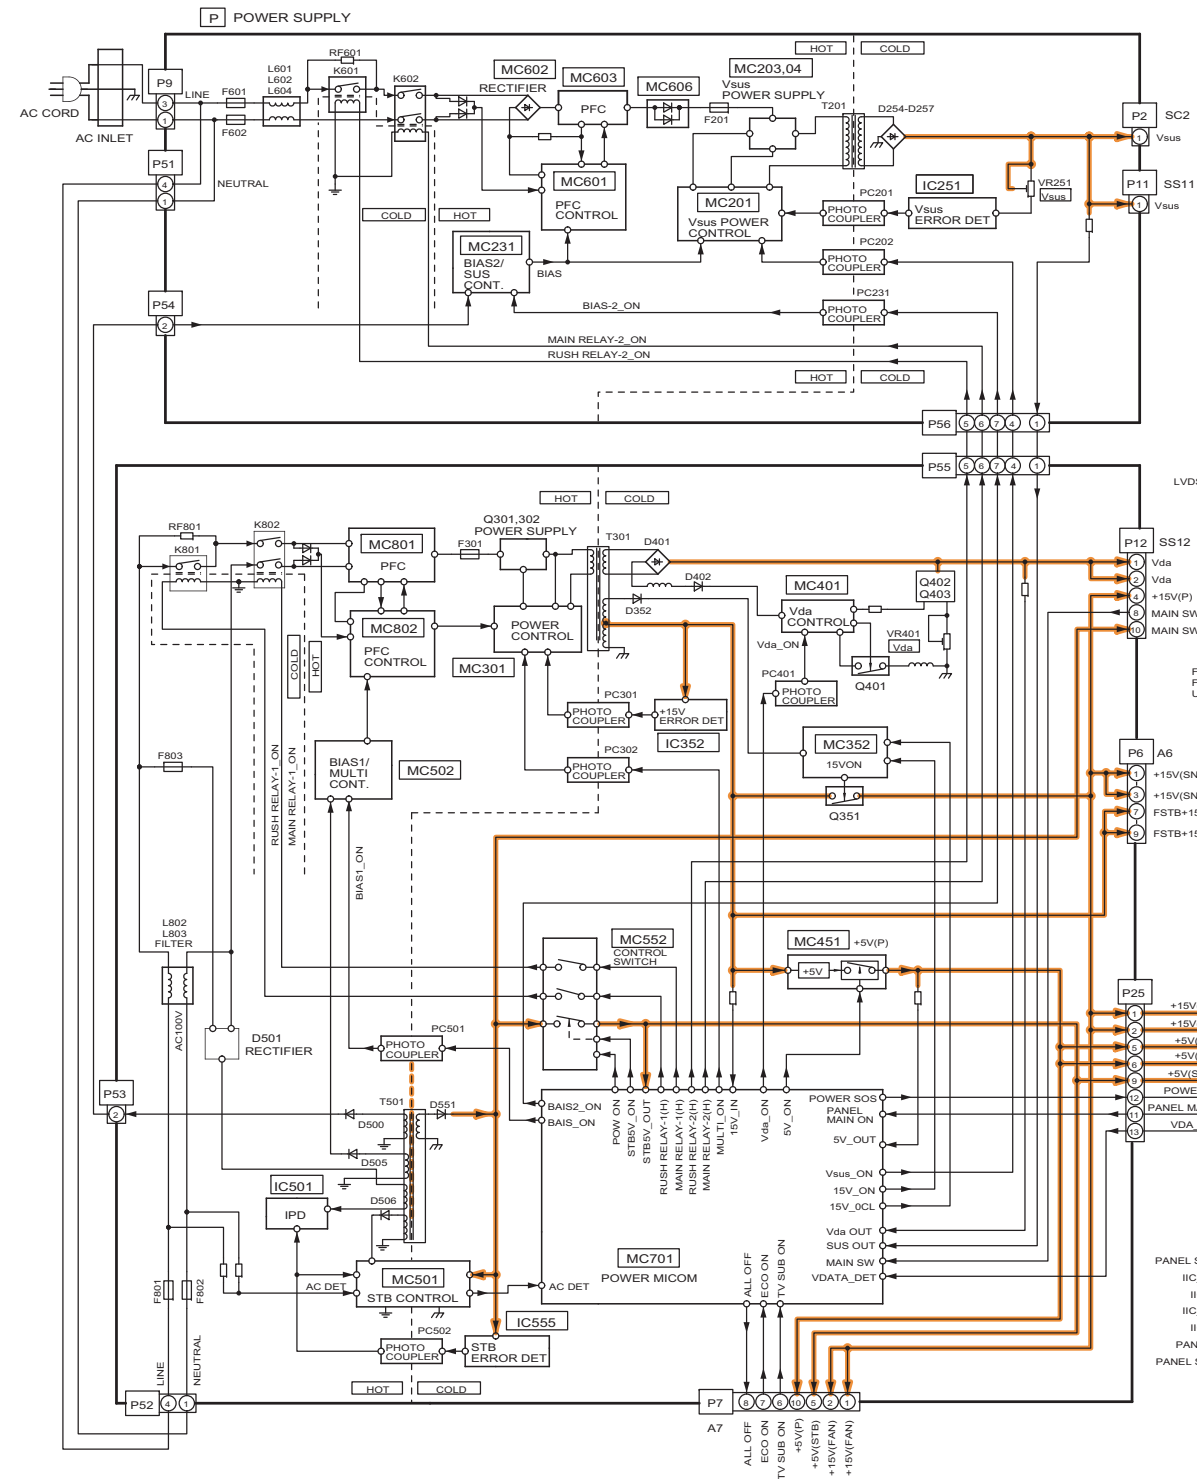


TH-65PZ850U
Block (5/7) Diagram

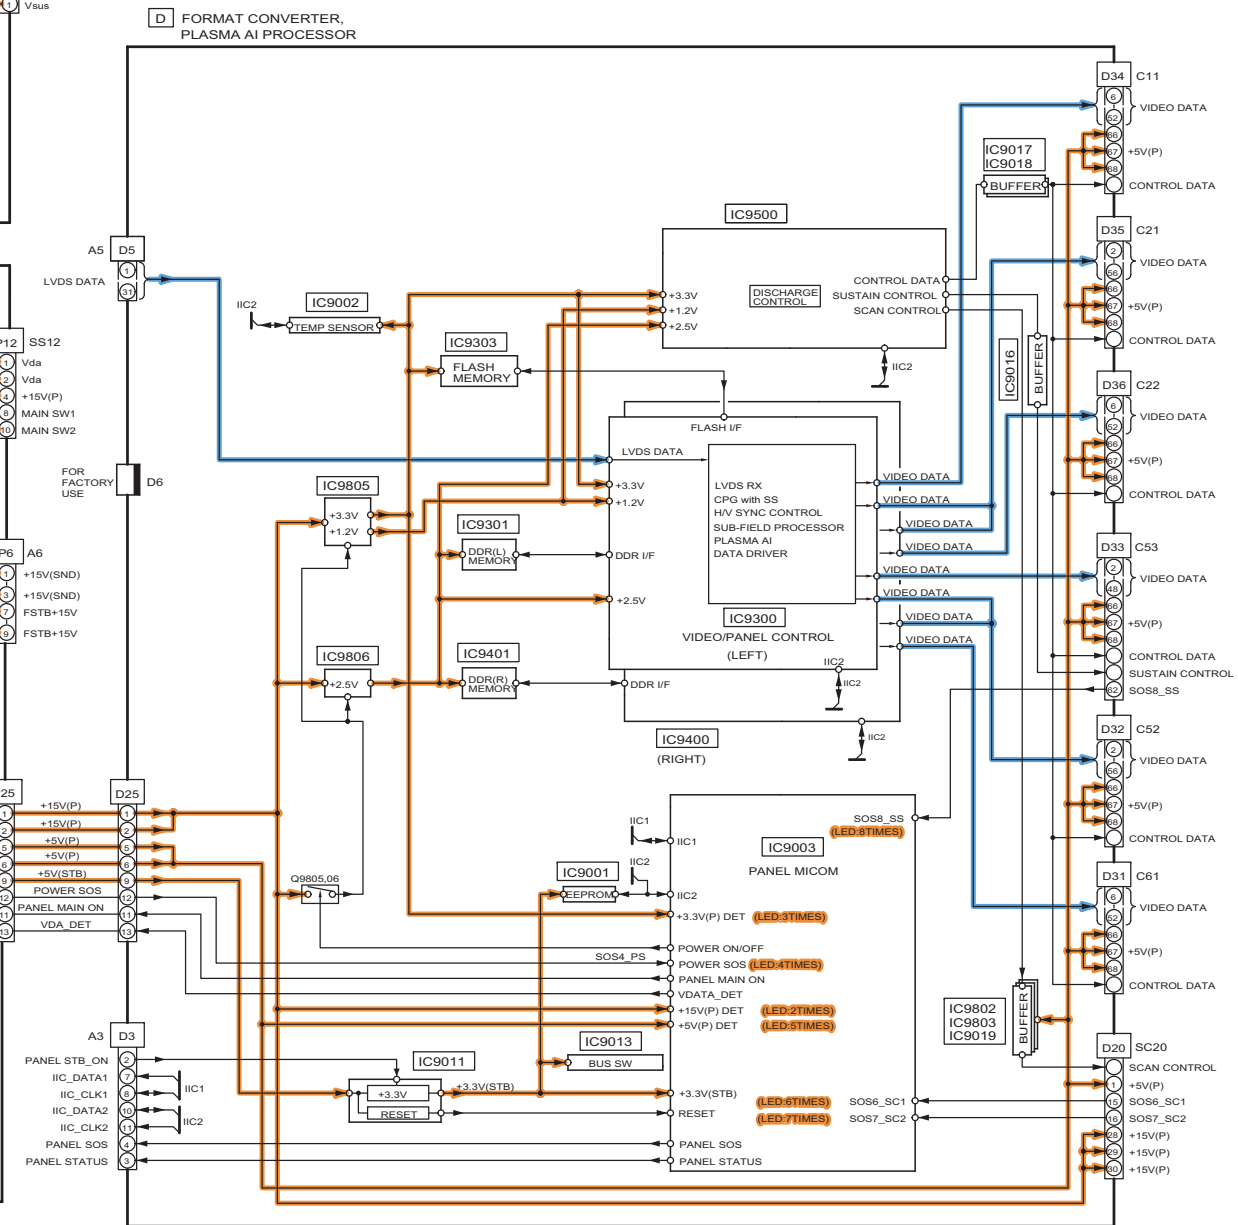


TH-65PZ850U
Block (5/7) Diagram

9.6. Block Diagram (6/7)

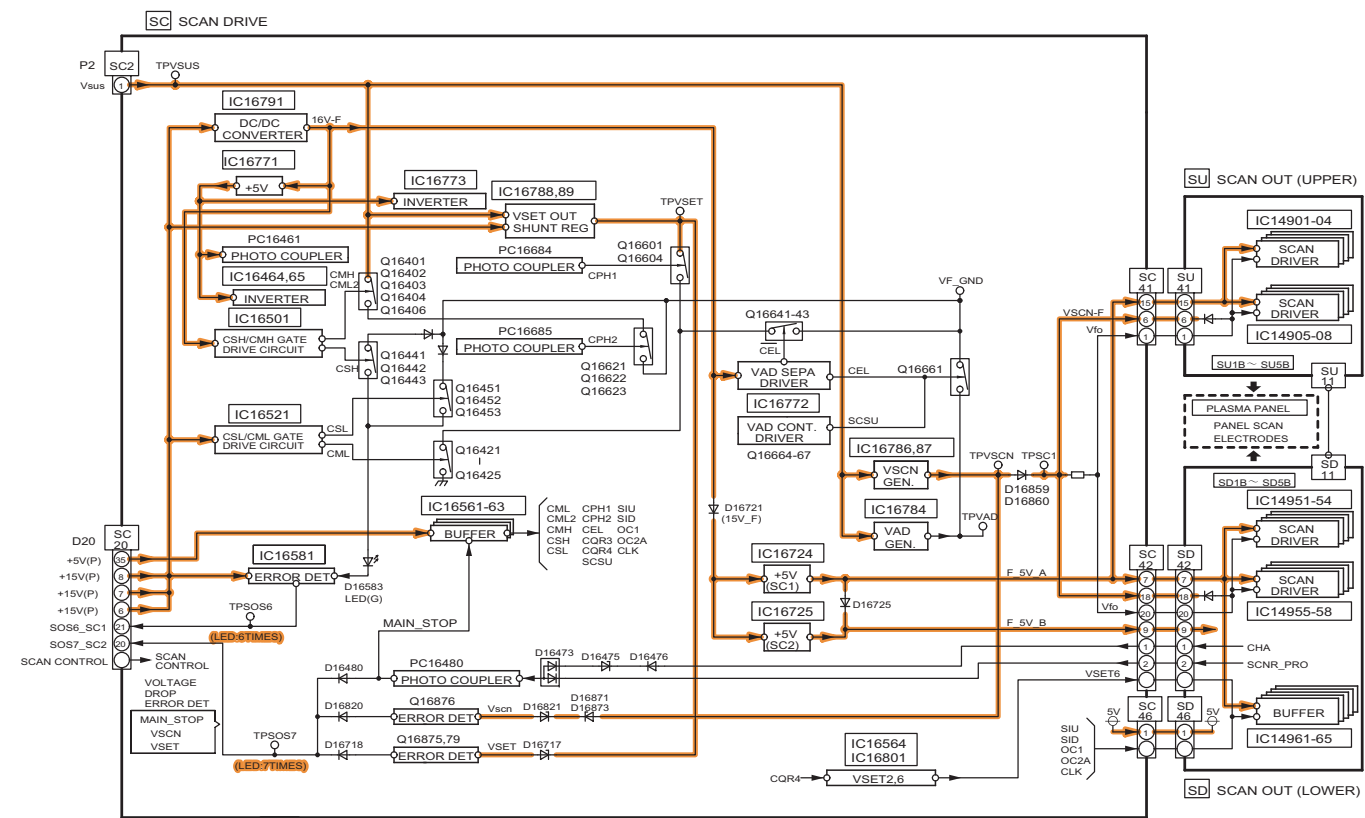


TH-65PZ850U
Block (6/7) Diagram

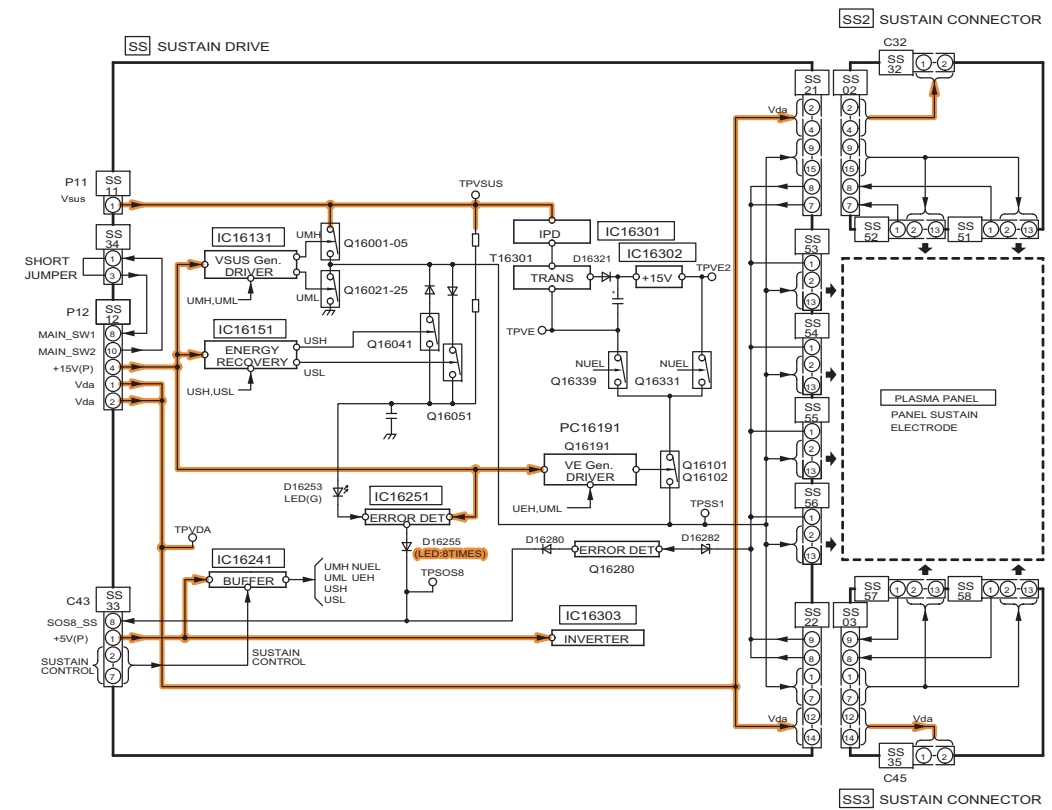

TH-65PZ850U
Block (6/7) Diagram

TH-65PZ850U
Block (7/7) Diagram



10 Wiring Connection Diagram

10.1. Caution statement.


Caution:

Please confirm that all flexible cables are assembled correctly.

Also make sure that they are locked in the connectors.

Verify by giving the flexible cables a very slight pull.


10.2. Wiring (1)-1

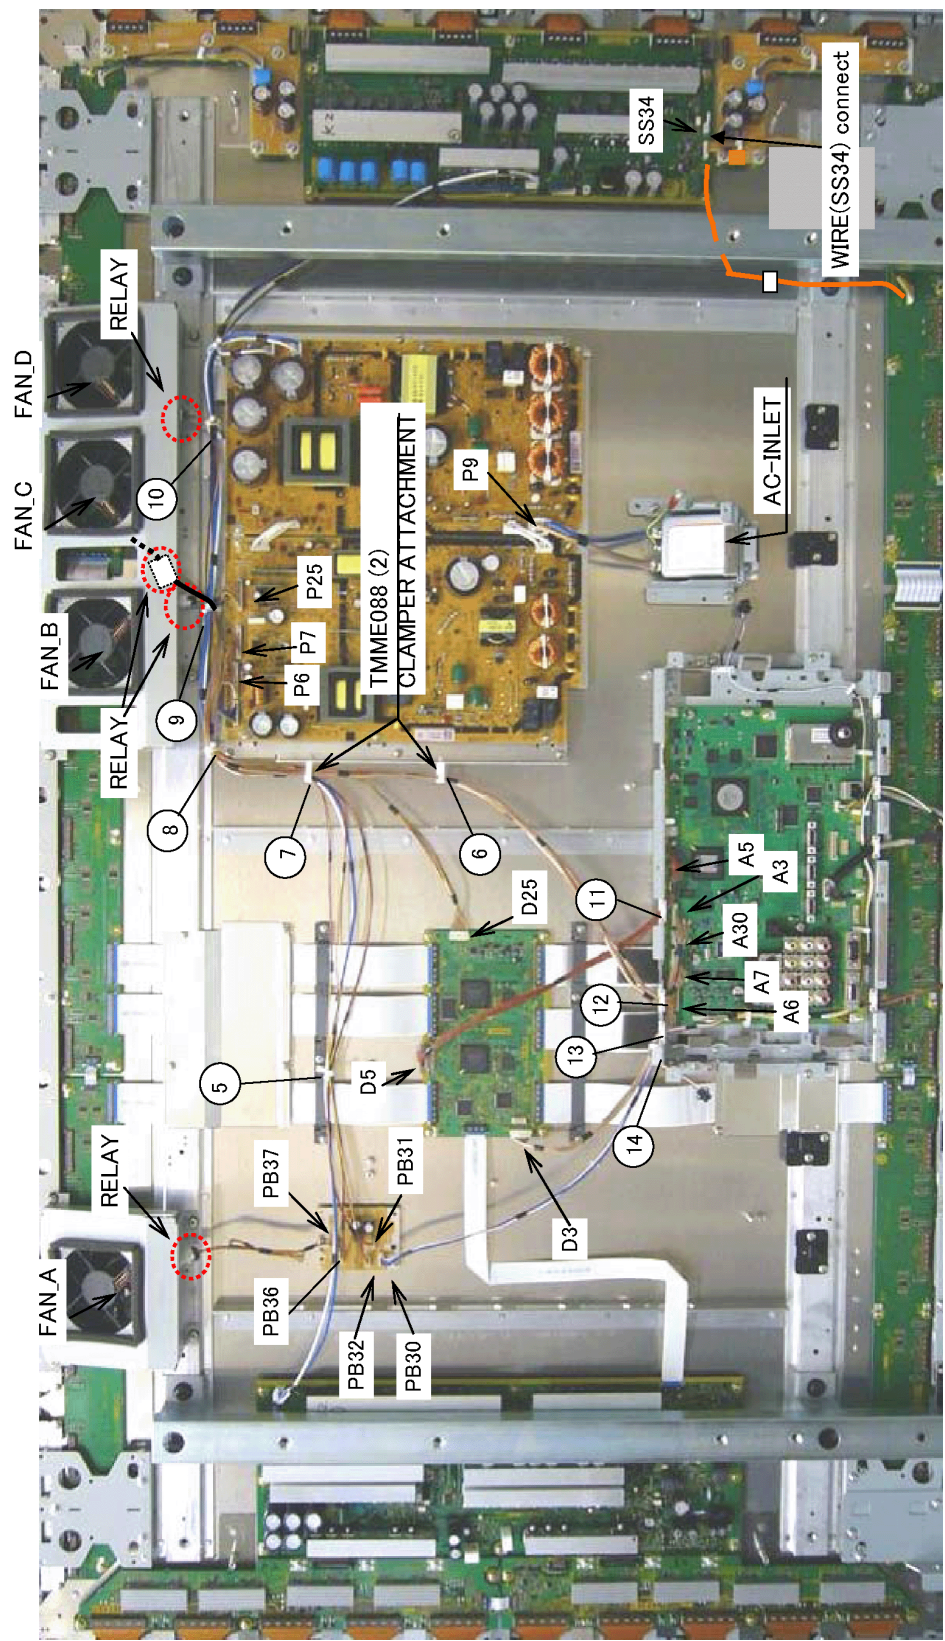

10.3. Wiring (1)-2

NAME/No. of CONNECTOR			CLAMPER No.													
			5	6	7	8	9	10	11	12	13	14	22			
D3	-	A3									○	○				
D5	-	A5							○							
P6	-	A6		○	○	○				○						
P7	-	A7		○	○	○				○						
A30	-	PB30									○	○				
D25	-	P25			○	○	○									
SS34	-															
AC-INLET	-	P9														
FAN_A	-	RELAY														
PB37	-															
FAN_B	-	RELAY														
PB32	-		○	○	○	○	○									
FAN_C	-	RELAY														
PB31	-		○	○	○	○	○									
FAN_D	-	RELAY														
PB36	-		○	○	○	○	○	○	○							


10.4. Wiring (2)-1

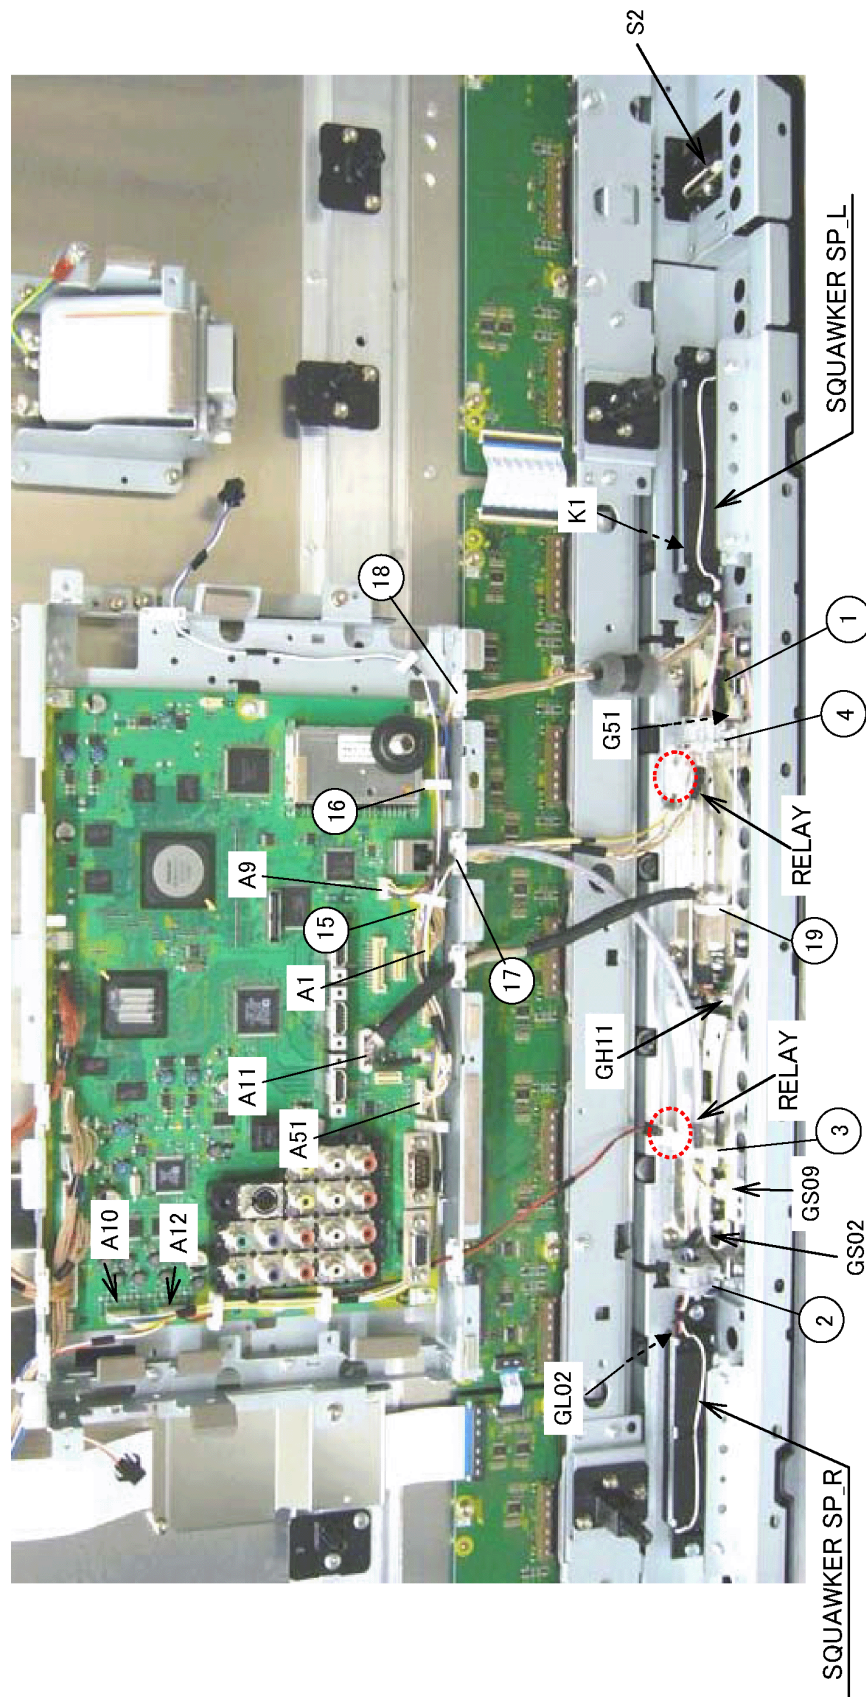

10.5. Wiring (2)-2


NAME/No. of CONNECTOR			GLAMPER No.															
			1	2	3	4	15	16	17	18	19							
A51	-	G51	○			○	○	○		○								
GL02	-	GS02		○														
A9	-	GS09			○													
K1	-	A1						○	○		○							
		S2																
A11	-	GH11															○	
SQUAWKER SP_R	-	RELAY		○	○													
A12	-																	
SQUAWKER SP_L	-						○											
A10	-	RELAY										○	○			○	○	

10.6. Wiring (3)

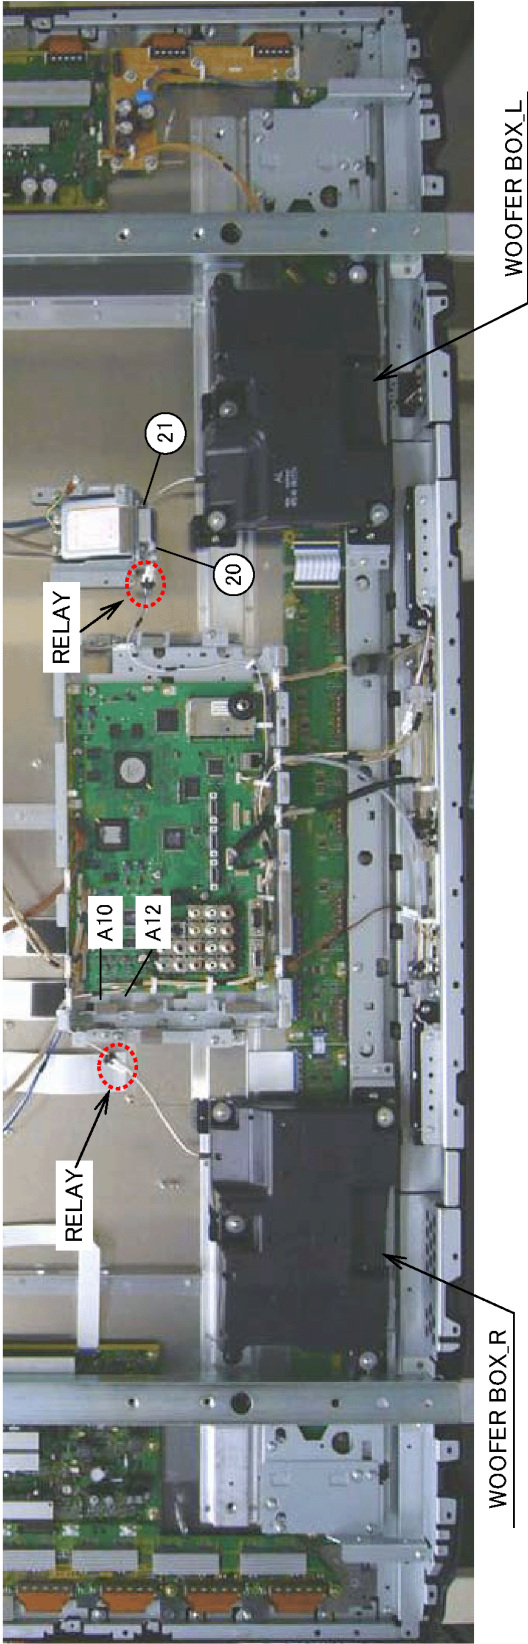

NAME/No. of CONNECTOR		CLAMPER No.									
		20	21								
WOOFER_L	-										
A10	-										
WOOFER_R	-										
A12	-										

10.7. Wiring (4)

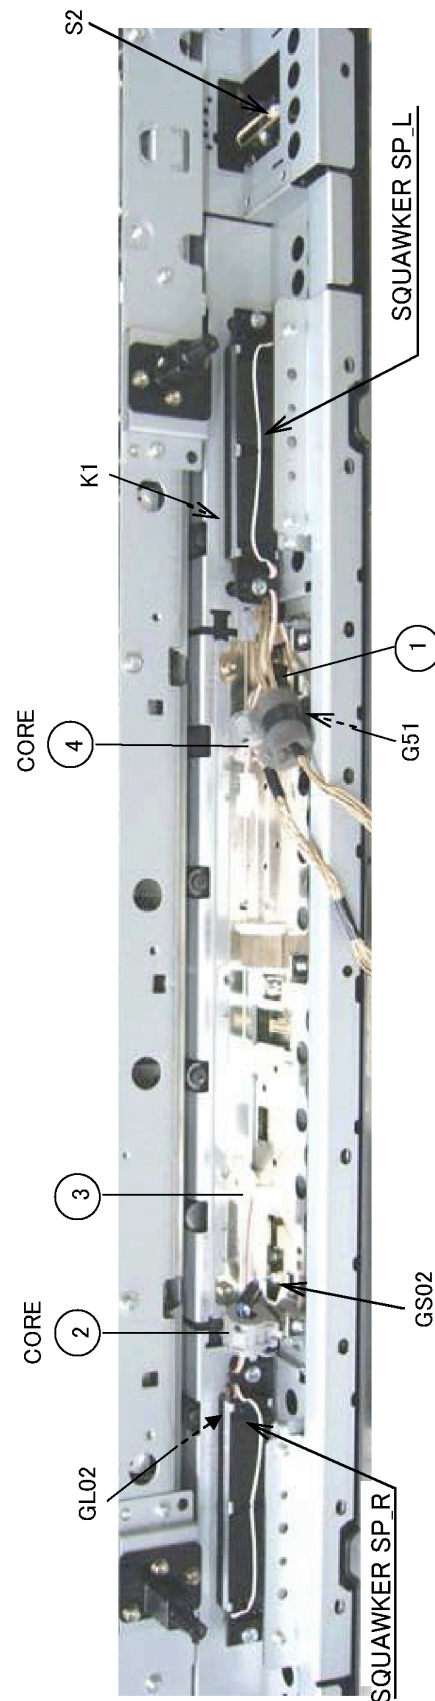

NAME/No. of CONNECTOR		CLAMPER No.			
		1	2	3	4
A51	—	G51			
GL02	—	GS02			
K1	—	A1			
		S2			
SQUAWKER SP_R	—	RELAY			
SQUAWKER SP_L	—	RELAY			


11 Schematic Diagram

11.1. Schematic Diagram Note


- Notes:**
- 1. **Resistor**
Unit of resistance is OHM [Ω] (K=1,000, M=1,000,000).
 - 2. **Capacitor**
Unit of capacitance is μ F, unless otherwise noted.
 - 3. Coil
Unit of inductance is H, unless otherwise noted.
 - 4. Test Point
 : Test Point position
 - 5. Earth Symbol
 : Chassis Earth (Cold)  : Line Earth (Hot)
 - 6. Voltage Measurement
Voltage is measured by a DC voltmeter.
Conditions of the measurement are the following:
Power Source AC120V, 60Hz
Receiving Signal Colour Bar signal (RF)
All customer's controls Maximum positions
 - 7. When arrow mark (↗) is found, connection is easily found from the direction of arrow.
 - 8. Indicates the major signal flow. : Video ➡ Audio ⇔
 - 9. This schematic diagram is the latest at the time of printing and subject to change without notice.

- Remarks:**
- 1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.
The circuit is defined by HOT and COLD indications in the schematic diagram. Take the following precautions.
All circuits, except the Power Circuit, are cold.
Precautions
 - a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
 - b. Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
 - c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
Connect the earth of instruments to the earth connection of the circuit being measured.
 - d. Make sure to disconnect the power plug before removing the chassis.


11.2. P(SUS)-Board Schematic Diagram

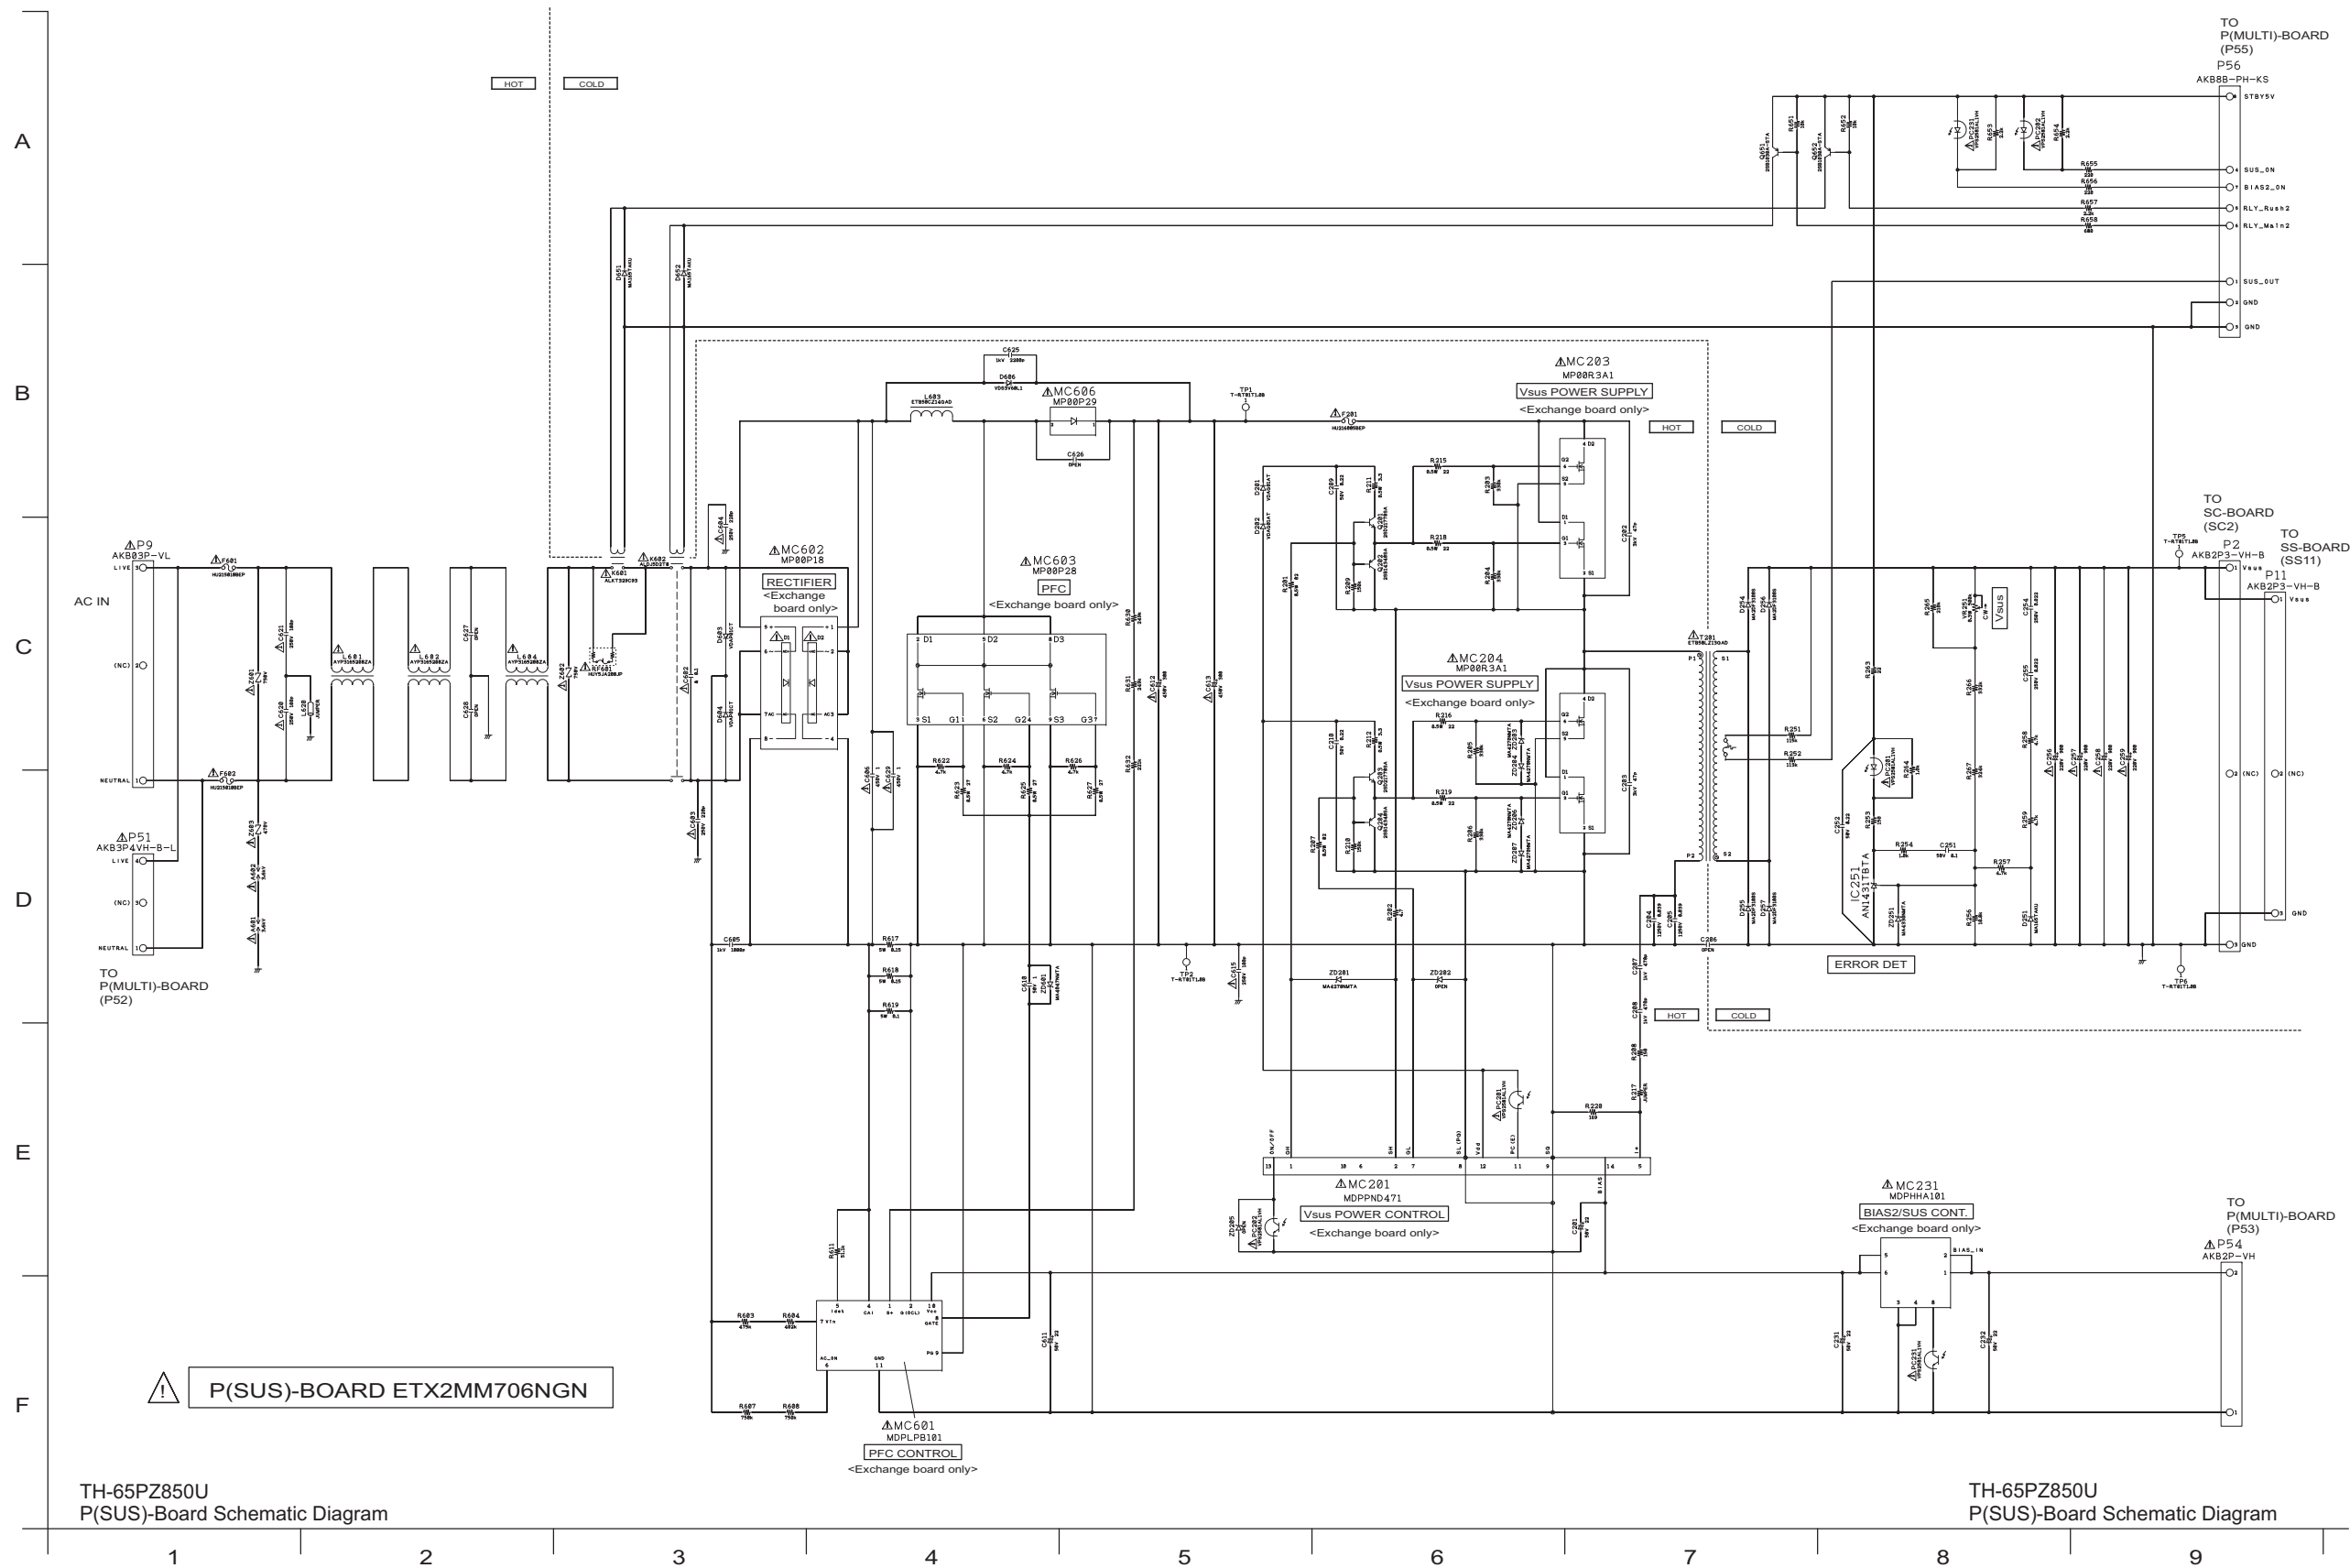


11.3. P(MULTI)-Board Schematic Diagram

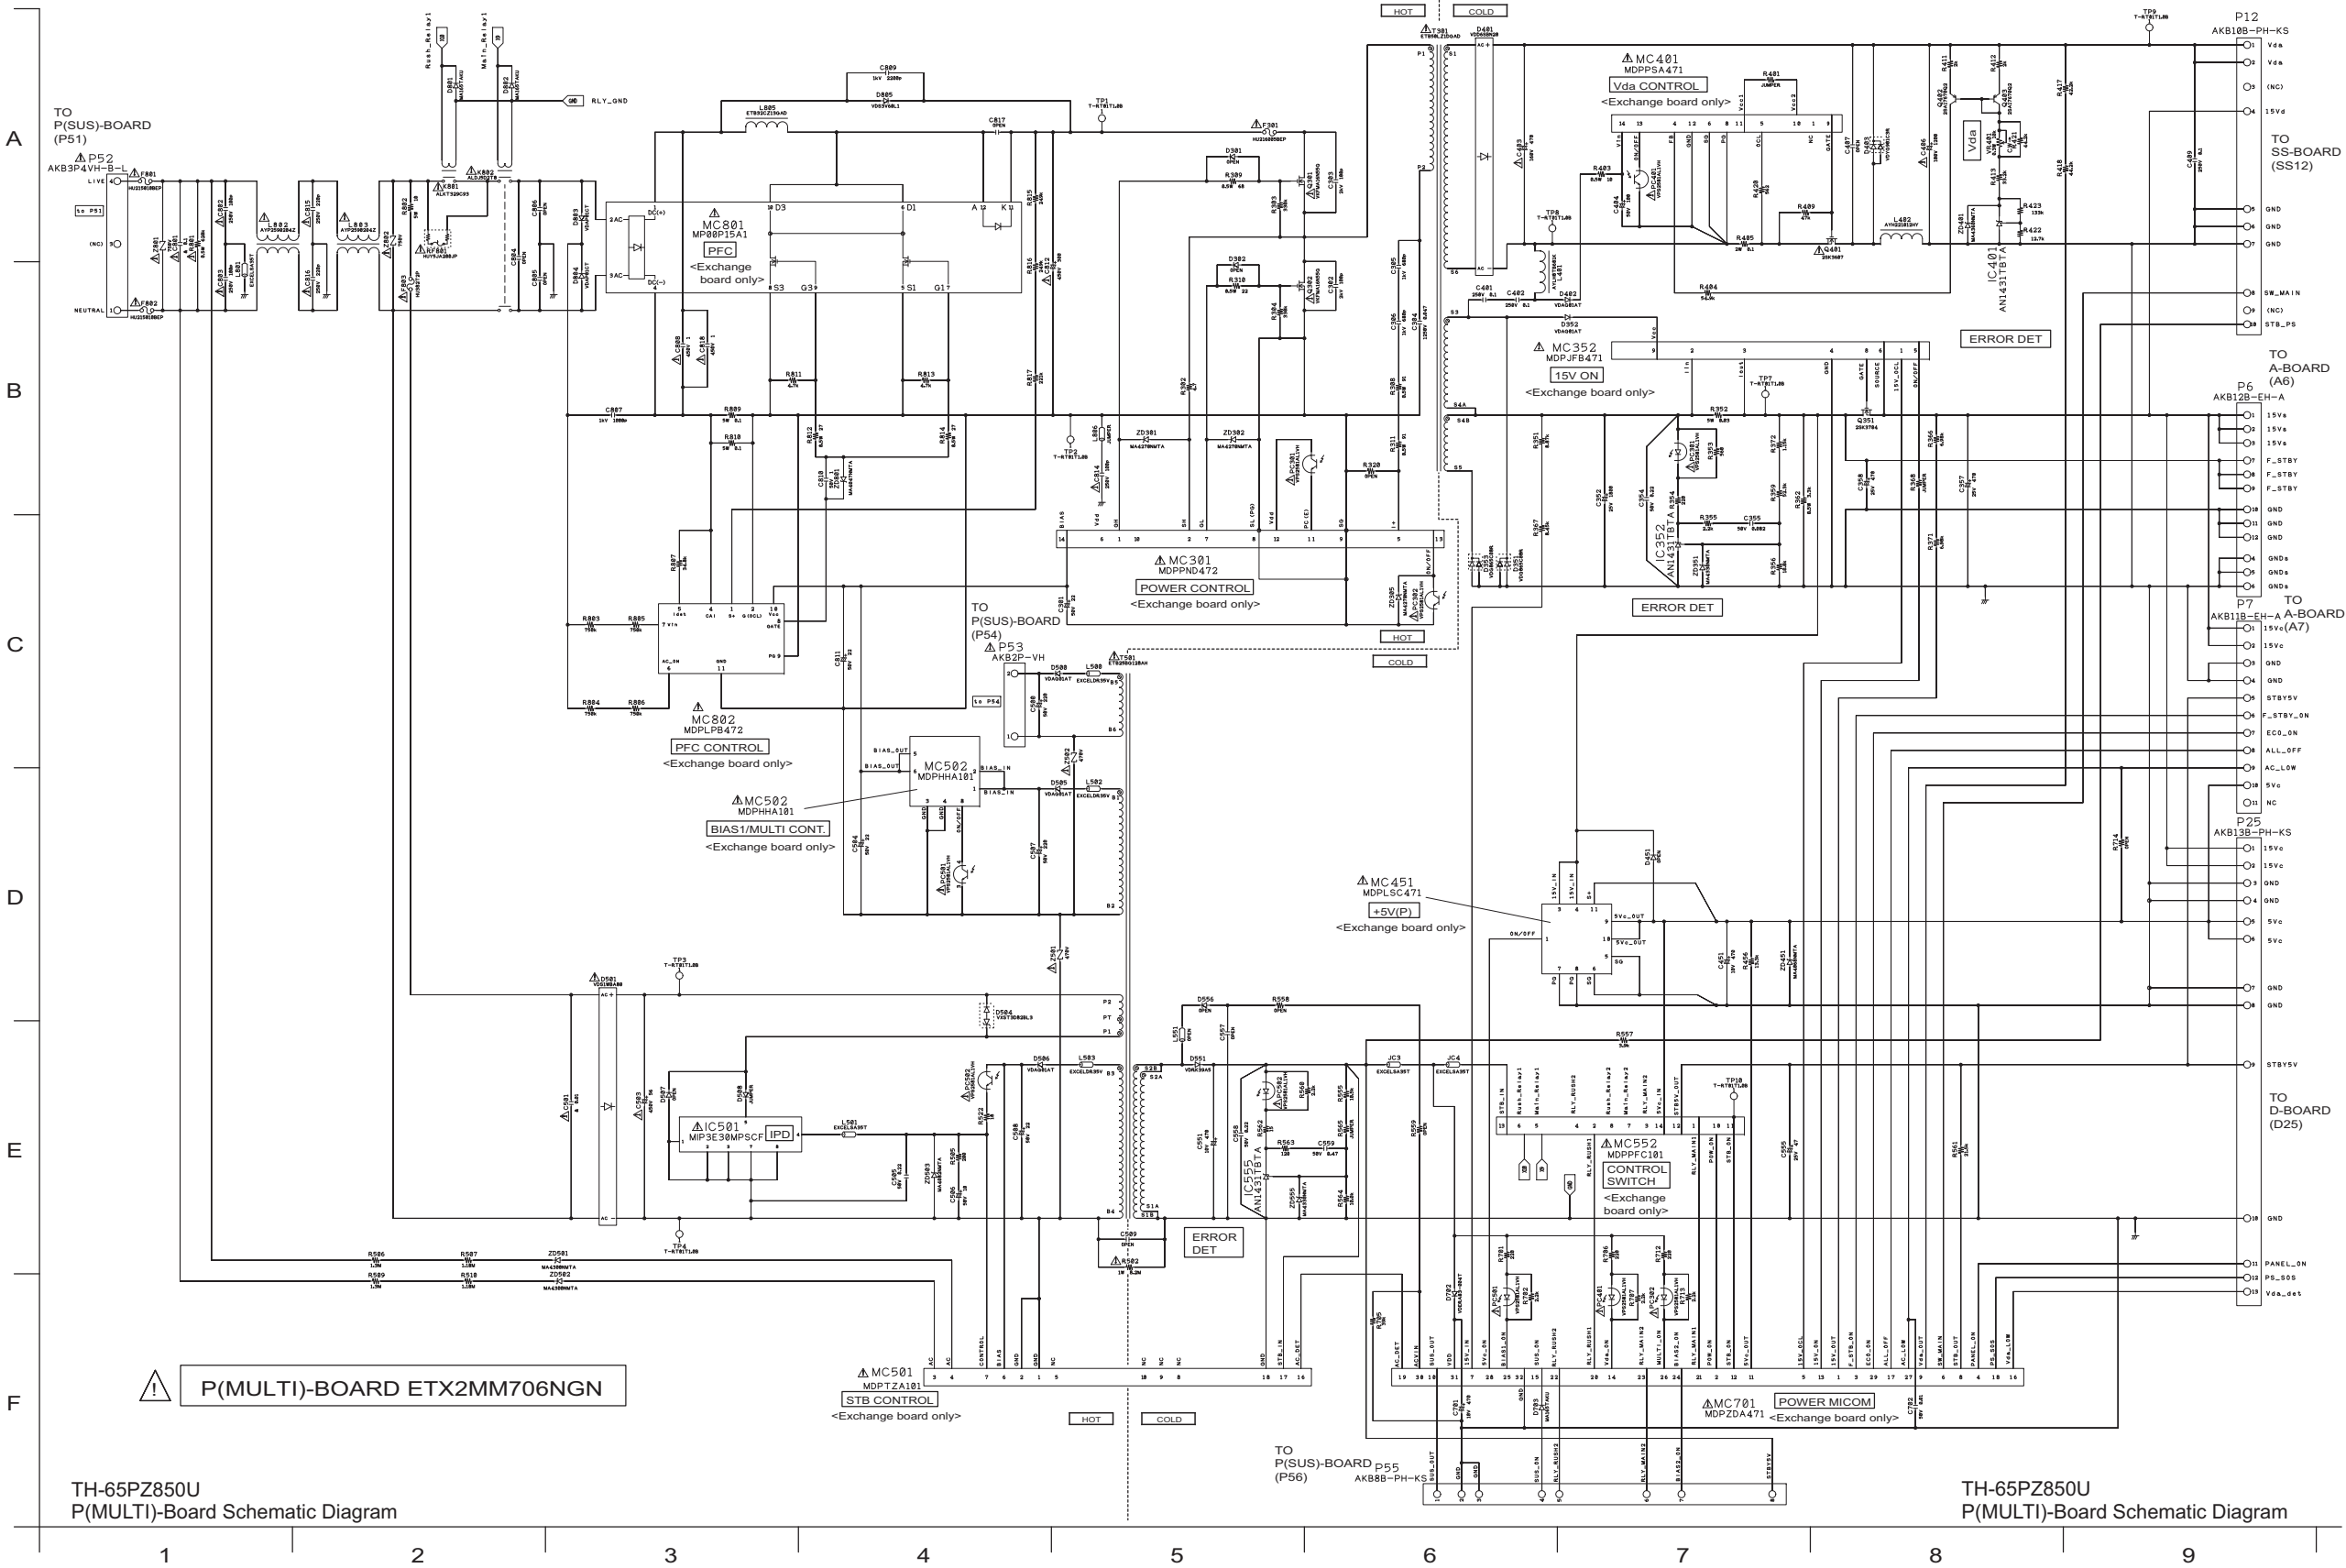


11.4. PB-Board Schematic Diagram

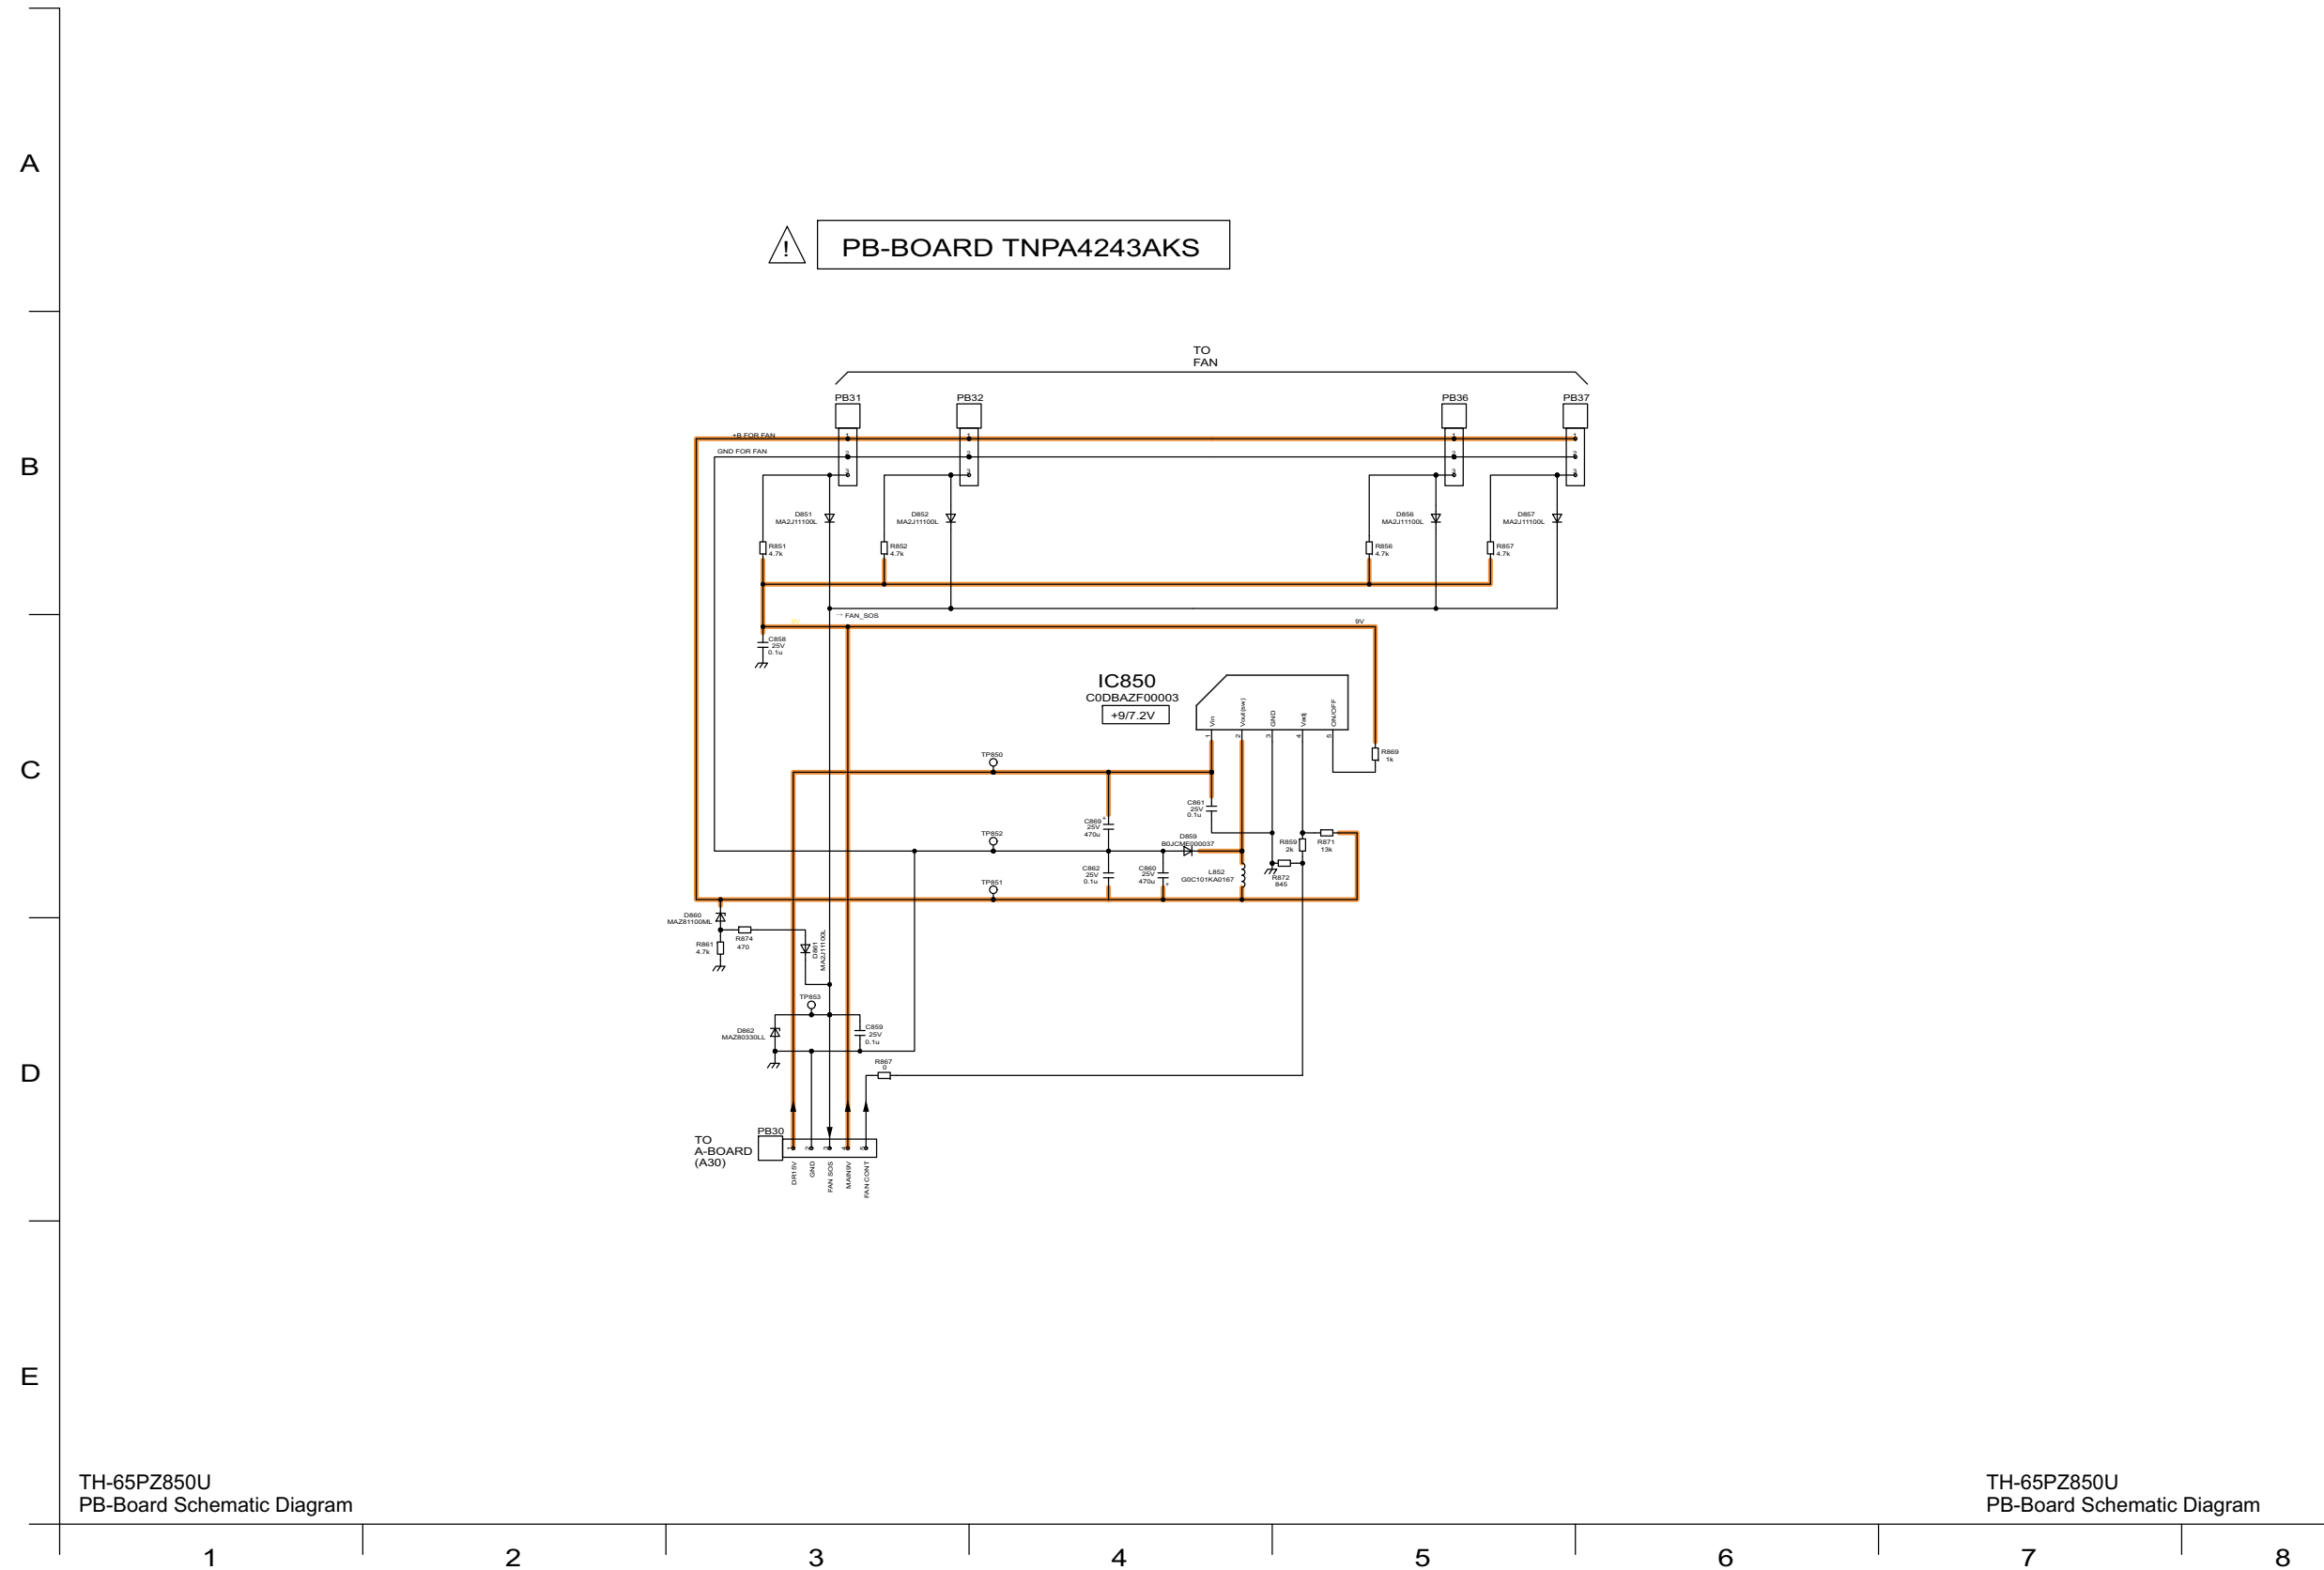


11.5. G, K and S-Board Schematic Diagram

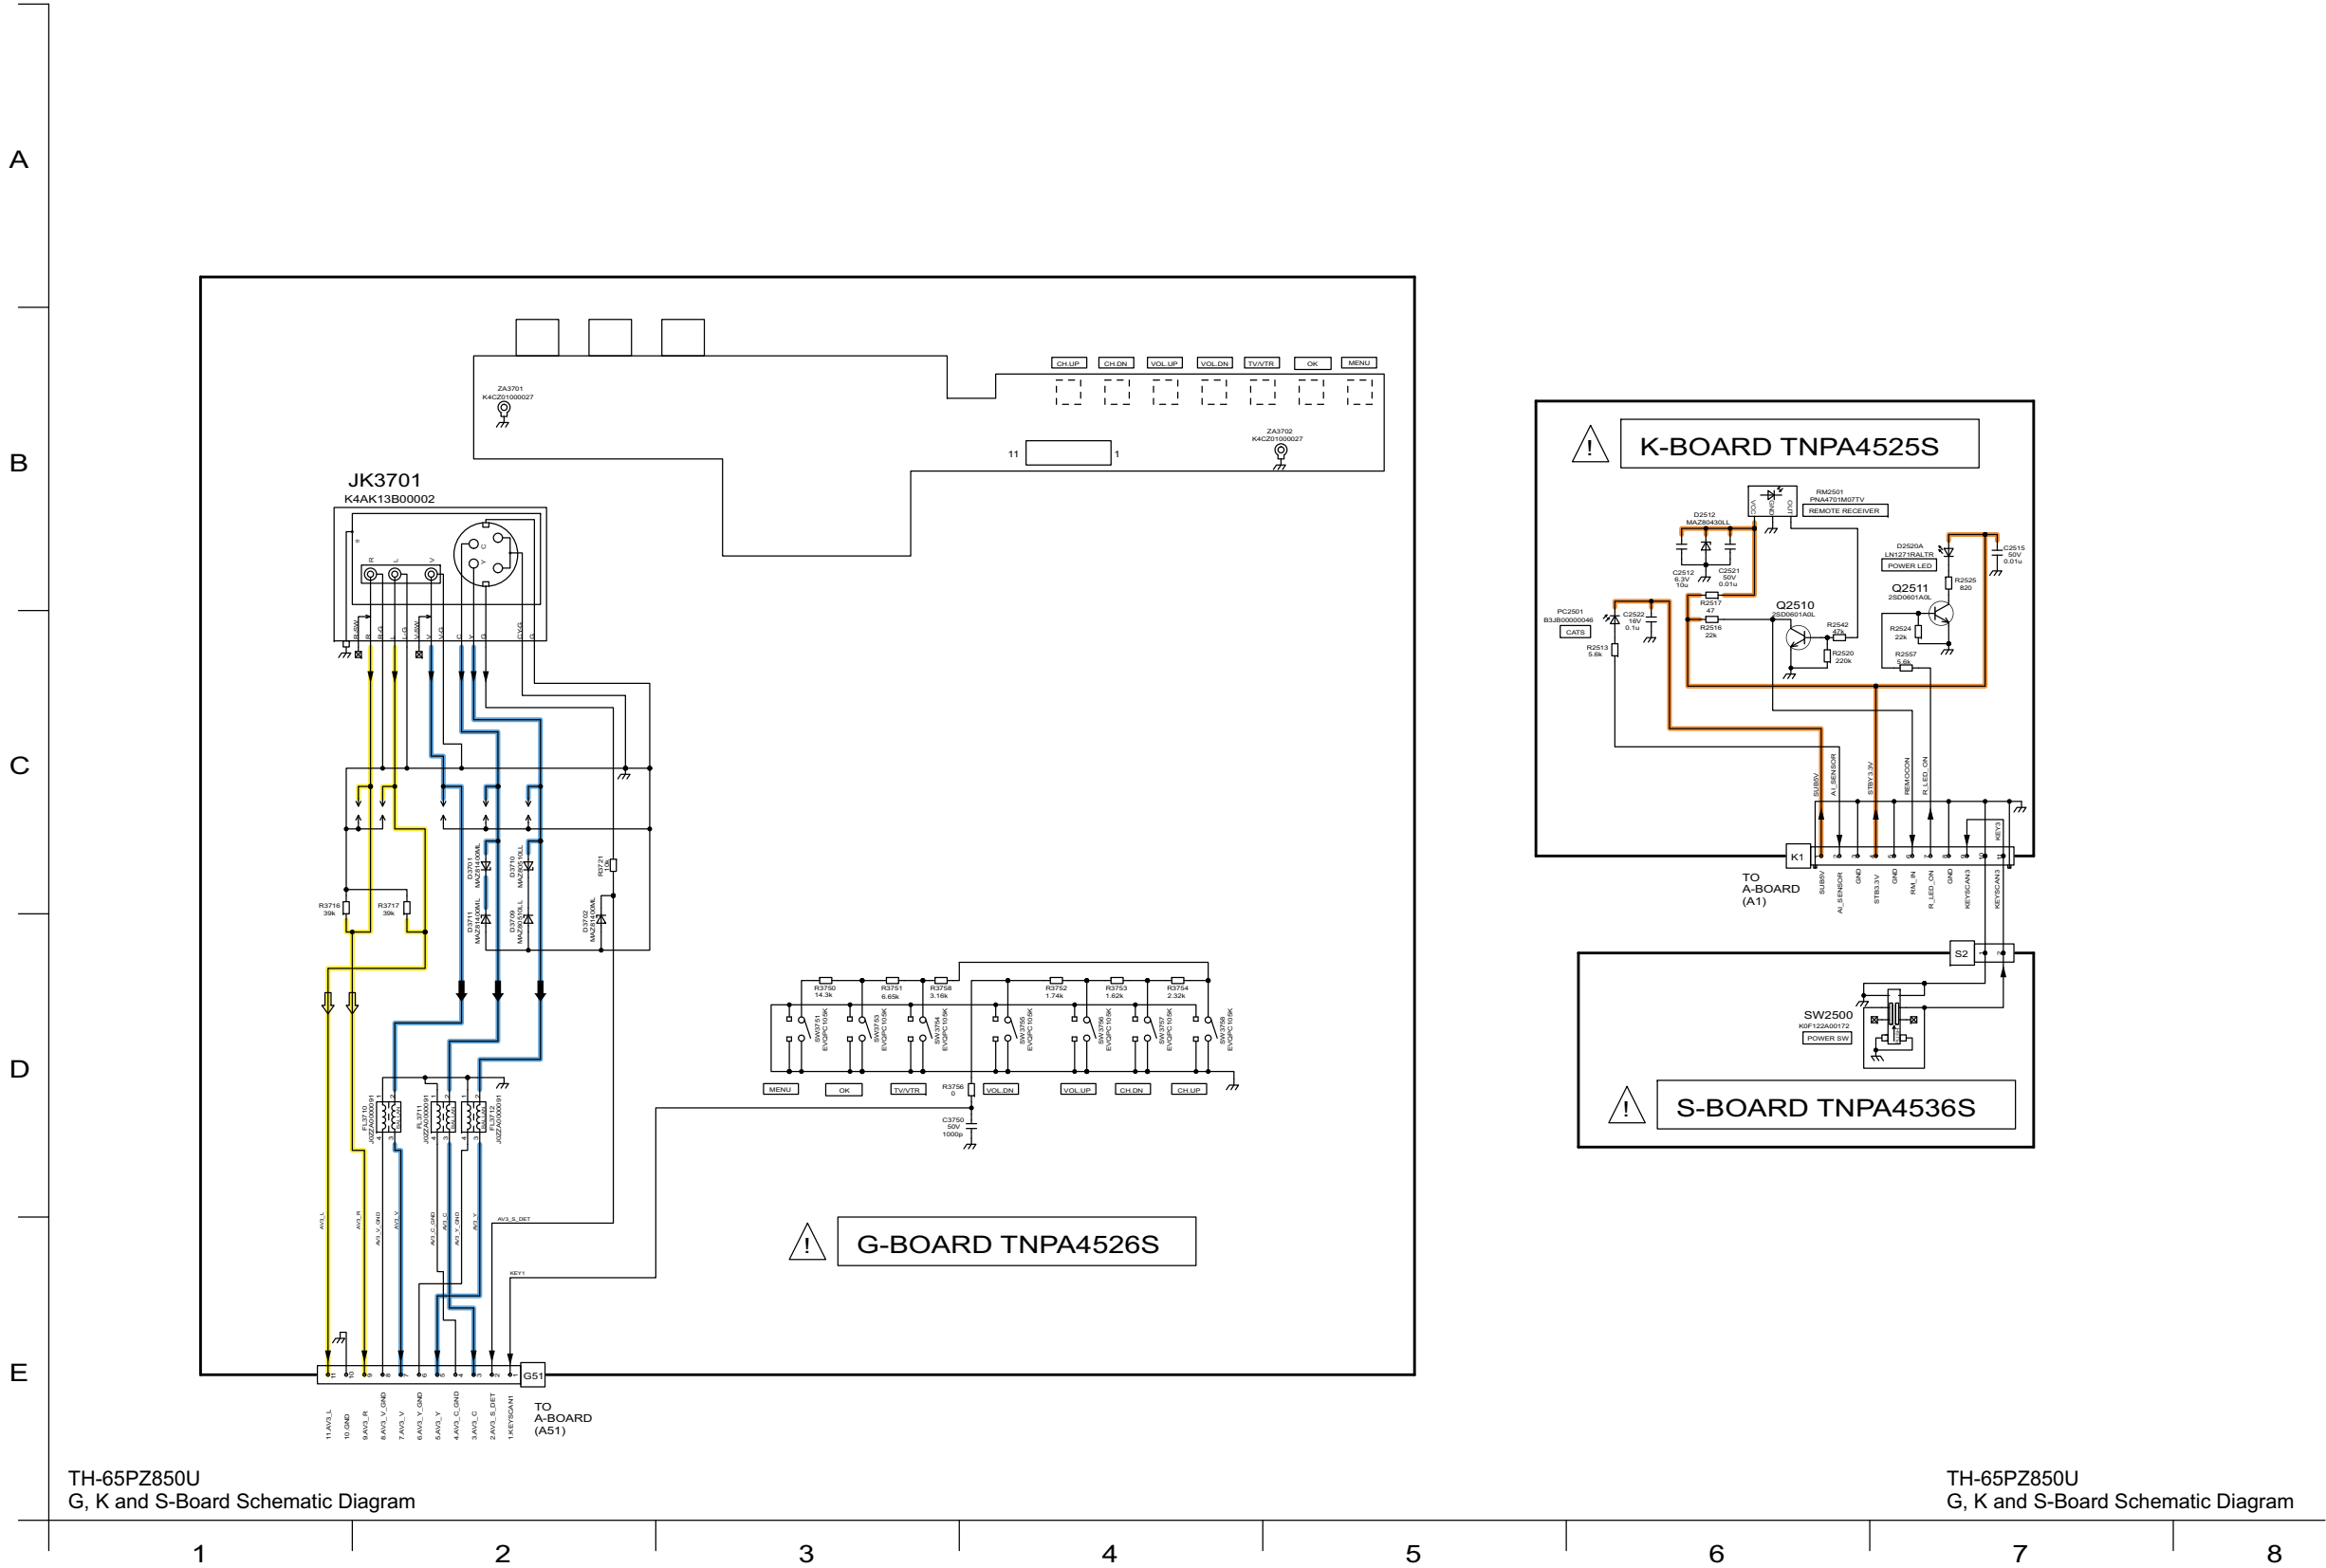

11.6. GS and GL-Board Schematic Diagram

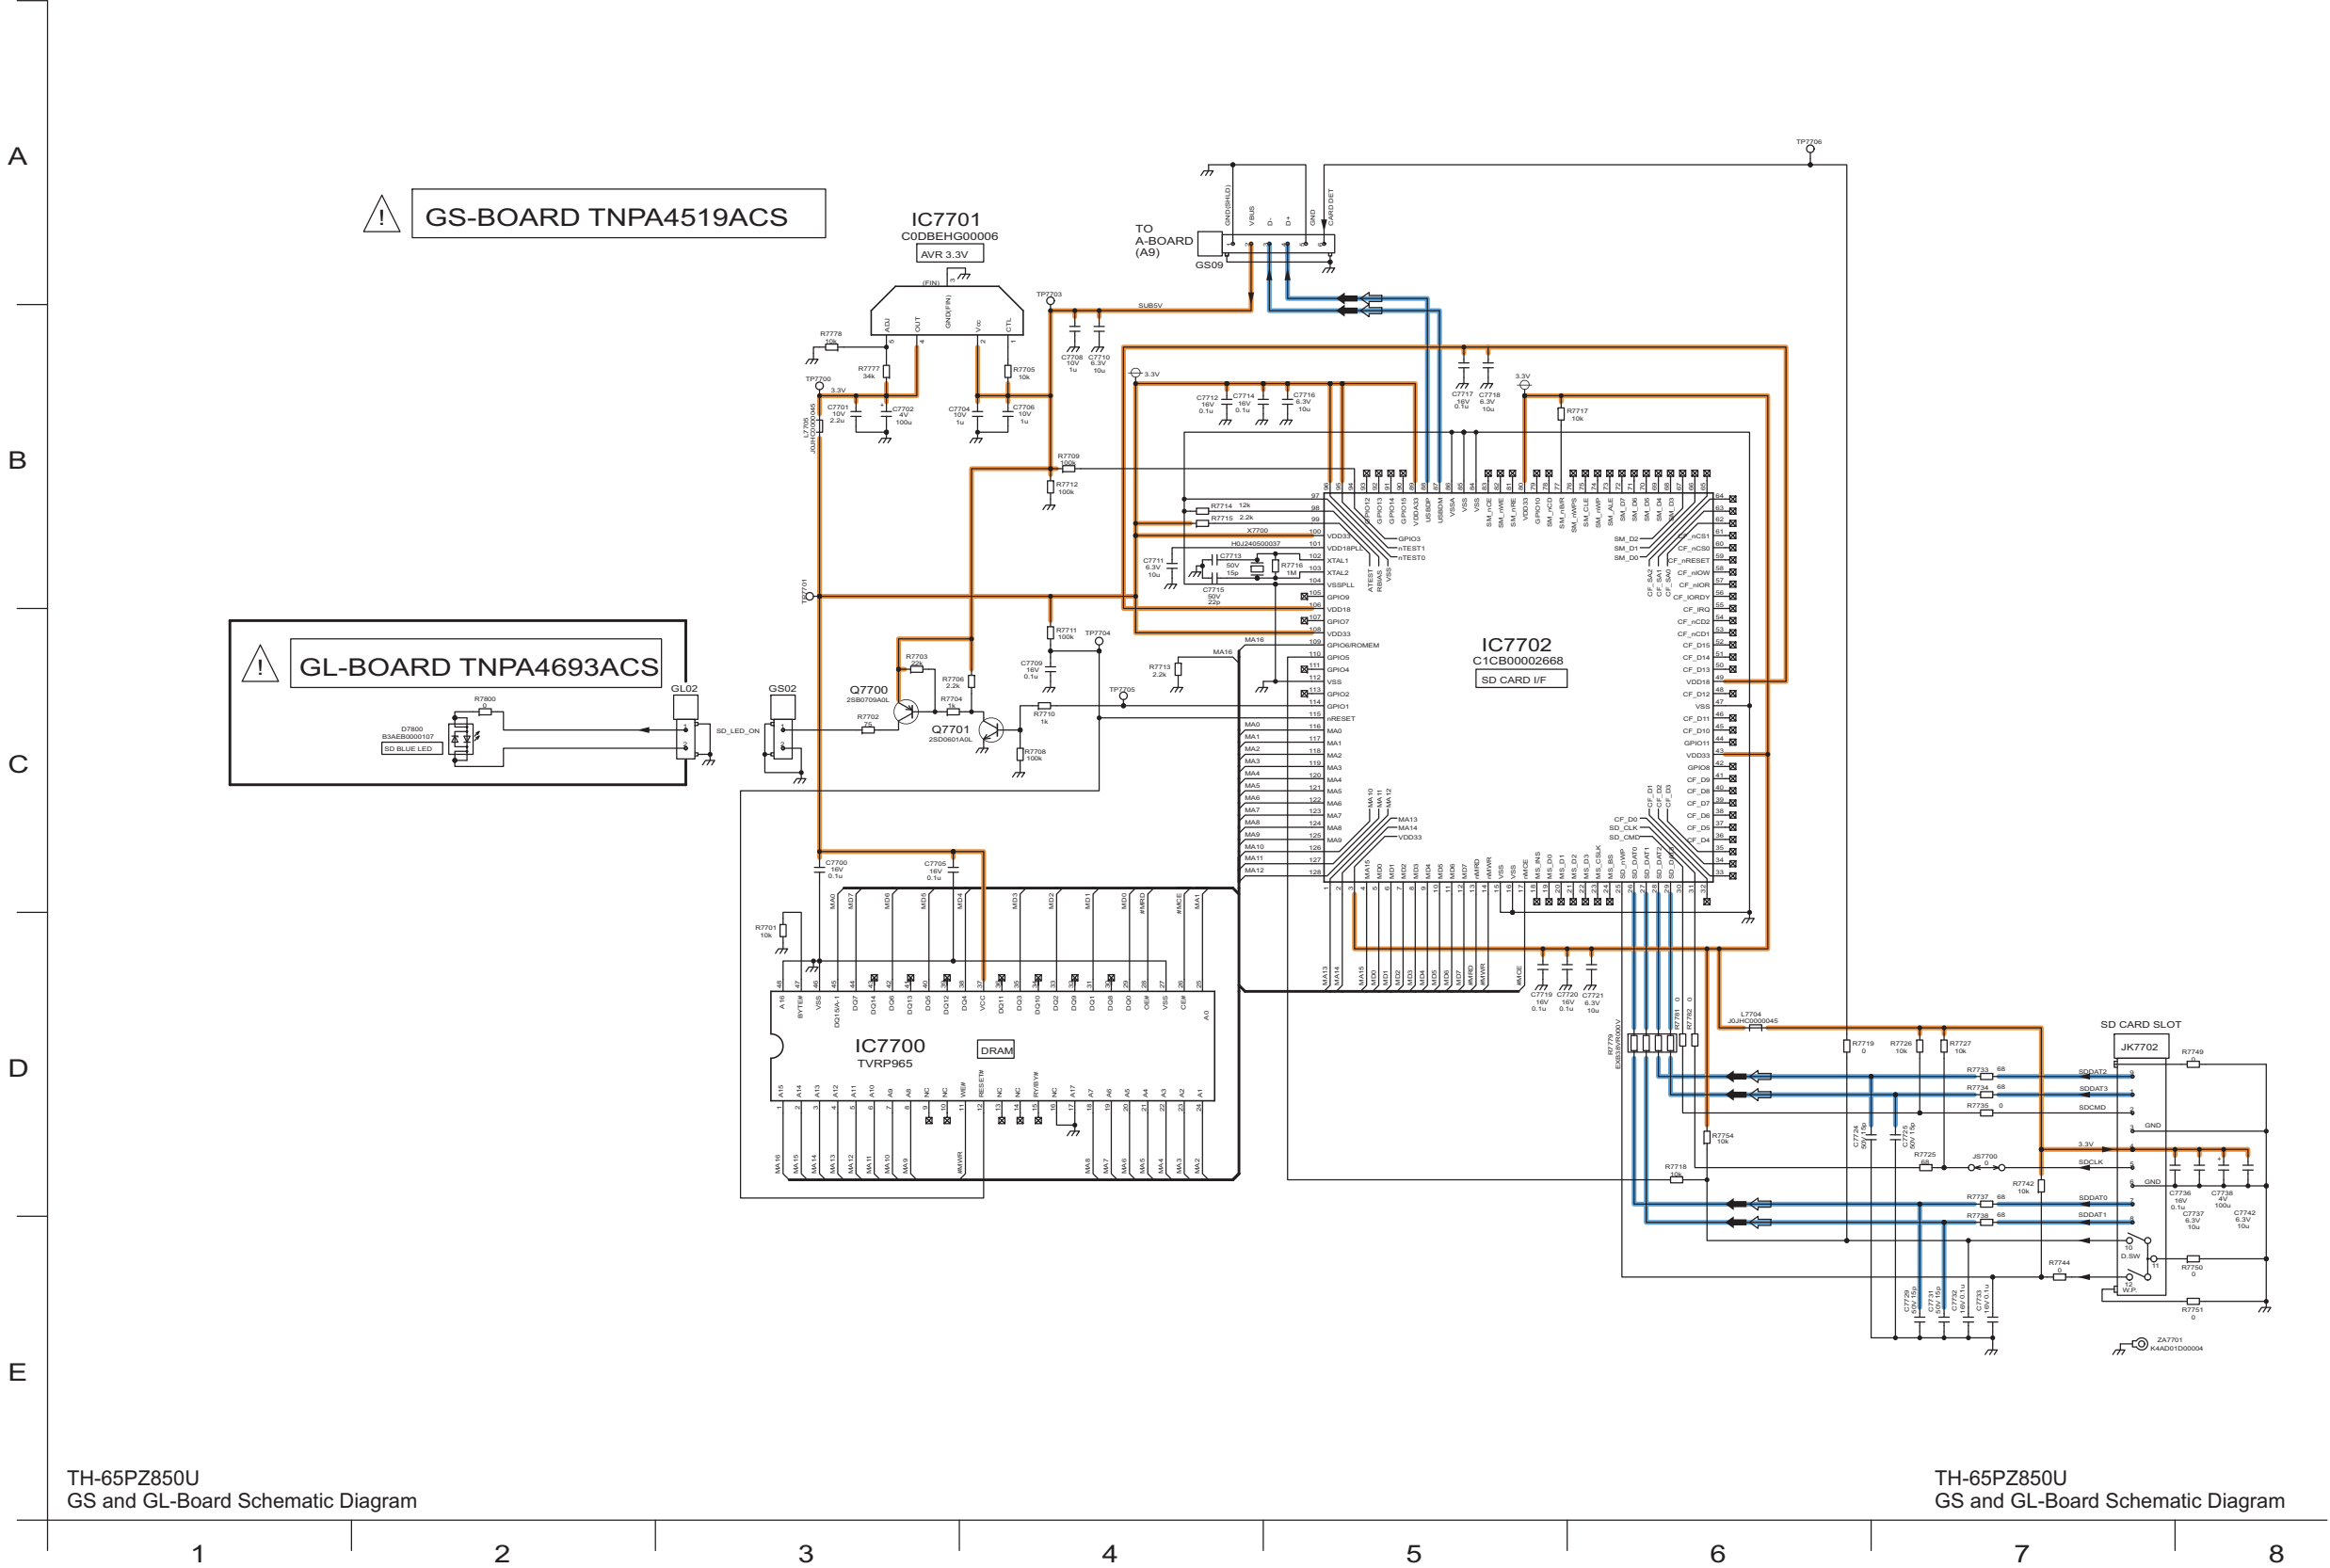


11.7. GH-Board Schematic Diagram

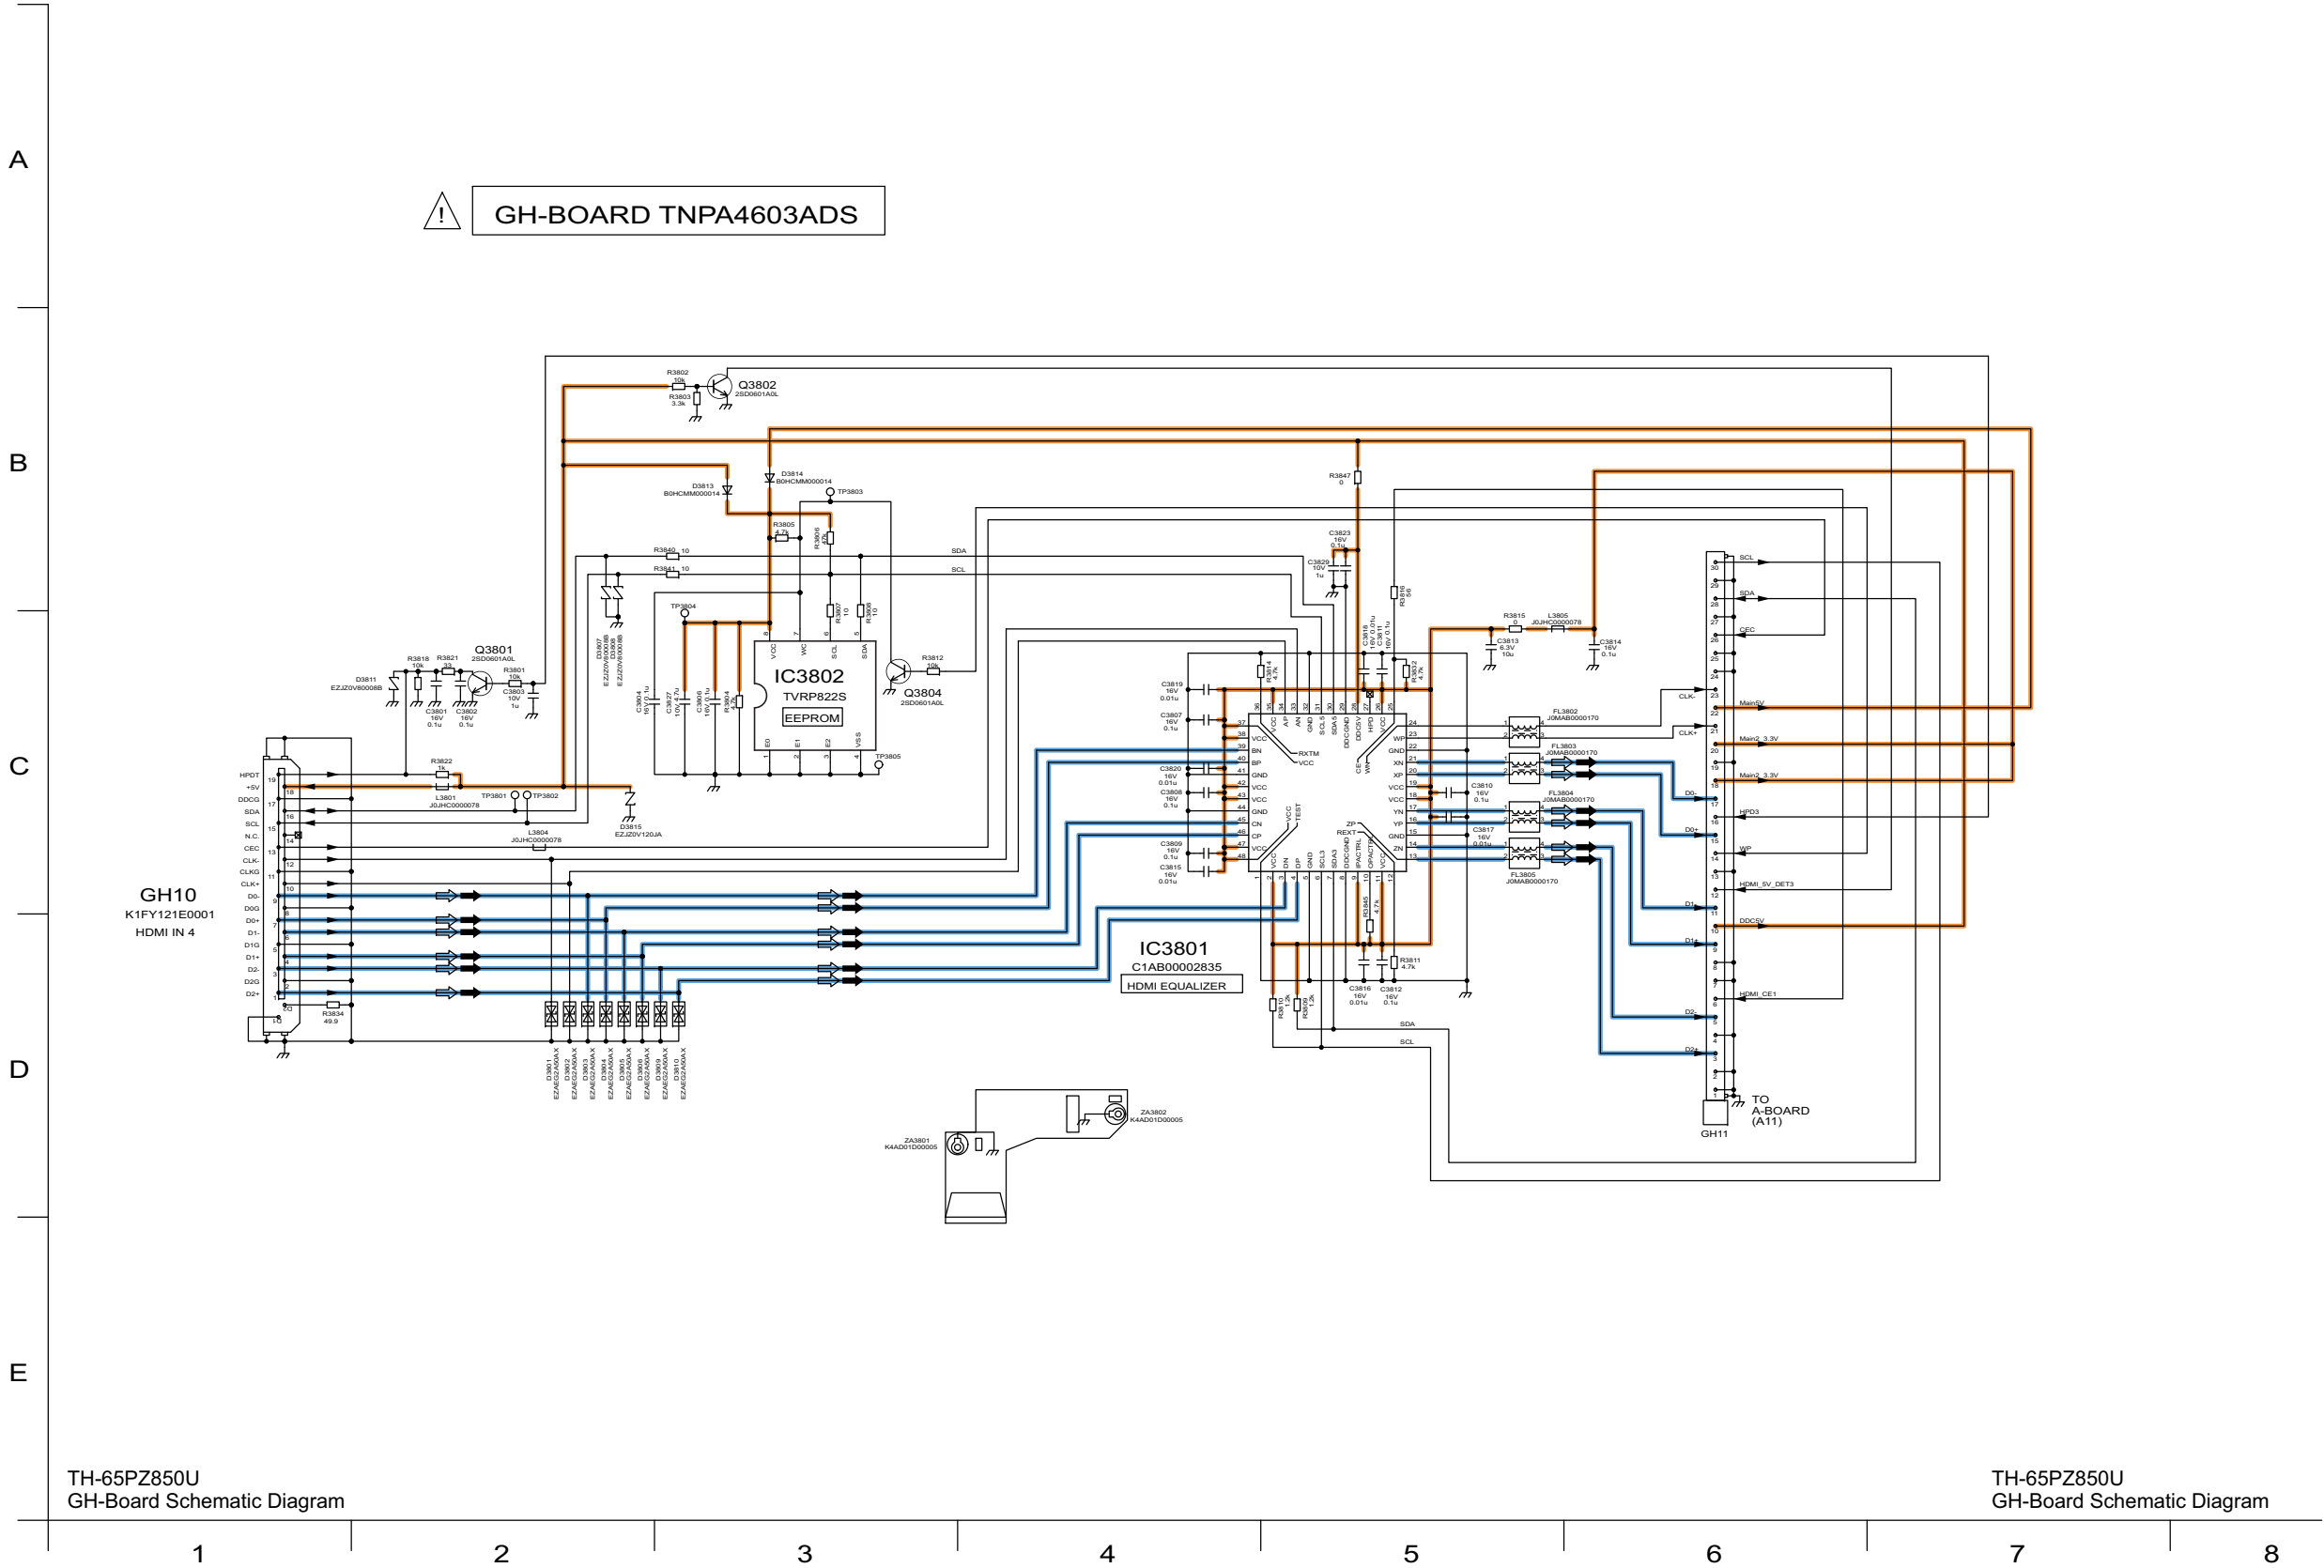

11.8. A-Board (1/15) Schematic Diagram

A

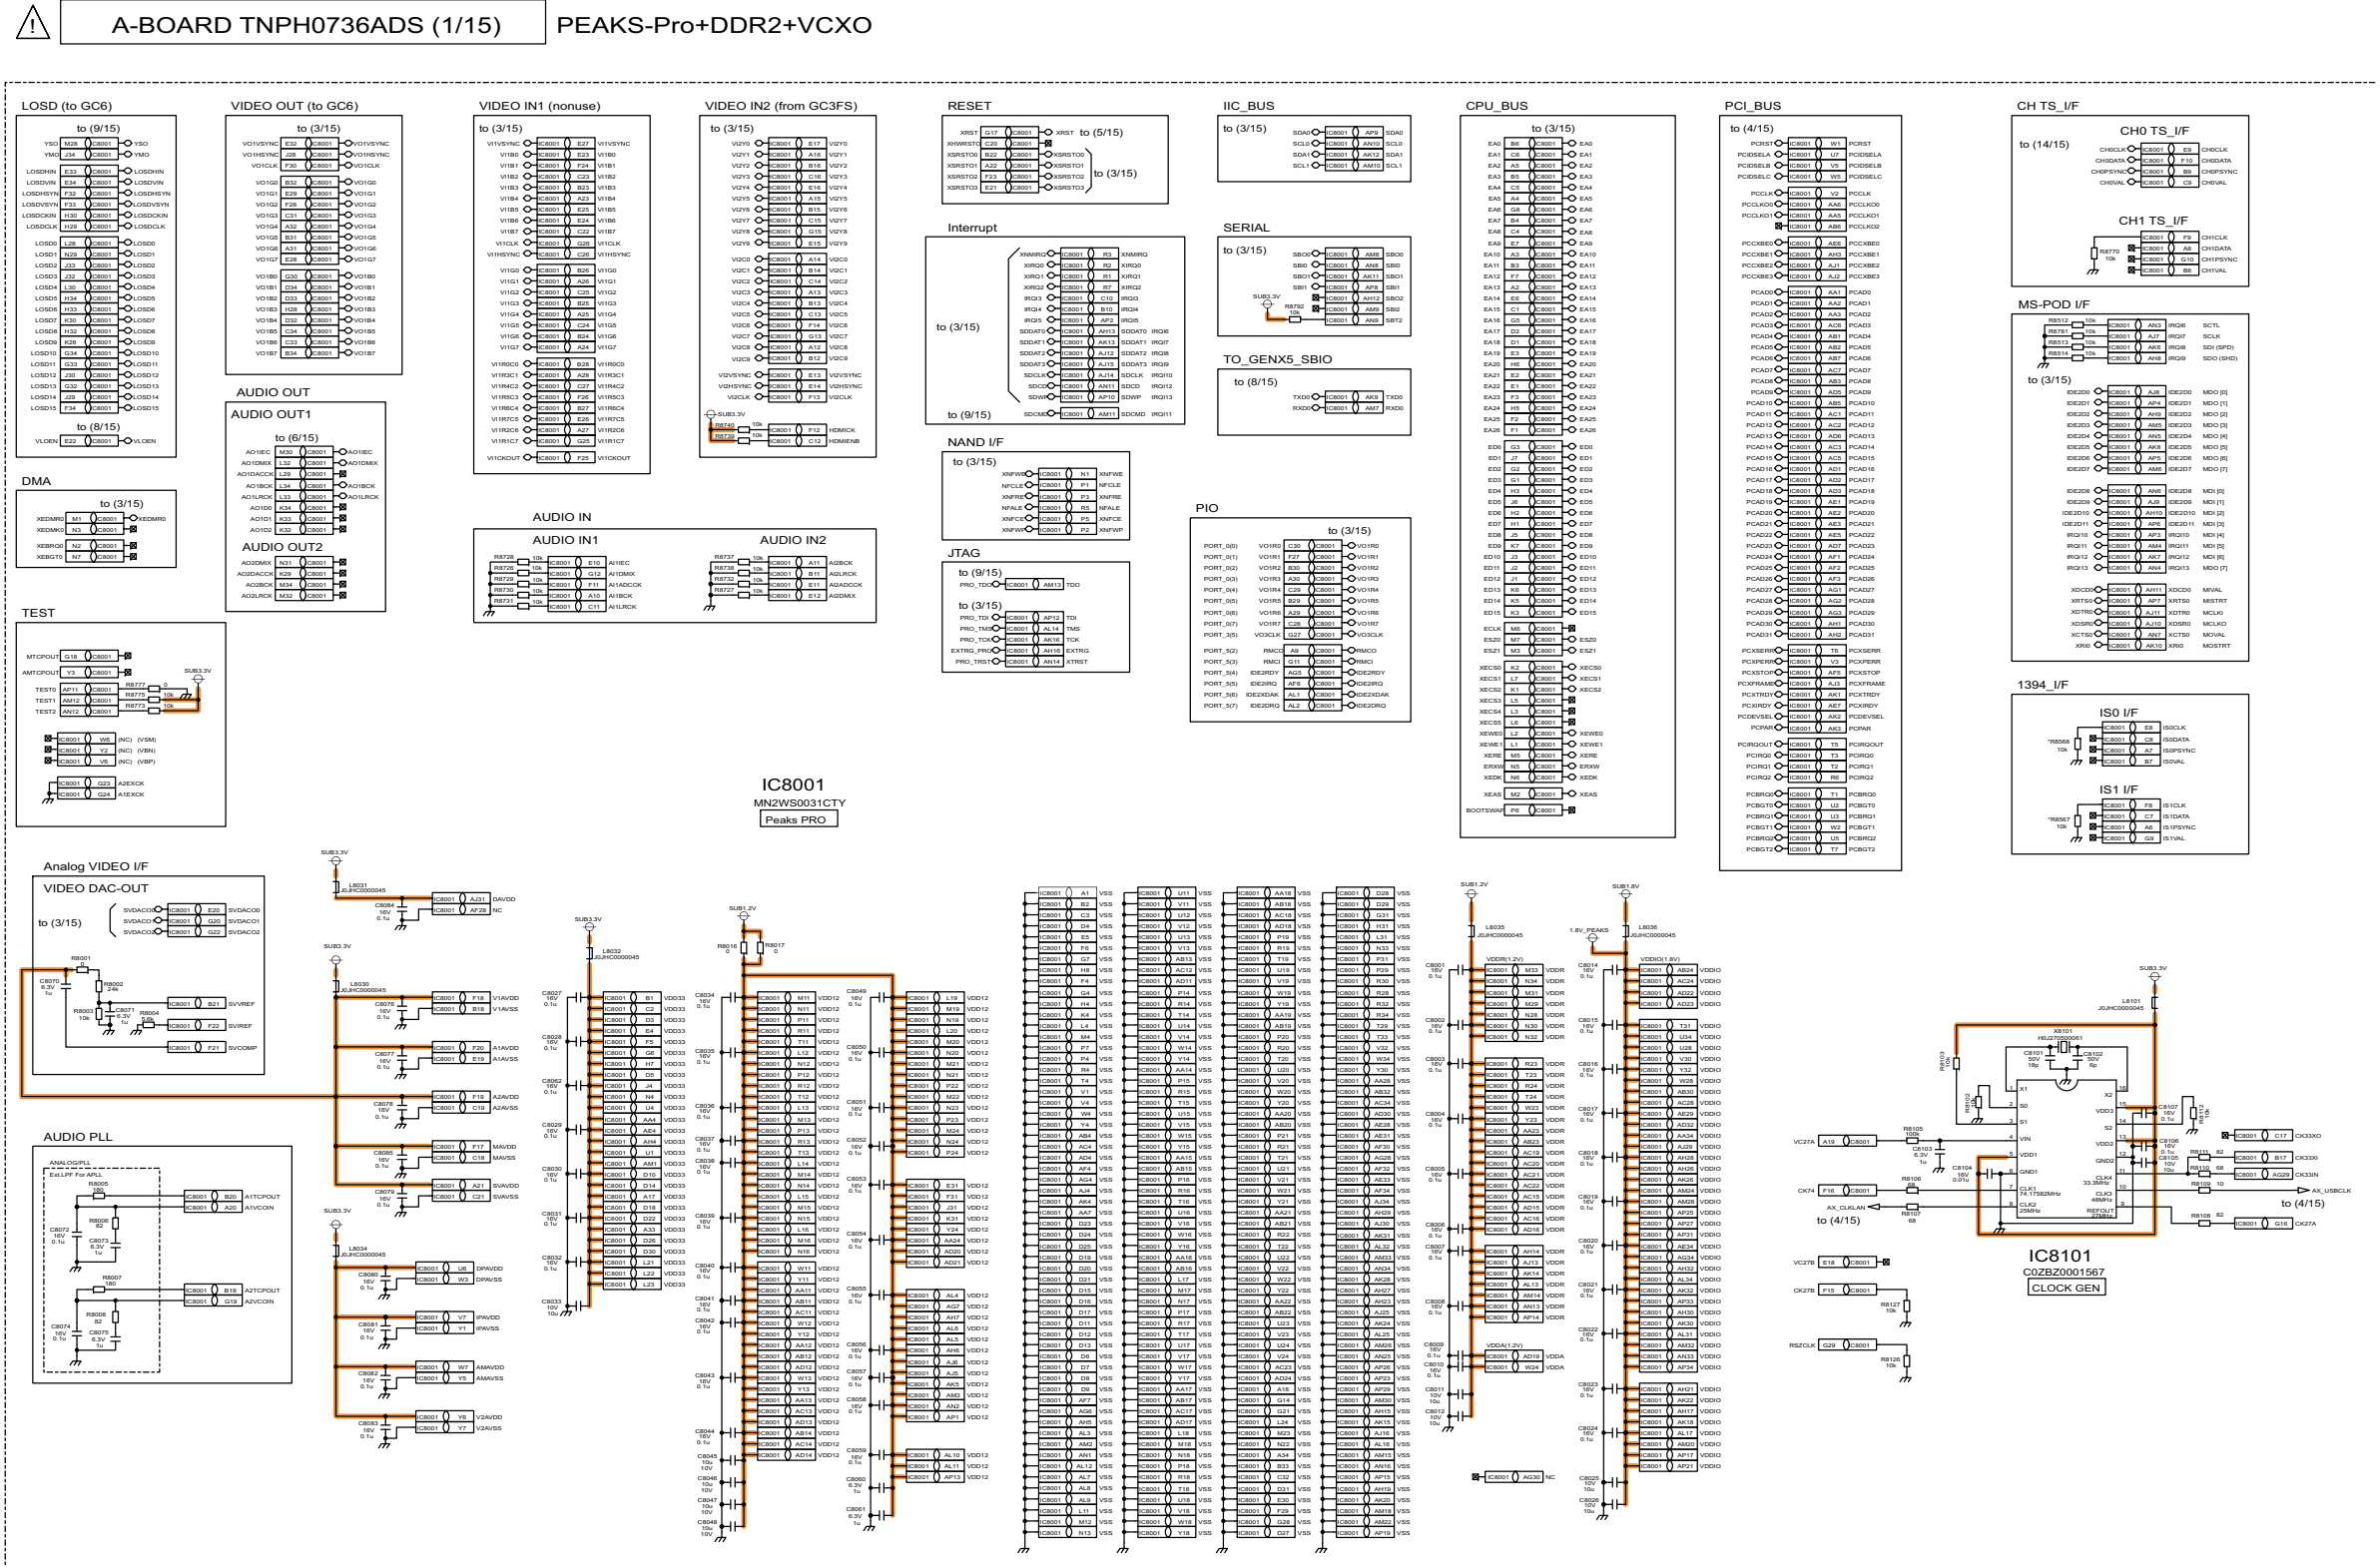

B

C

D



E

F

TH-65PZ850U
A-Board (1/15) Schematic Diagram

TH-65PZ850U
A-Board (1/15) Schematic Diagram


11.9. A-Board (2/15) Schematic Diagram

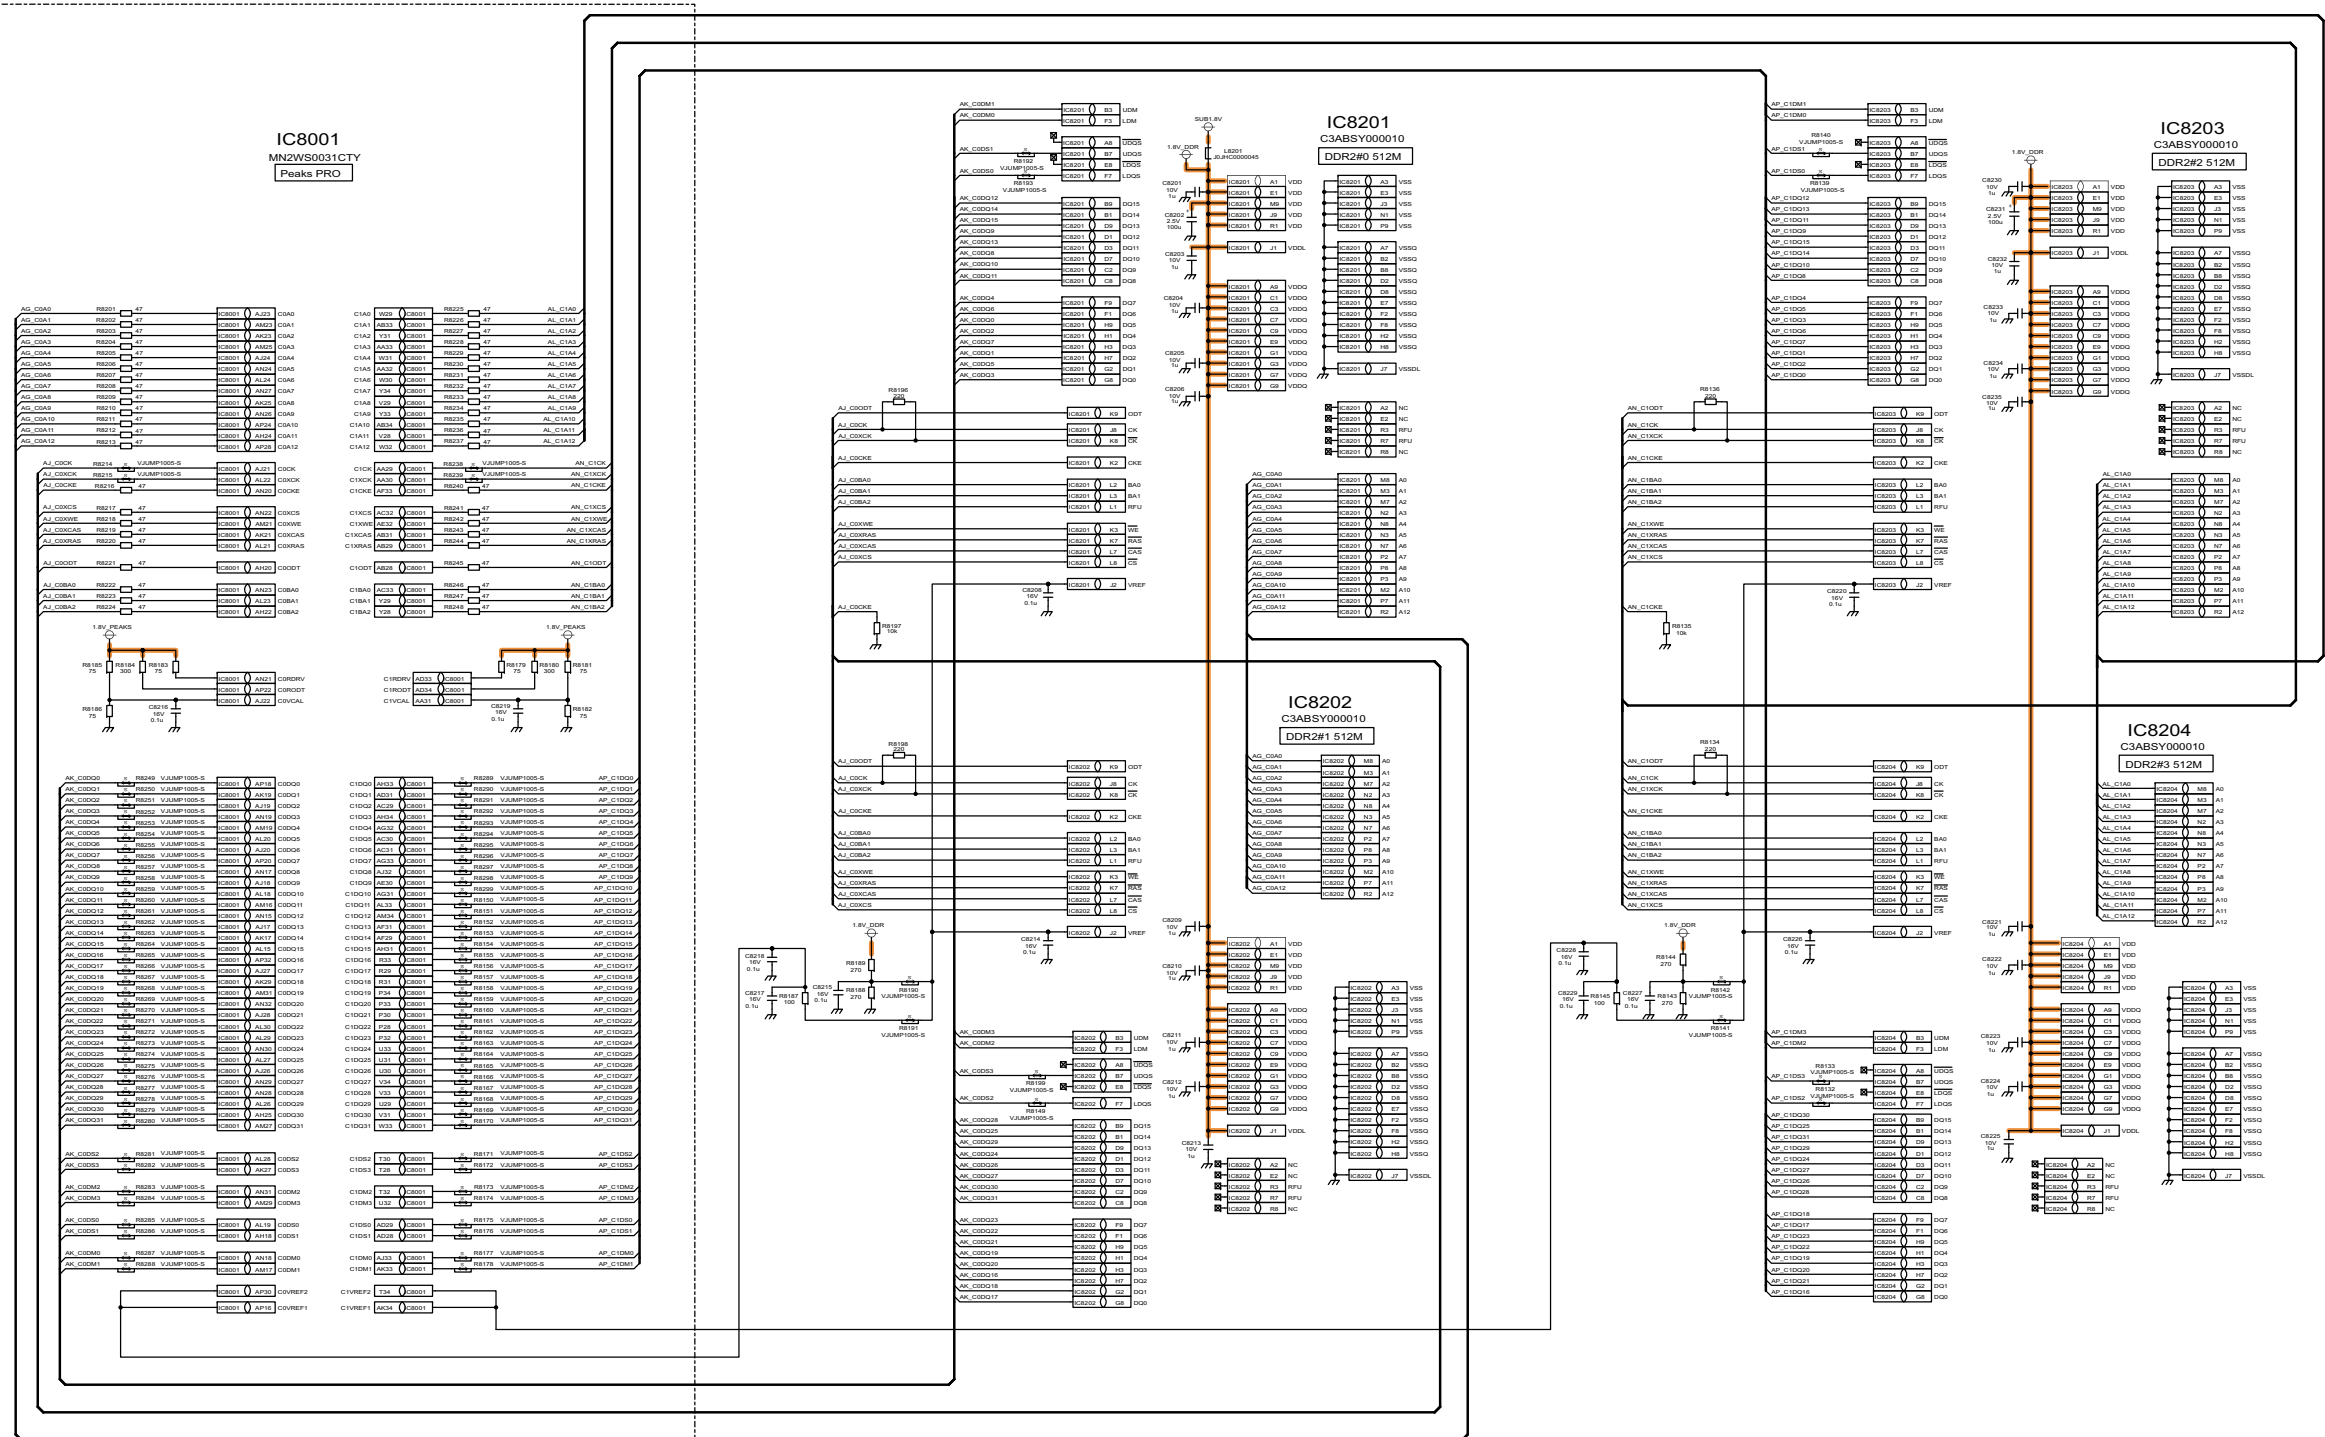


TH-65PZ850U
A-Board (2/15) Schematic Diagram

TH-65PZ850U
A-Board (2/15) Schematic Diagram

NAND,Boot,SupportCard







11.11. A-Board (4/15) Schematic Diagram

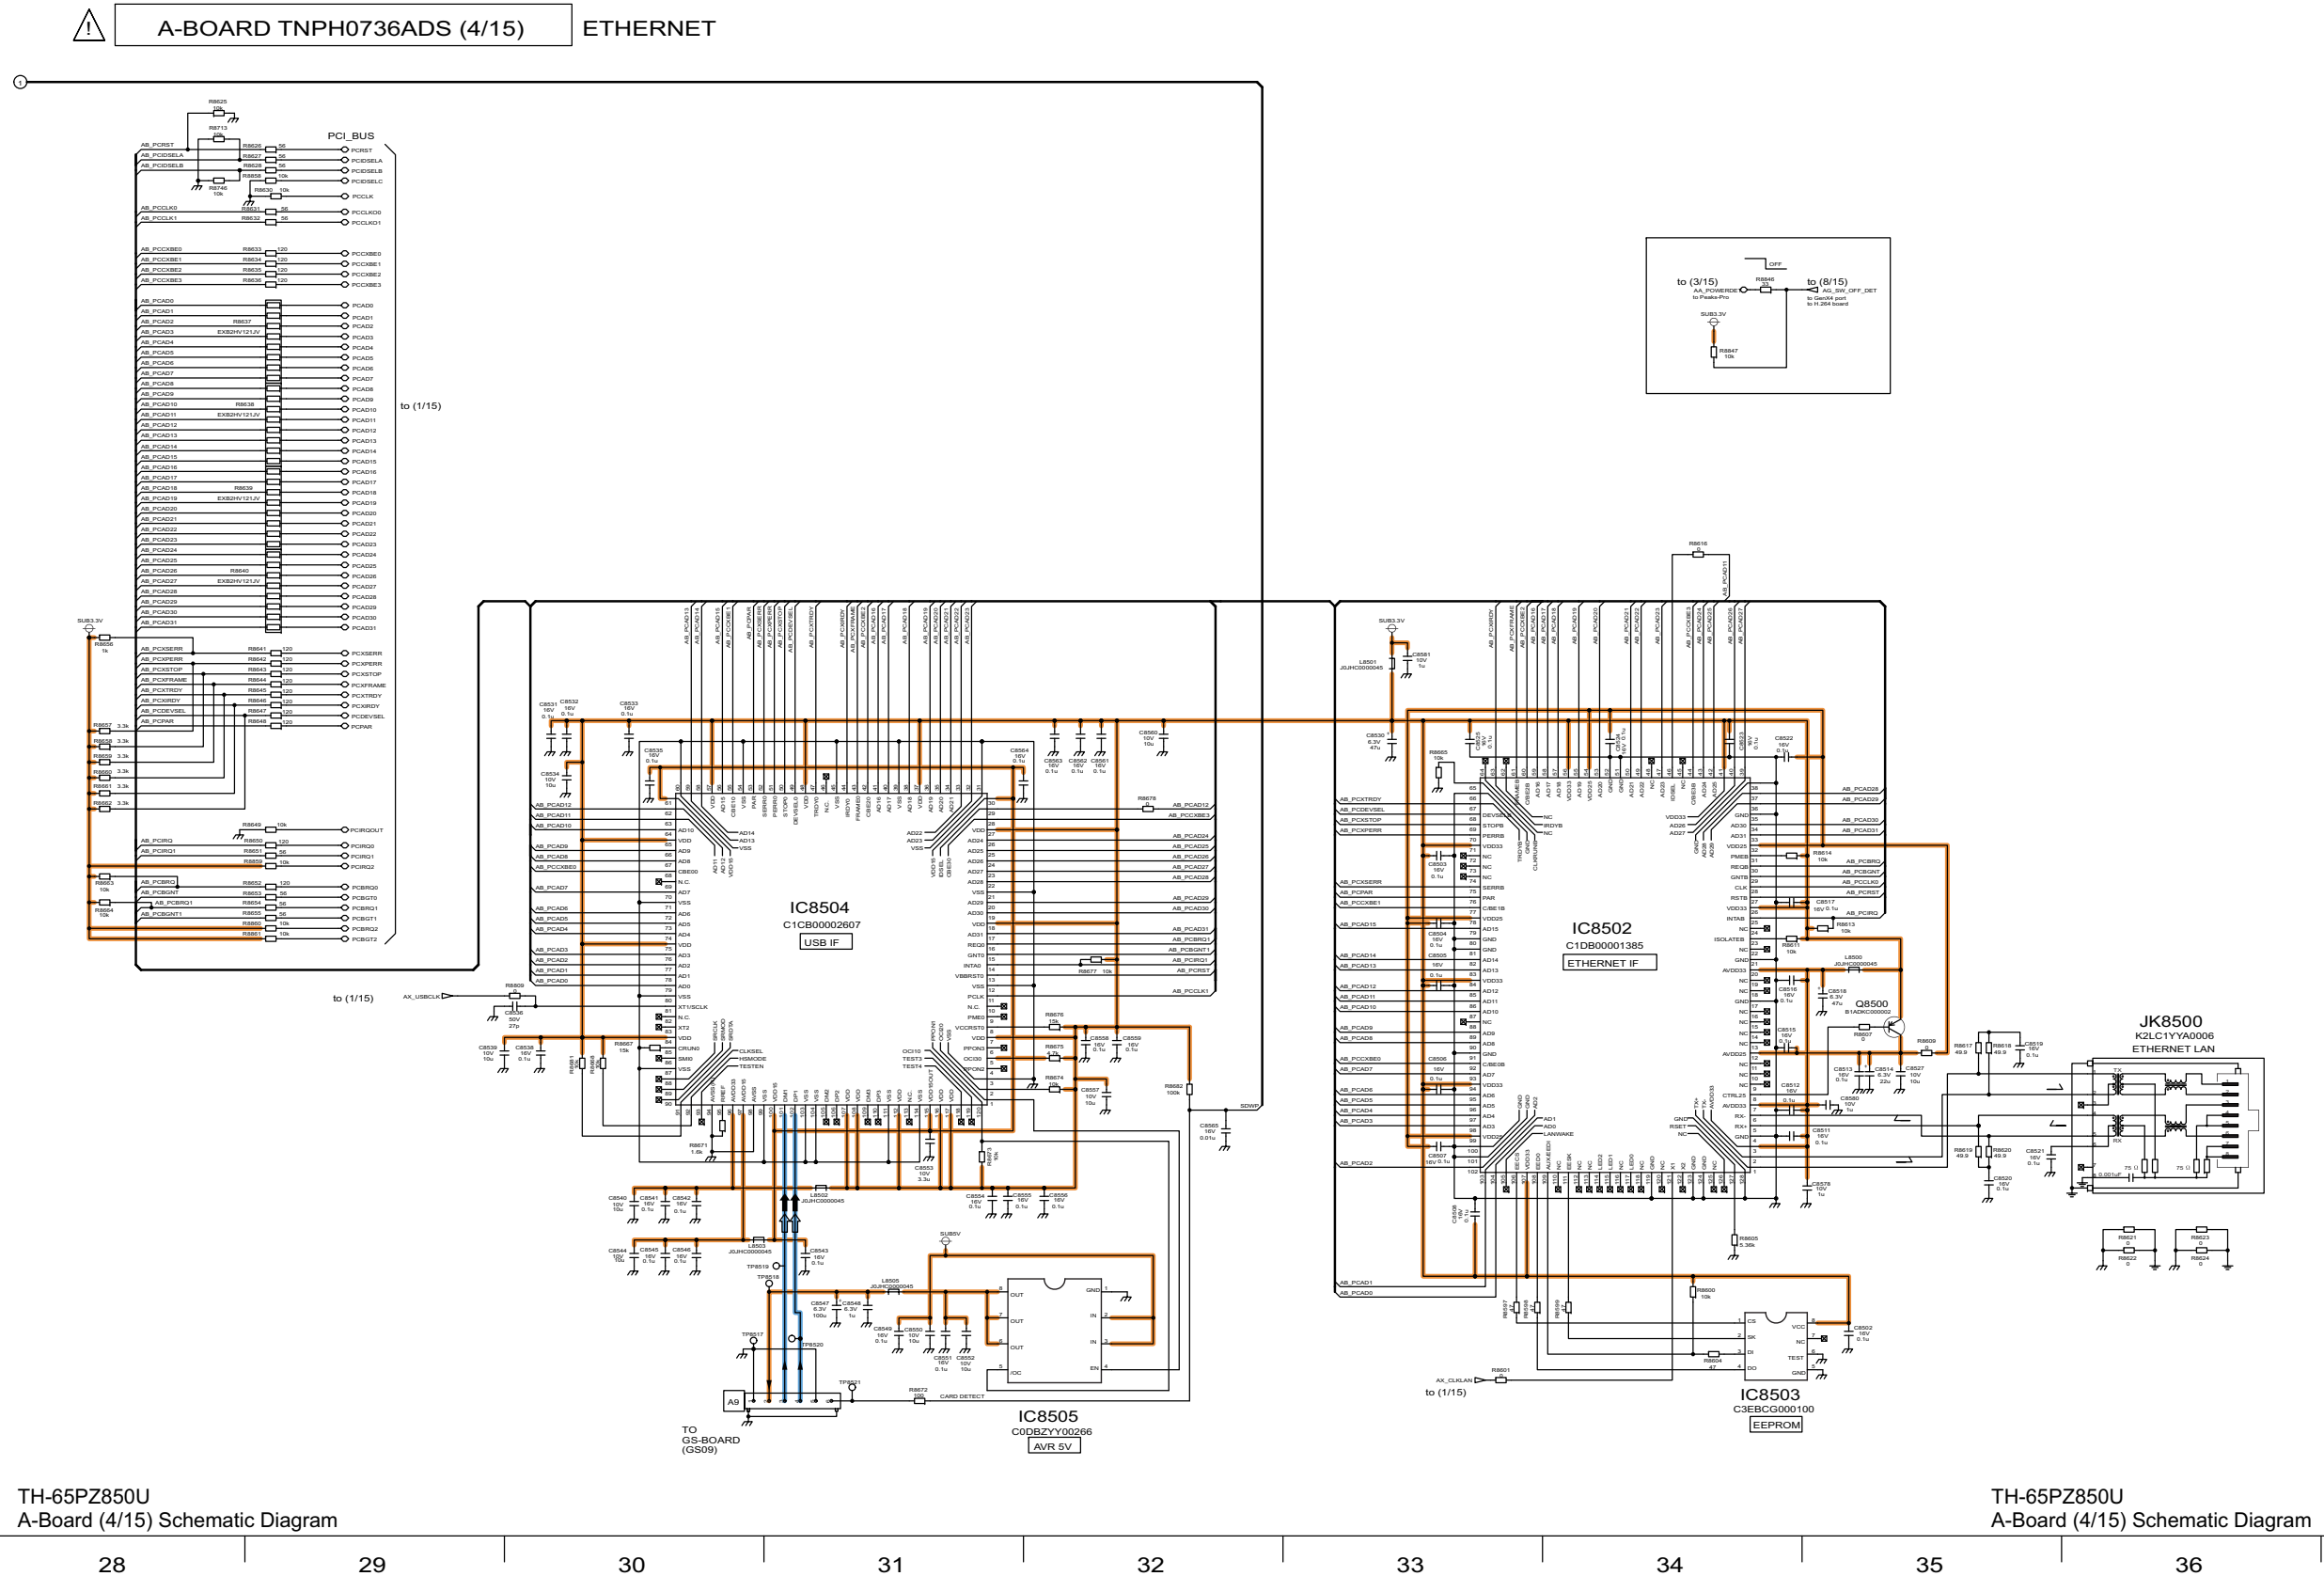


11.12. A-Board (5/15) Schematic Diagram

⚠ A-BOARD TNPH0736ADS (5/15) Power Supply (DC-DC)

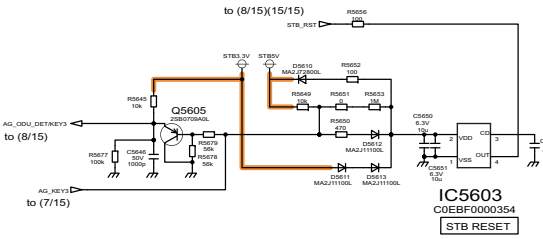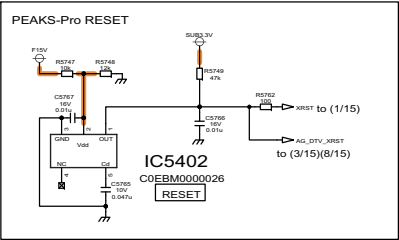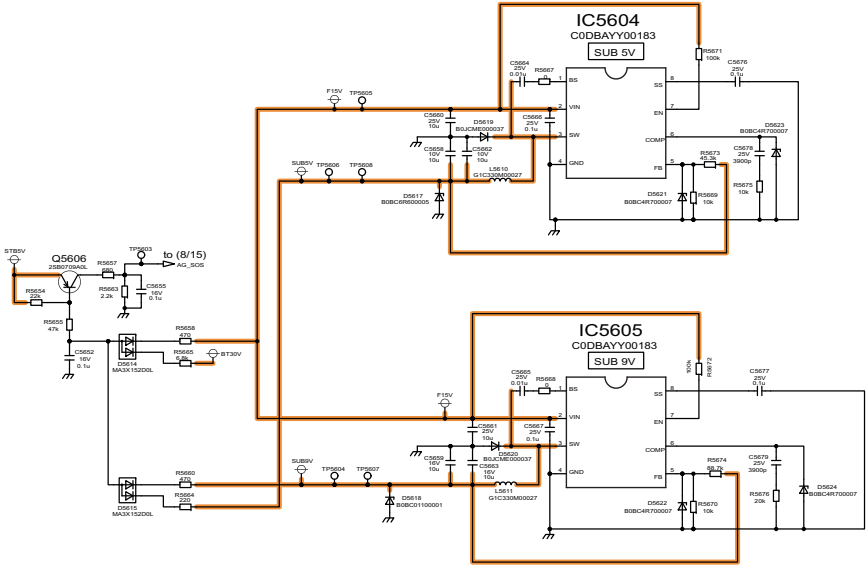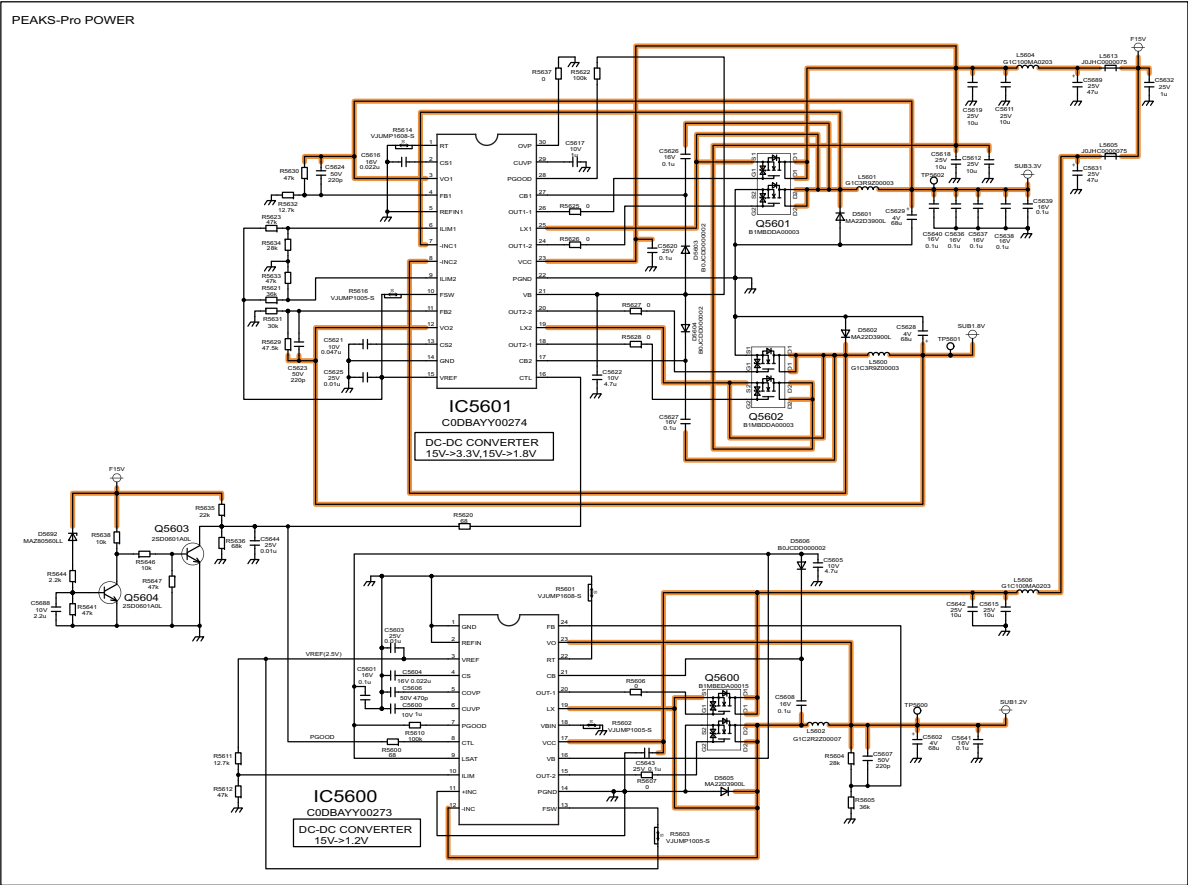


11.13. A-Board (6/15) Schematic Diagram

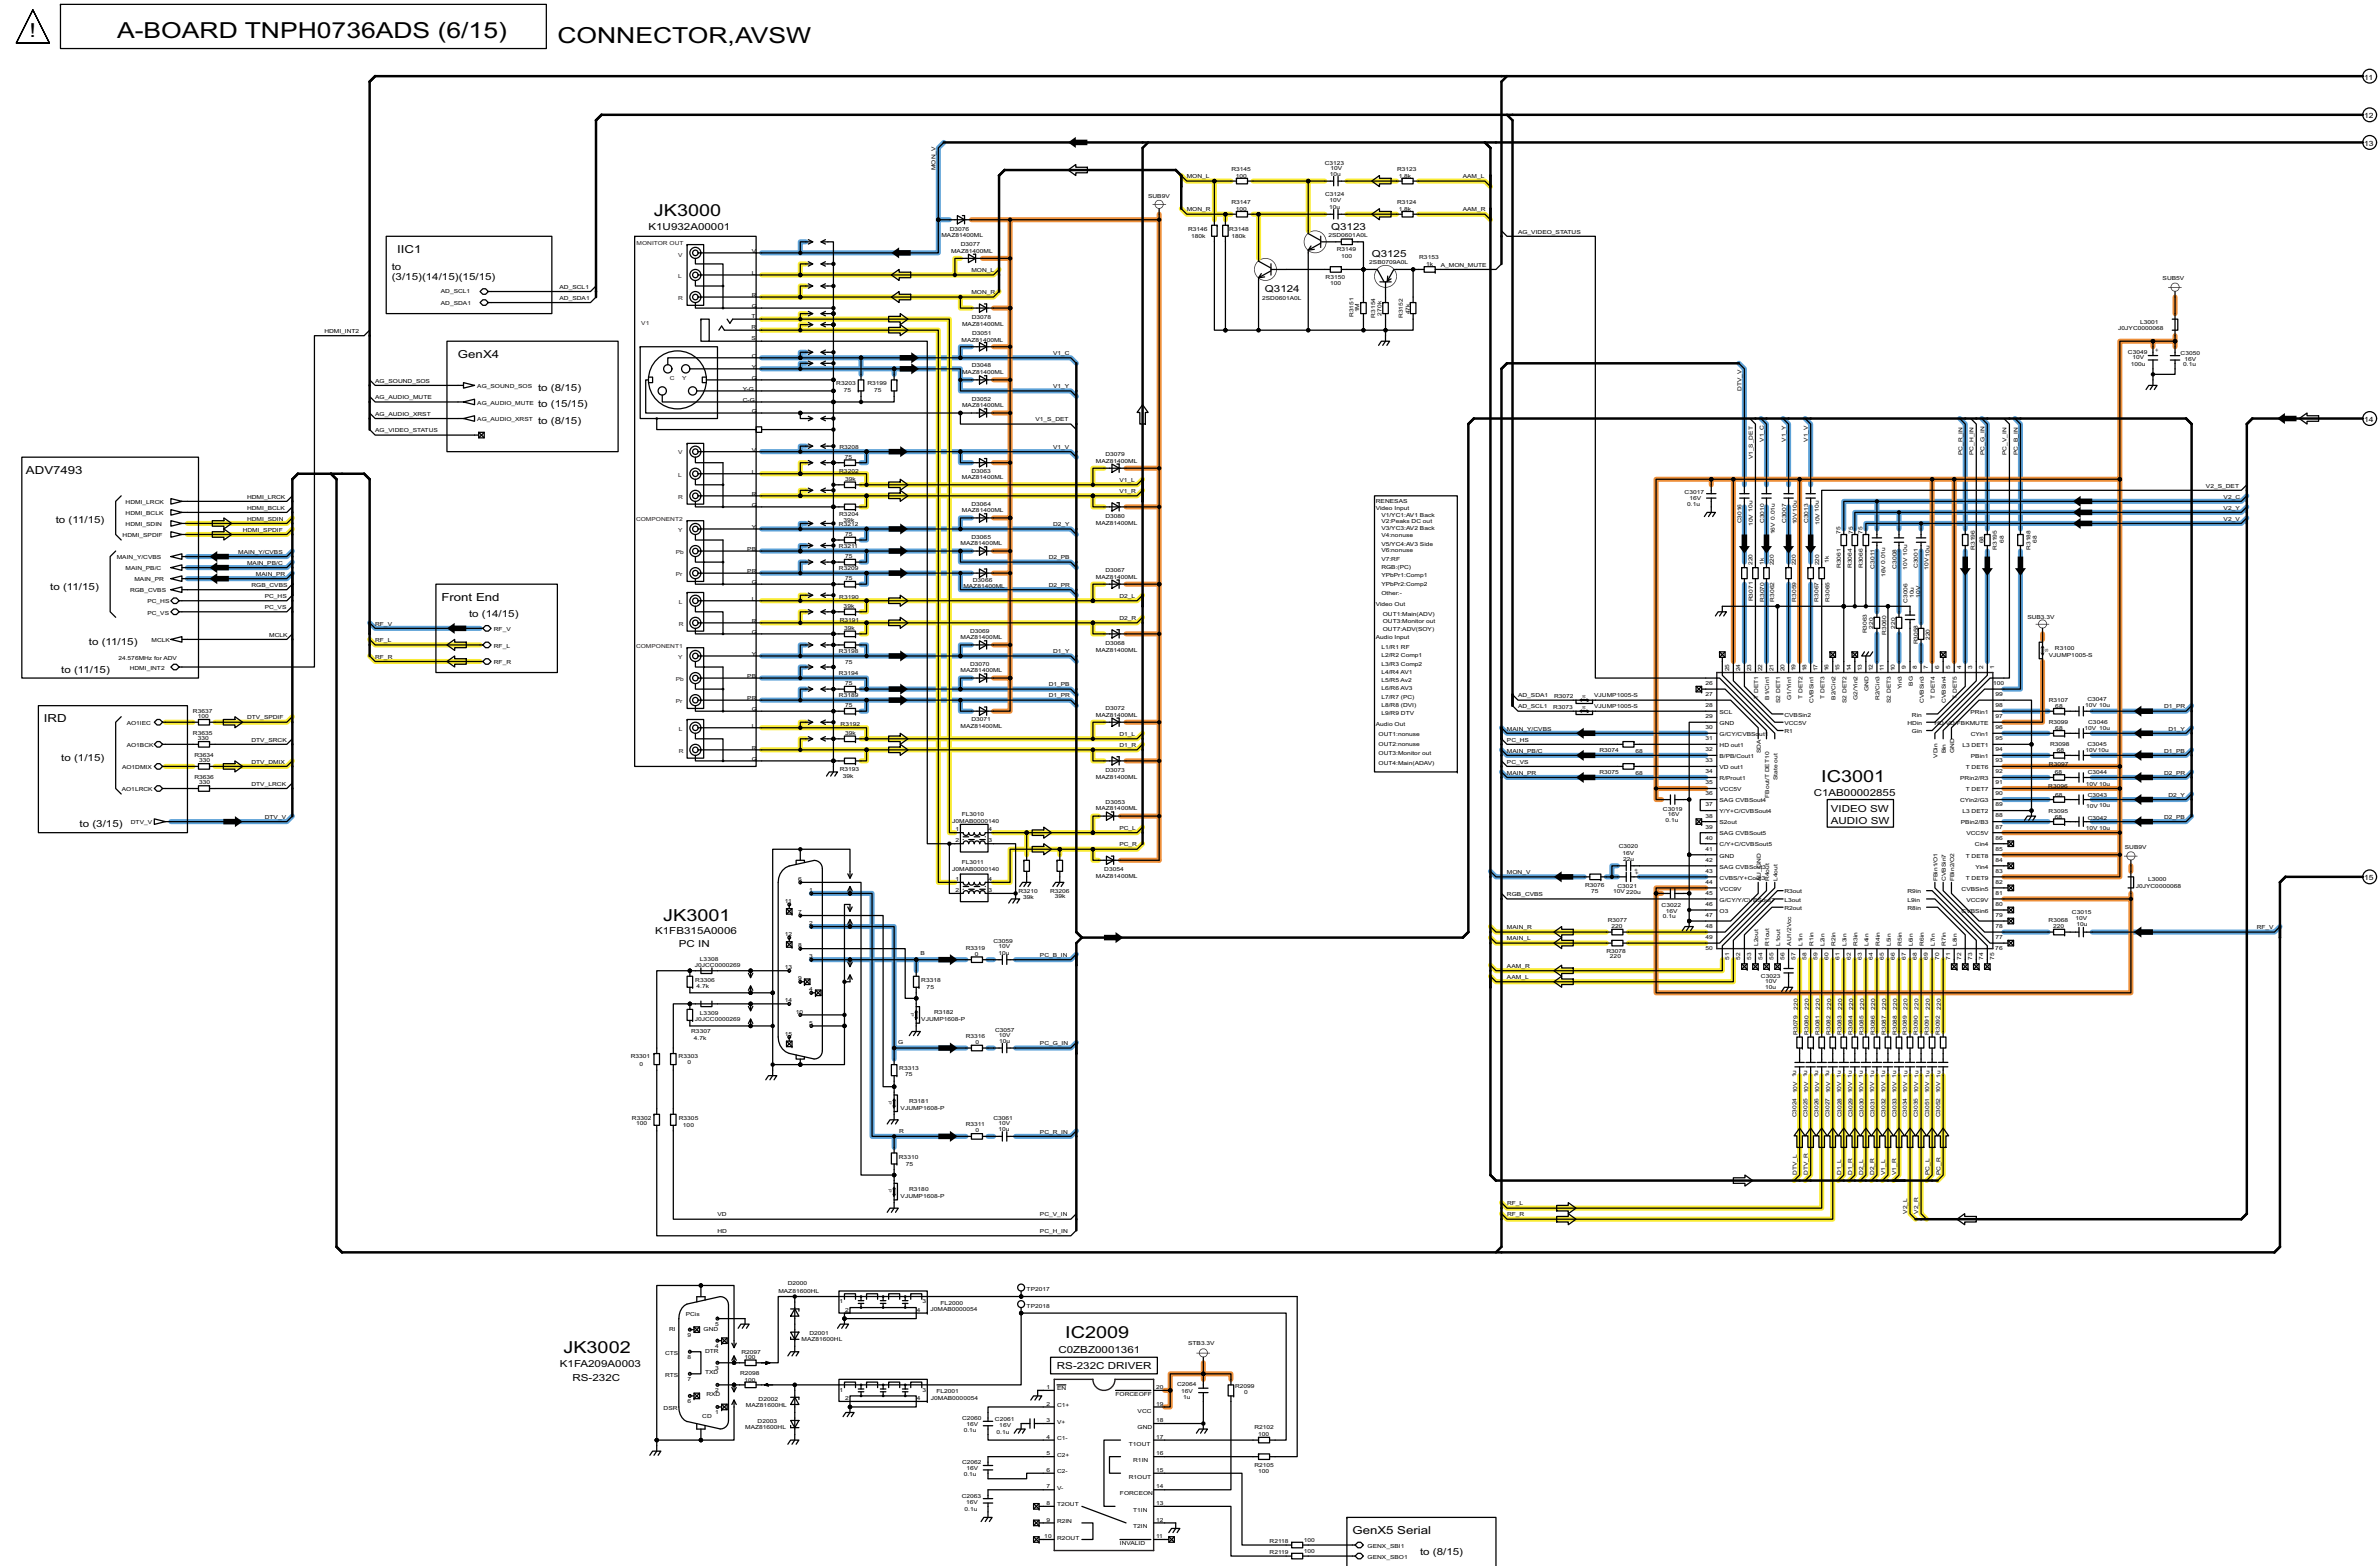

TH-65PZ850U
A-Board (6/15) Schematic Diagram

TH-65PZ850U
A-Board (6/15) Schematic Diagram


11.14. A-Board (7/15) Schematic Diagram

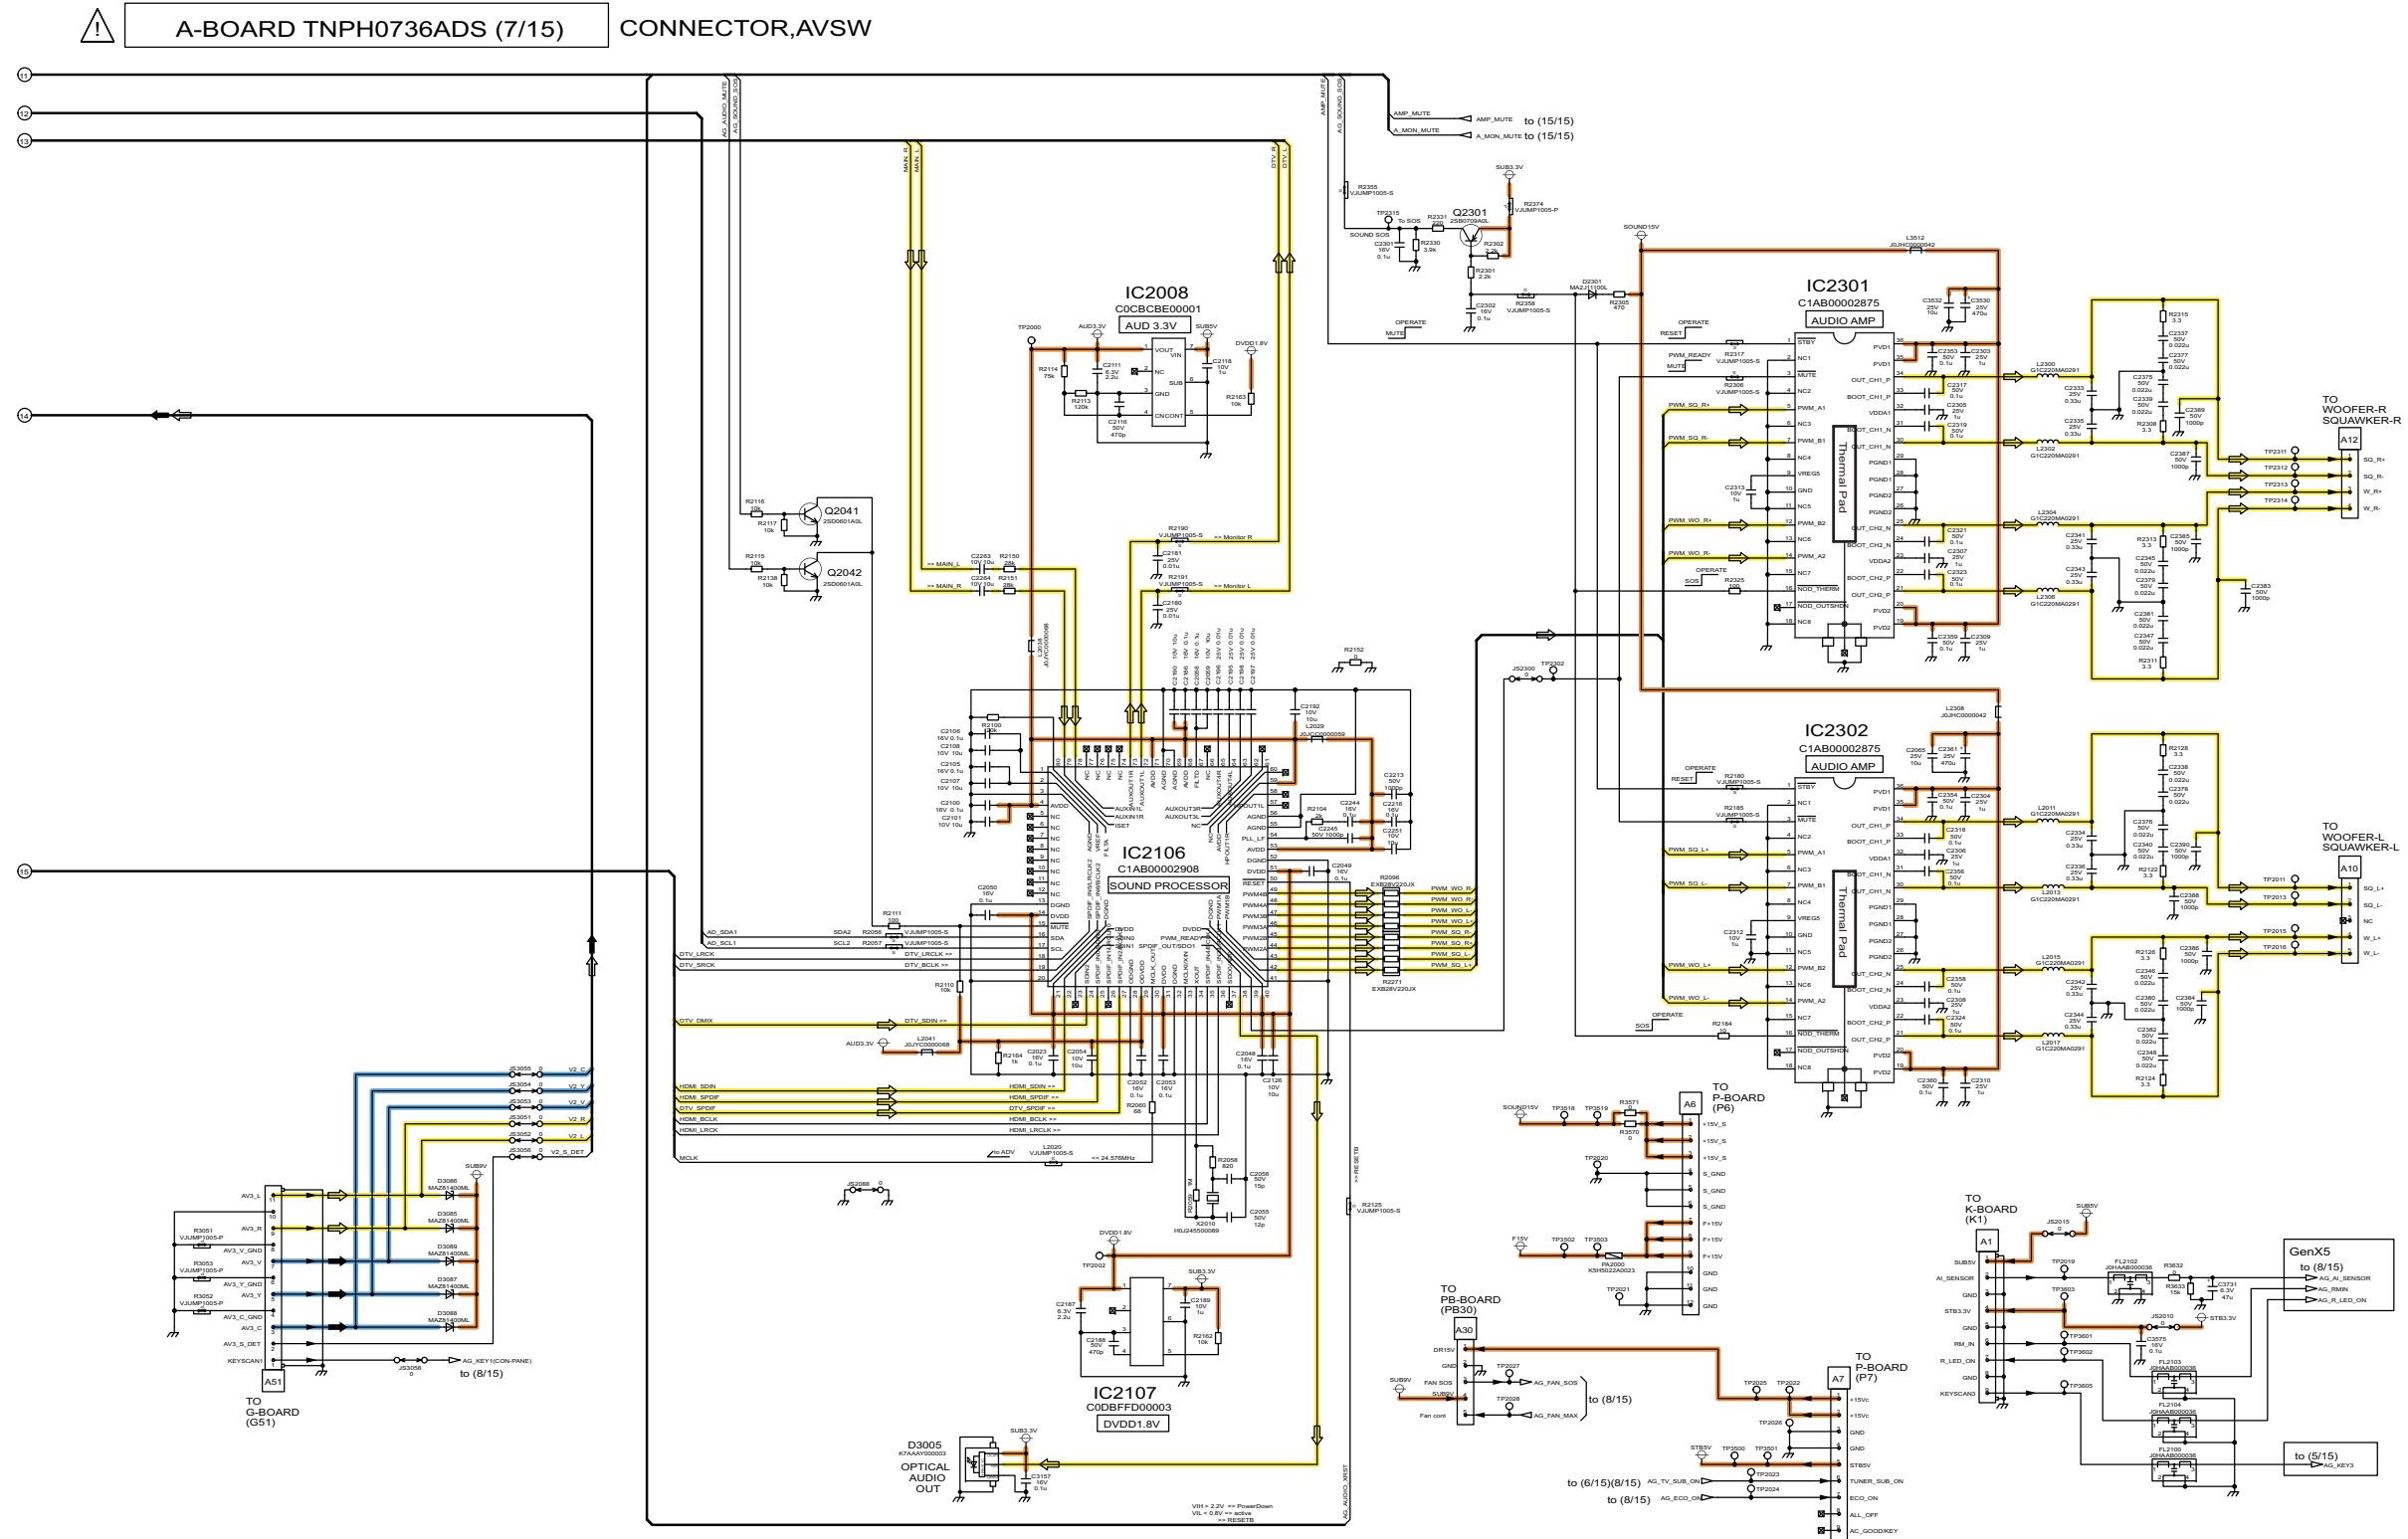

TH-65PZ850U
A-Board (7/15) Schematic Diagram

TH-65PZ850U
A-Board (7/15) Schematic Diagram

11.15. A-Board (8/15) Schematic Diagram


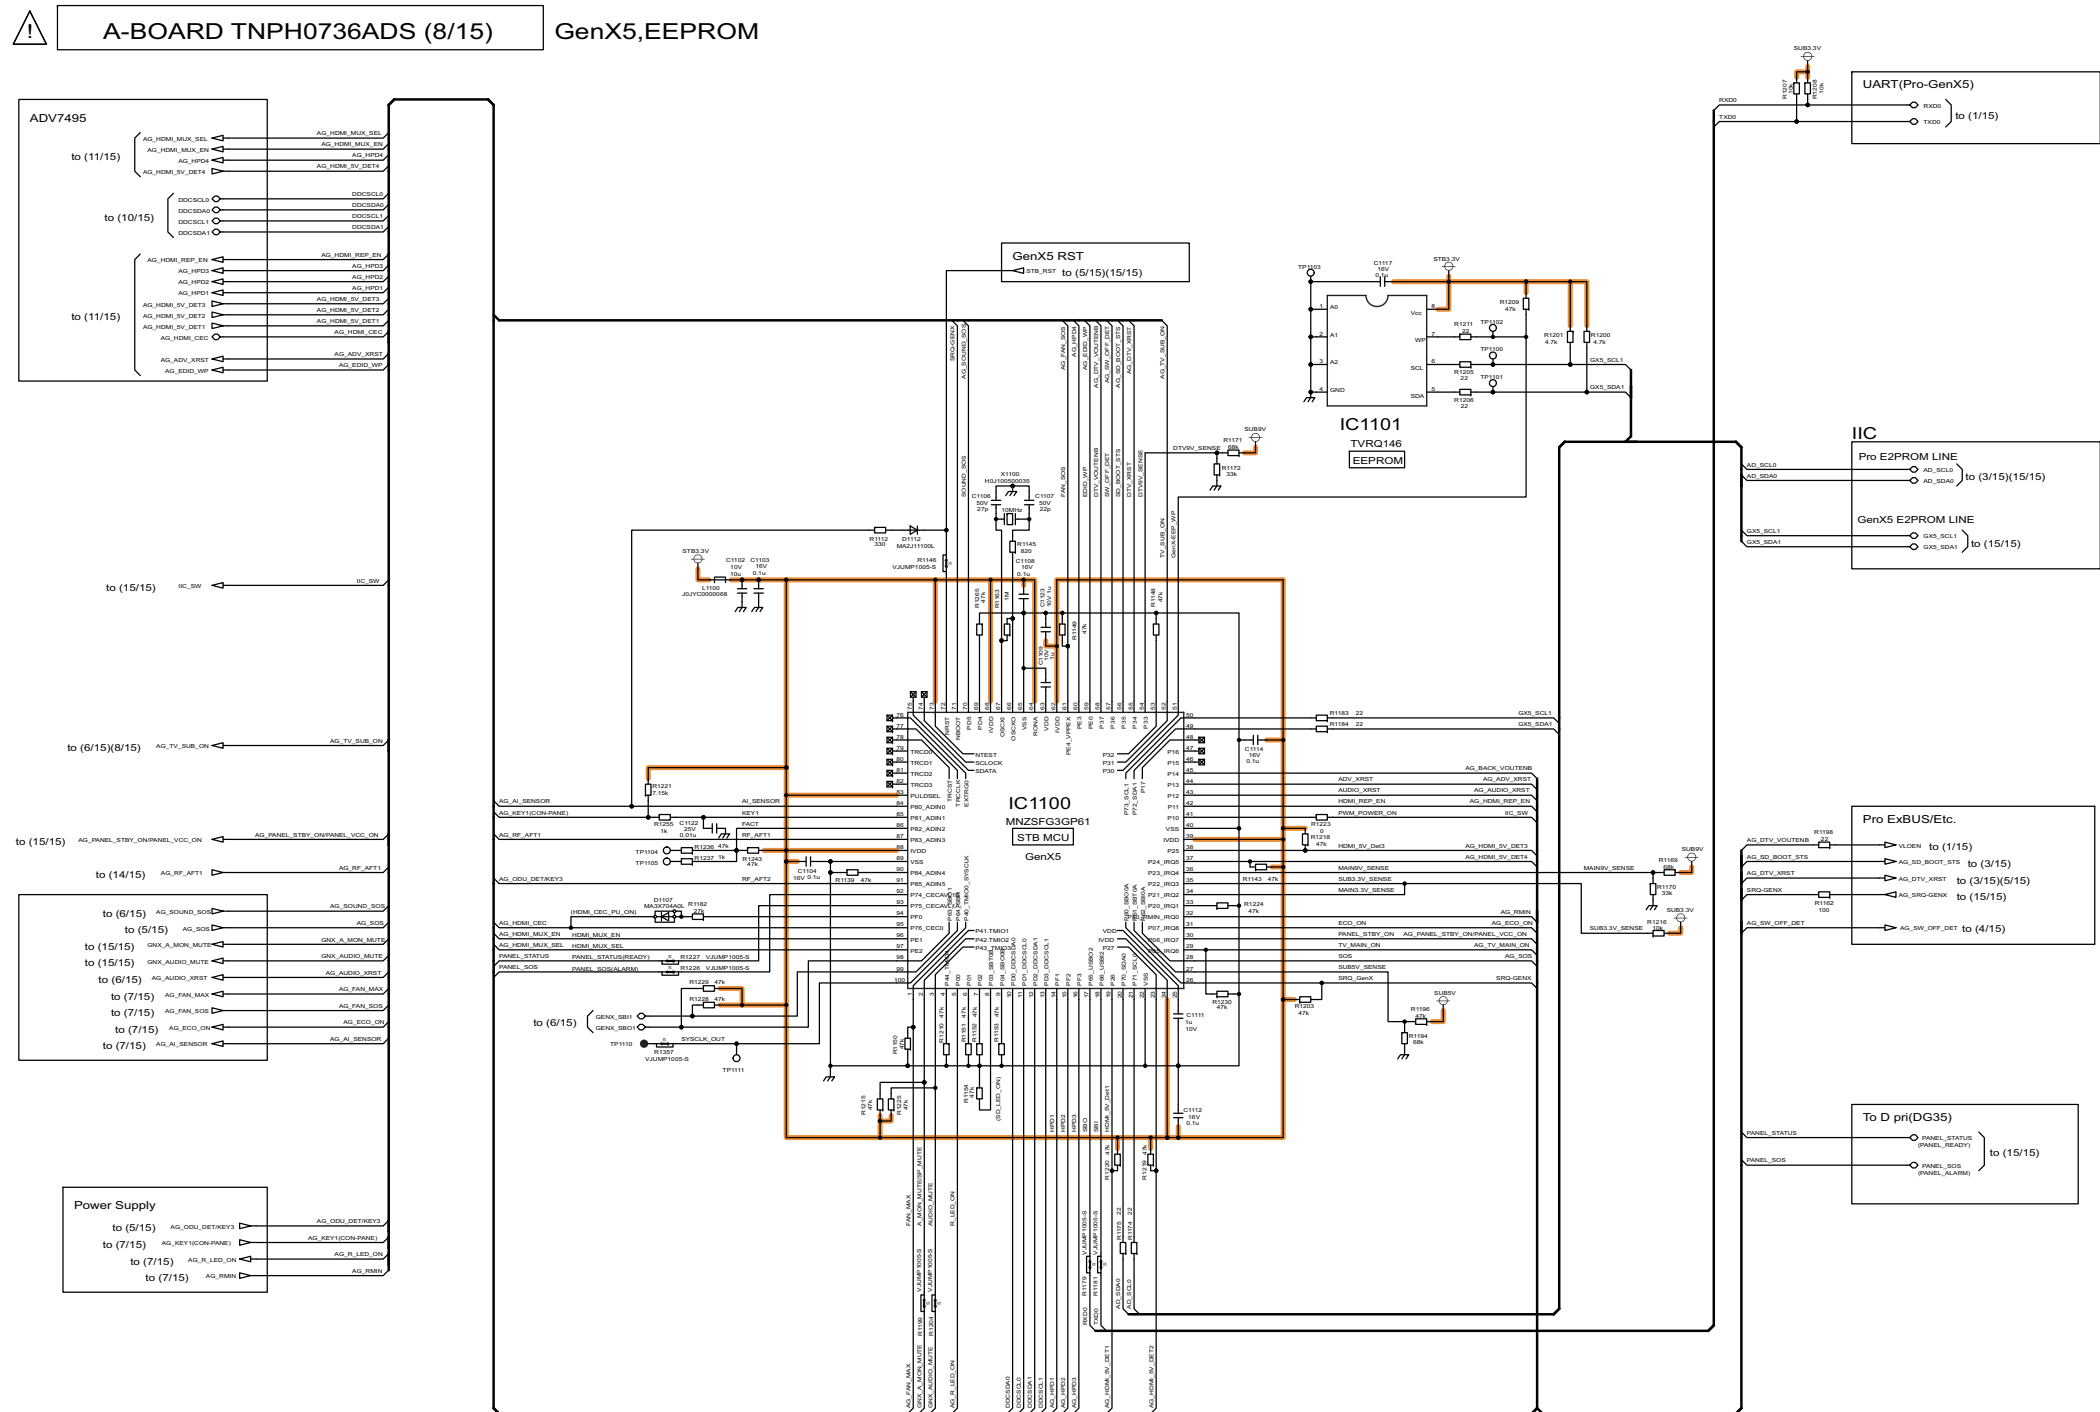


11.16. A-Board (9/15) Schematic Diagram



A-BOARD TNPH0736ADS (9/15)


GC6 pin PROCESSING

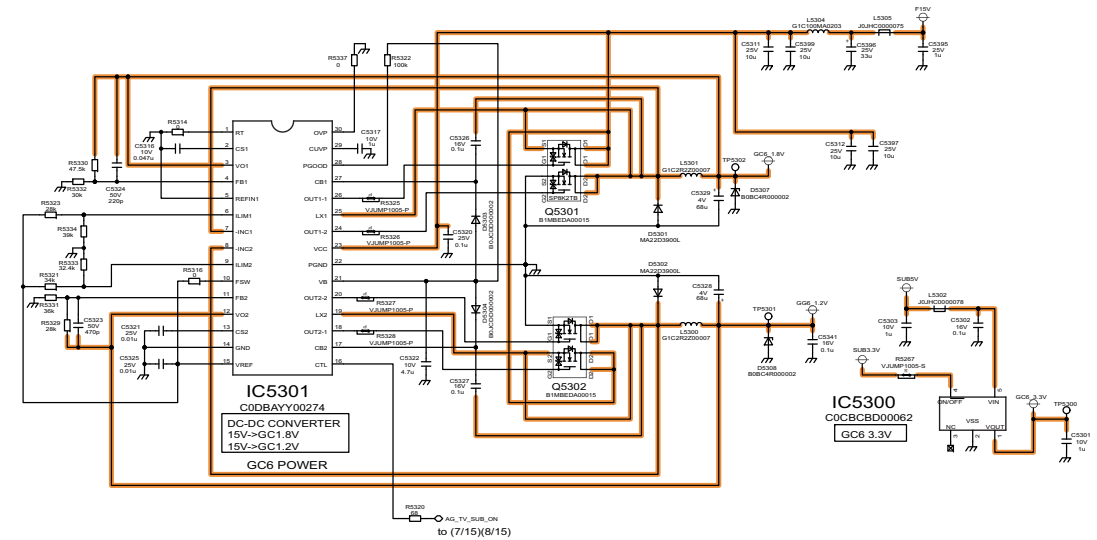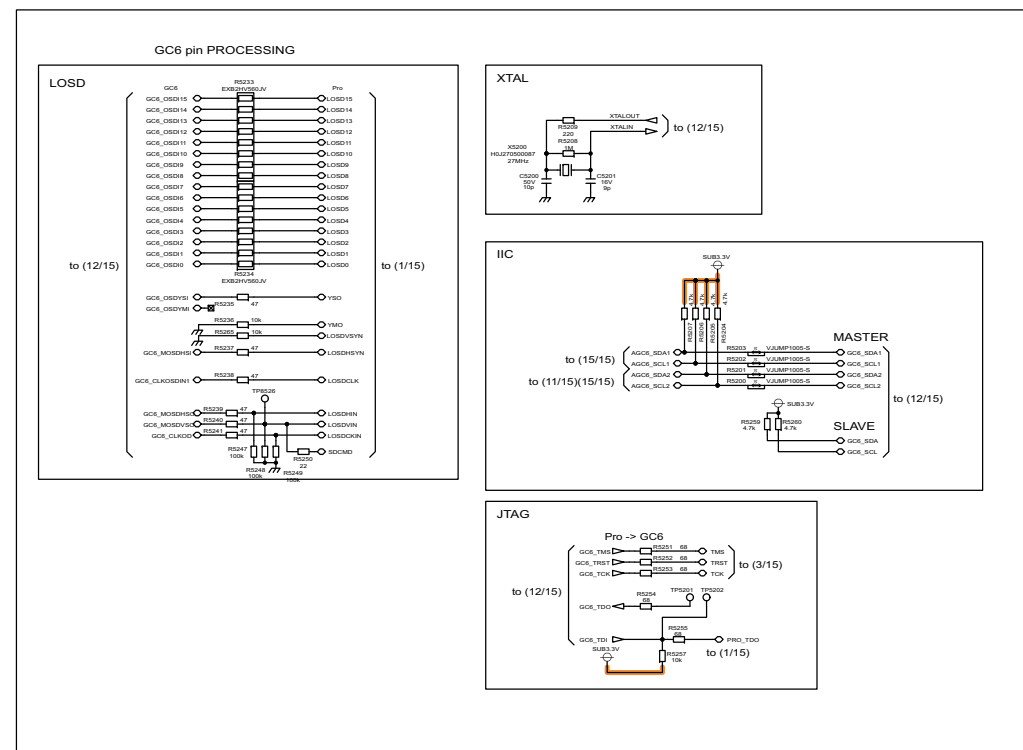

TH-65PZ850U
A-Board (9/15) Schematic Diagram

TH-65PZ850U
A-Board (9/15) Schematic Diagram

11.17. A-Board (10/15) Schematic Diagram

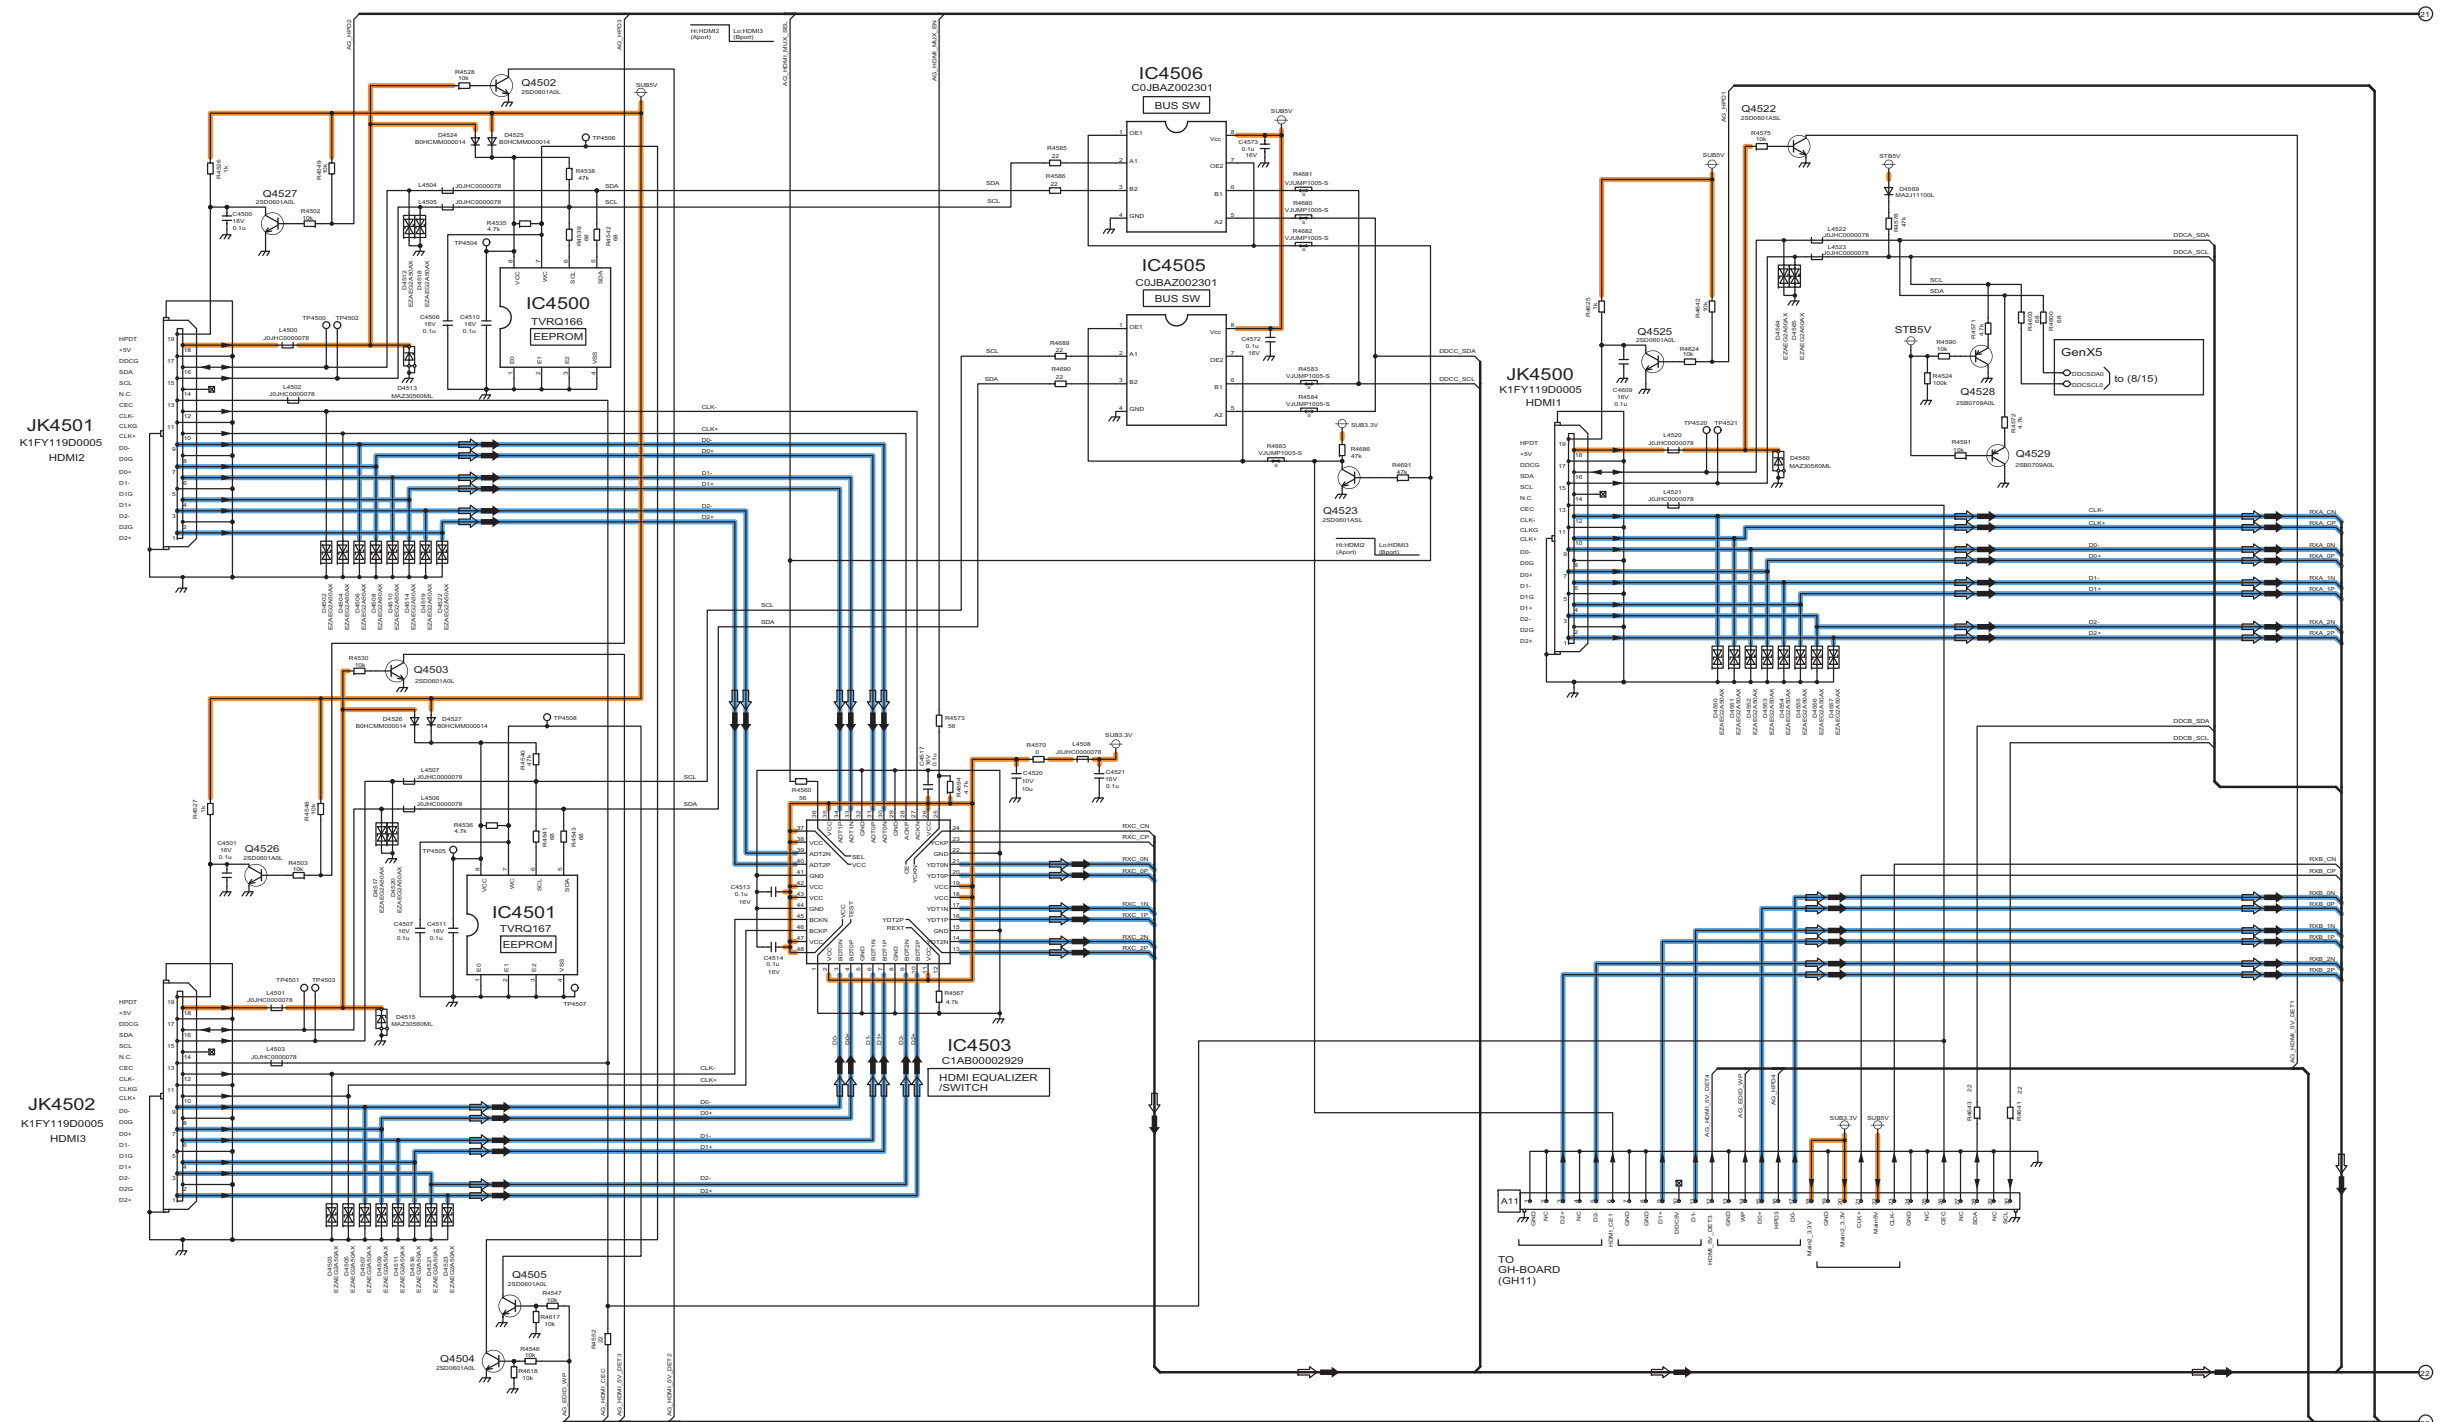


TH-65PZ850U
A-Board (10/15) Schematic Diagram

TH-65PZ850U
A-Board (10/15) Schematic Diagram

11.18. A-Board (11/15) Schematic Diagram


! A-BOARD TNPH0736ADS (11/15) ADV7495,HDMI-EQ

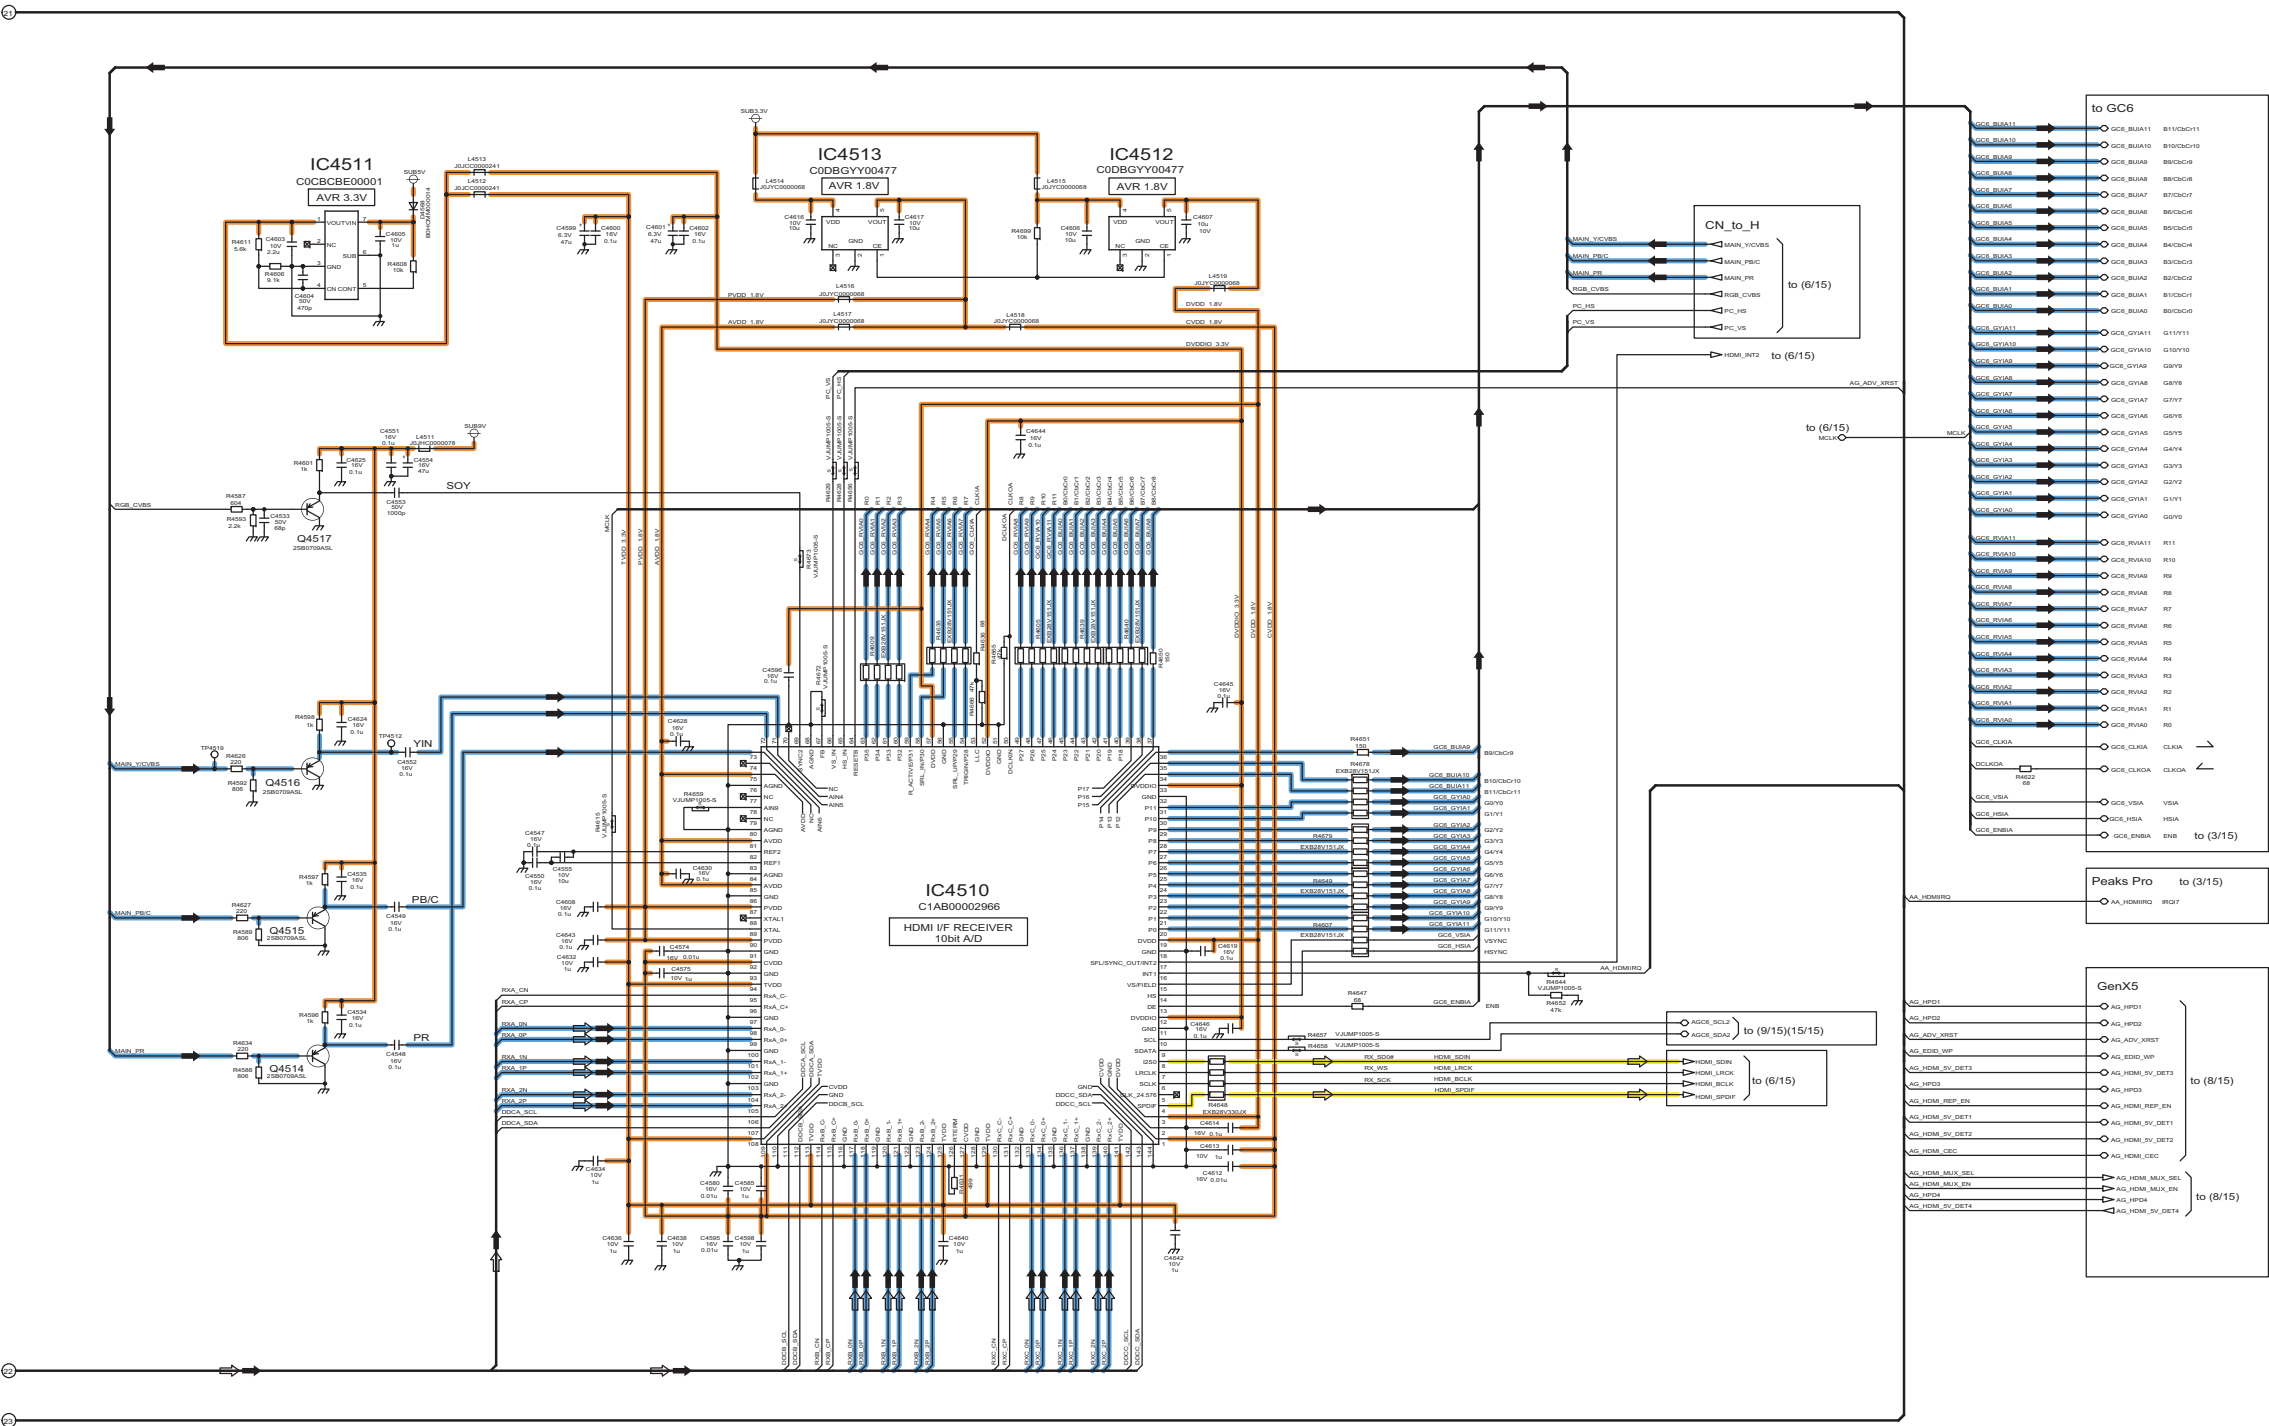


TH-65PZ850U
A-Board (11/15) Schematic Diagram

TH-65PZ850U
A-Board (11/15) Schematic Diagram

11.19. A-Board (12/15) Schematic Diagram

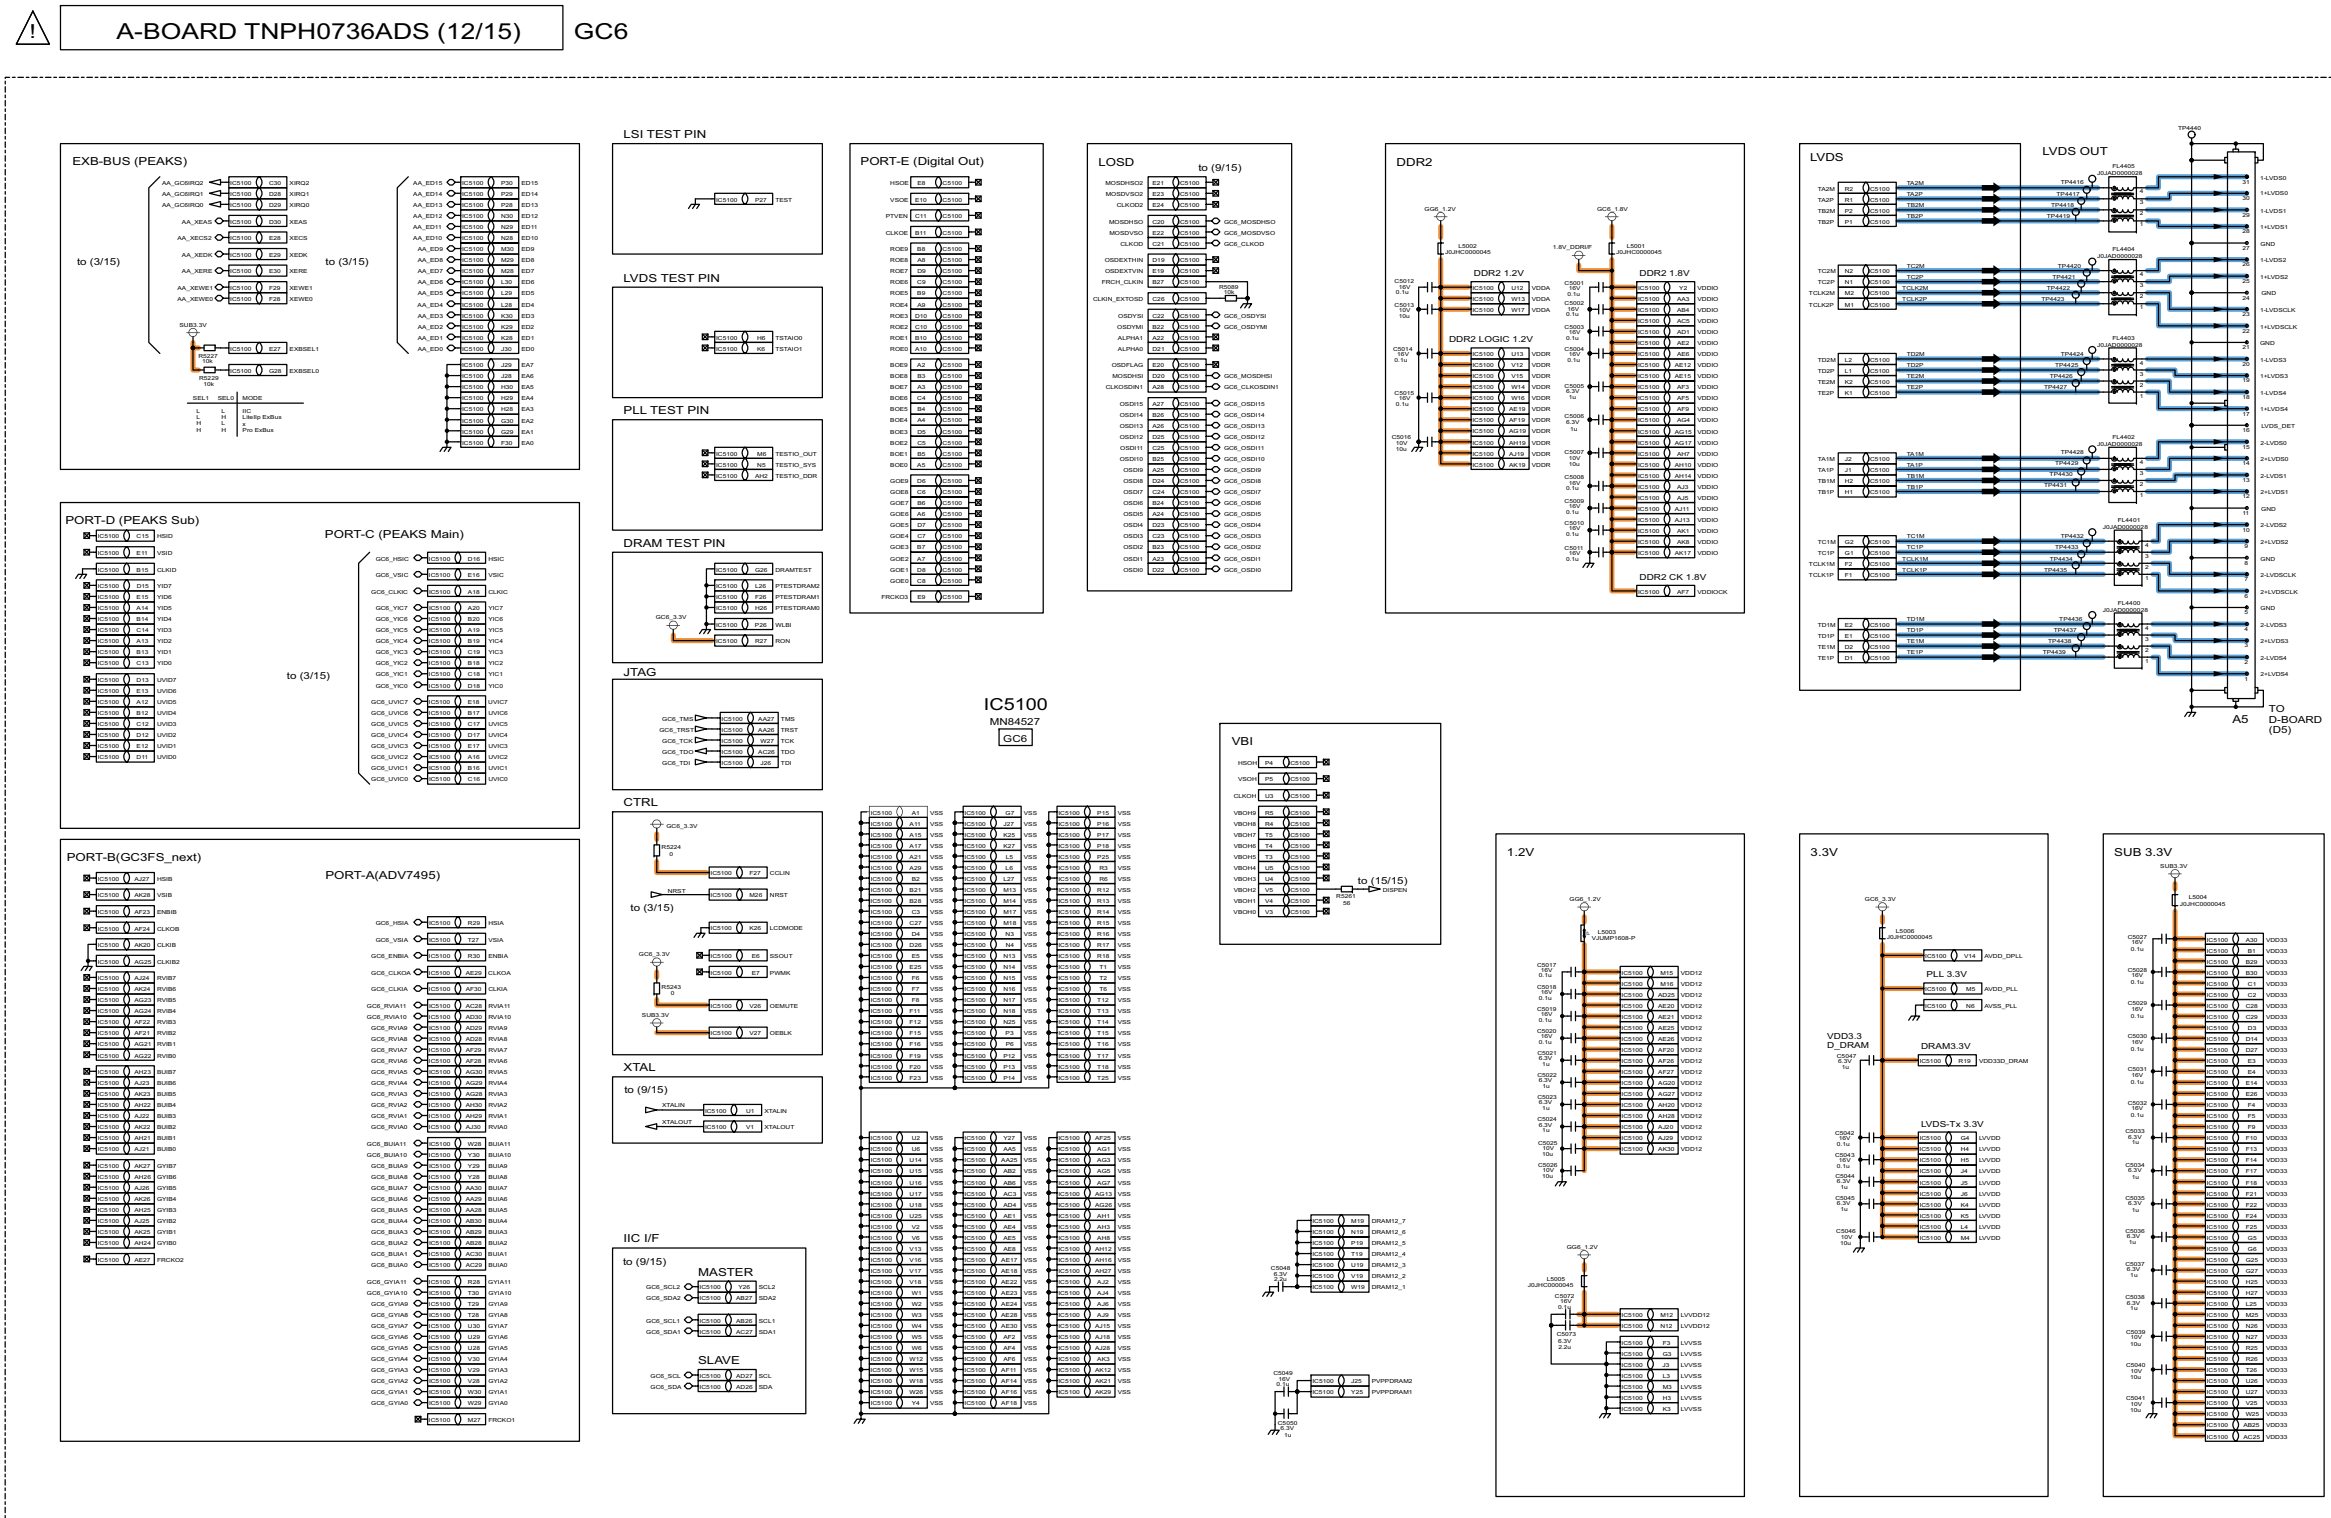


11.20. A-Board (13/15) Schematic Diagram

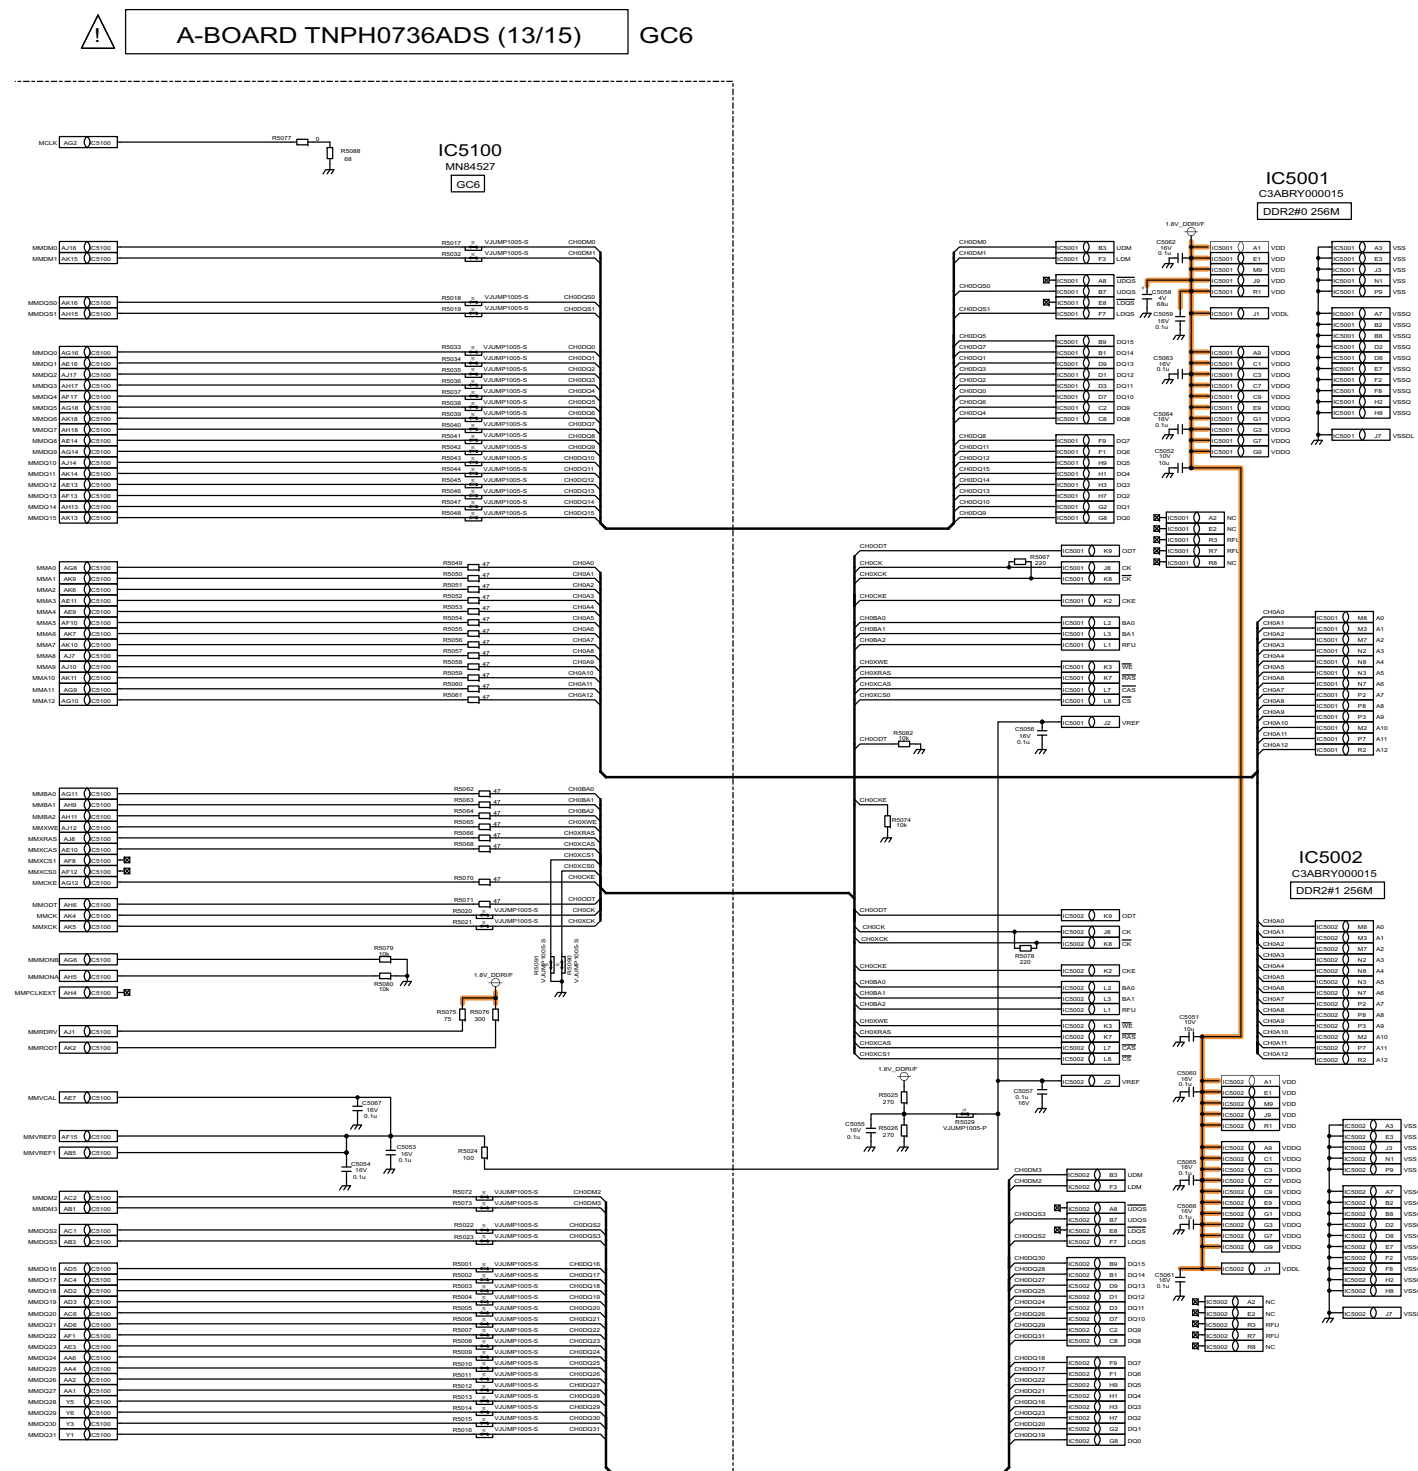

TH-65PZ850U
A-Board (13/15) Schematic Diagram

TH-65PZ850U
A-Board (13/15) Schematic Diagram


11.21. A-Board (14/15) Schematic Diagram

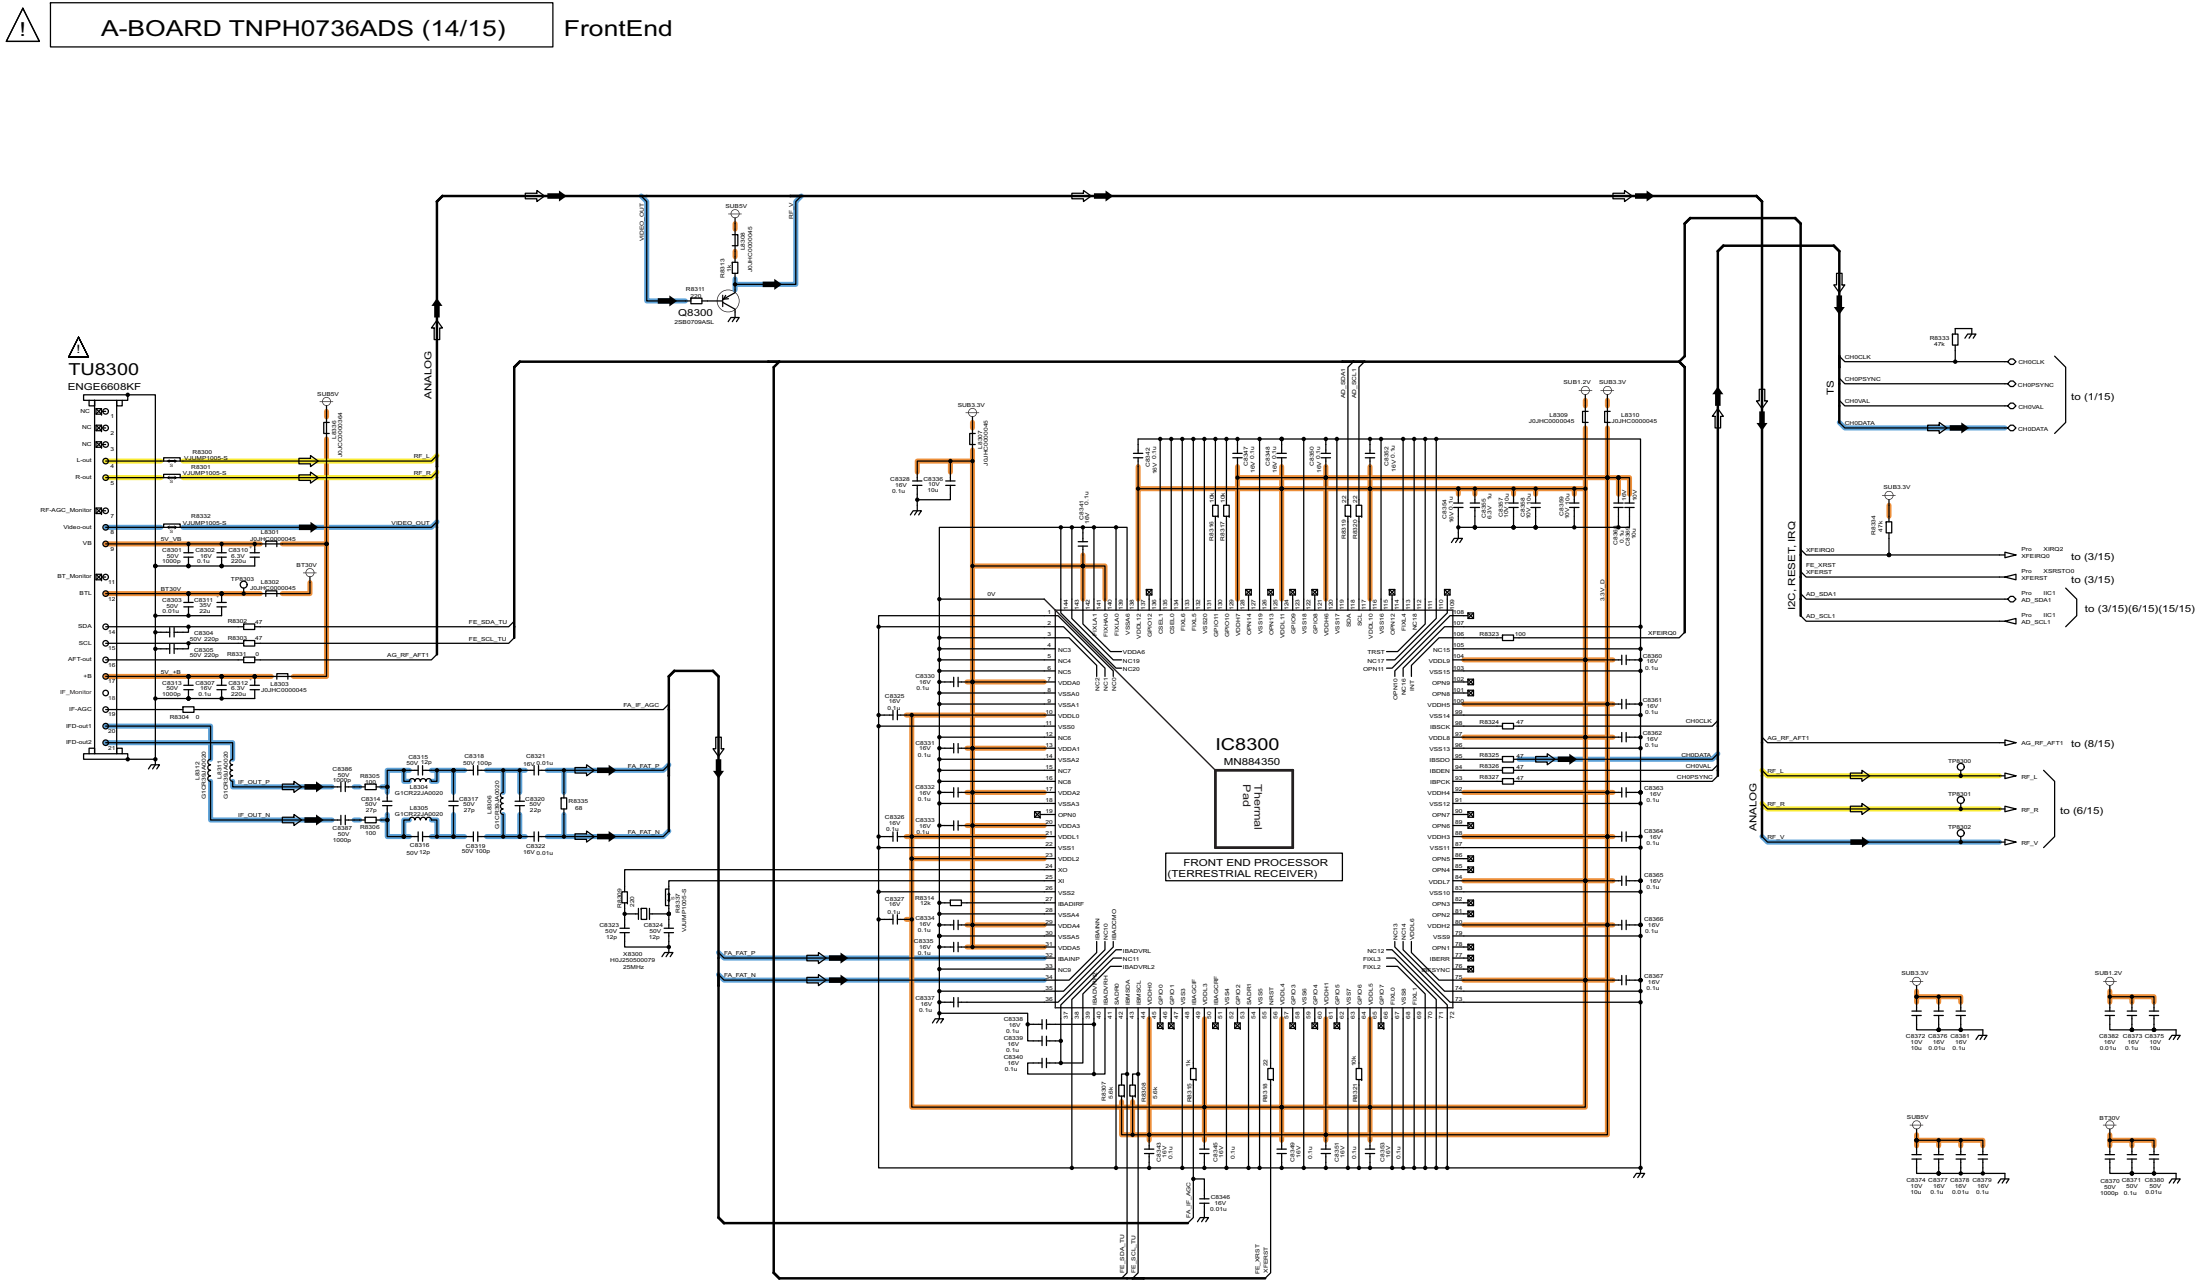


TH-65PZ850U
A-Board (14/15) Schematic Diagram

TH-65PZ850U
A-Board (14/15) Schematic Diagram


11.22. A-Board (15/15) Schematic Diagram

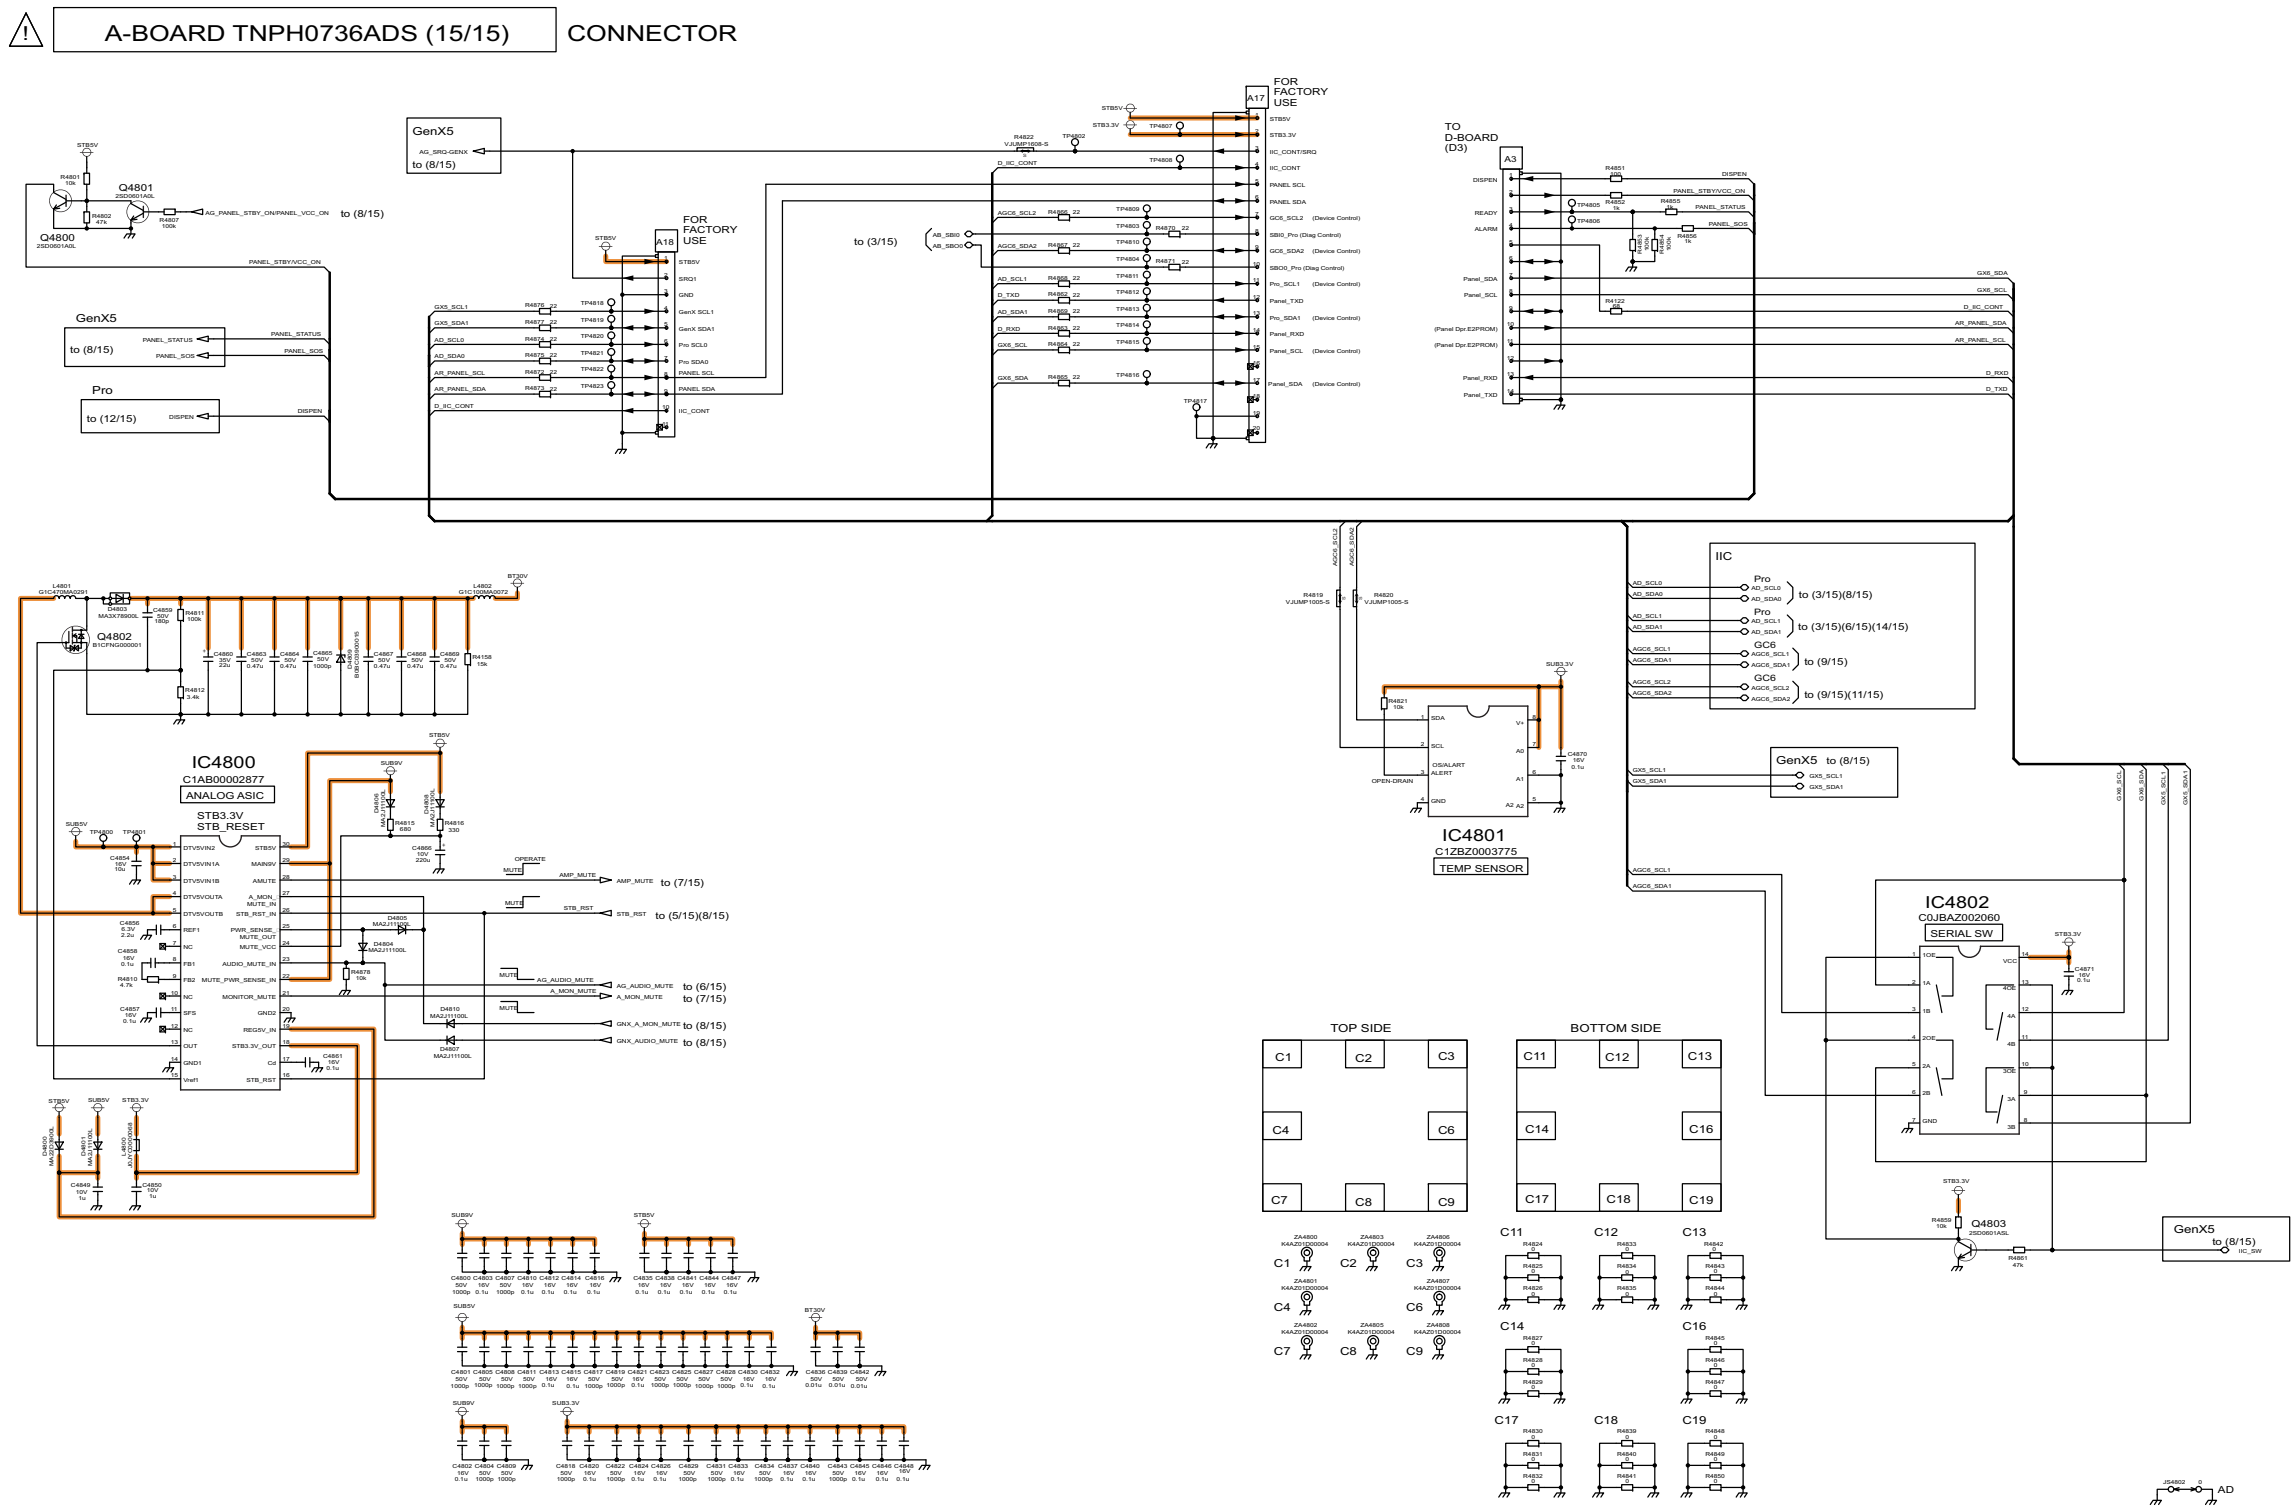


11.23. D-Board (1/7) Schematic Diagram

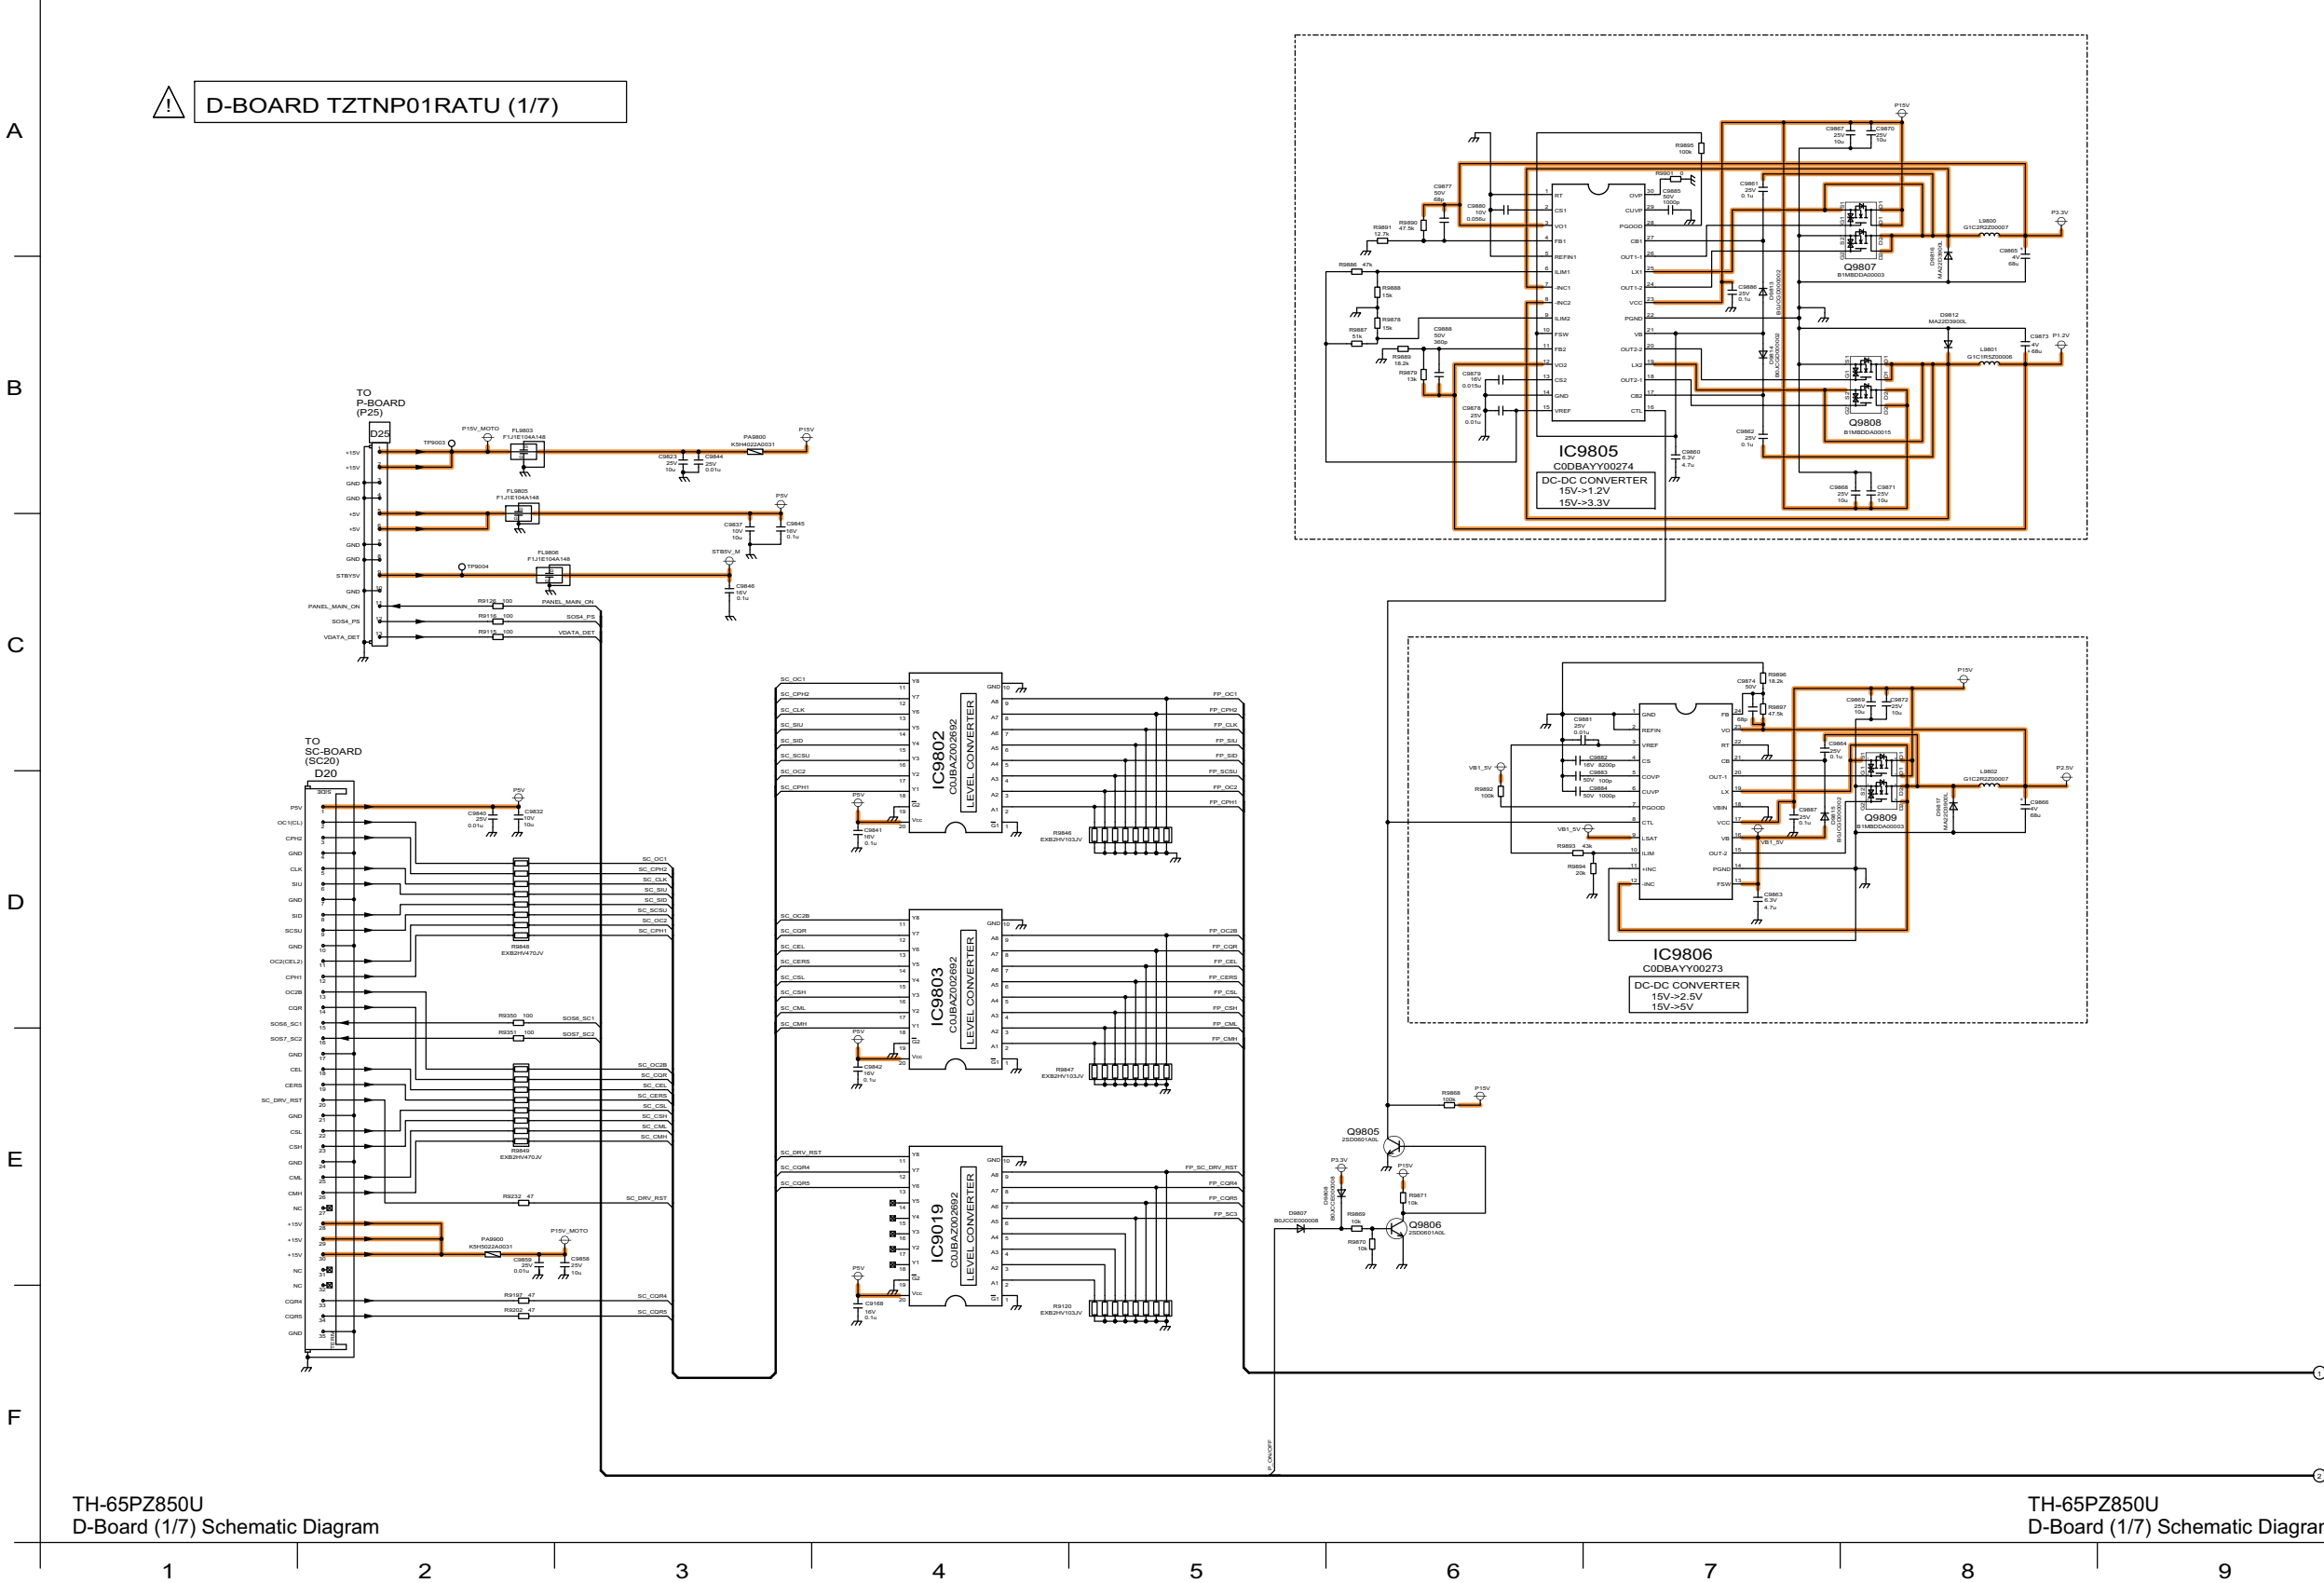

TH-65PZ850U
D-Board (2/7) Schematic Diagram




11.25. D-Board (3/7) Schematic Diagram

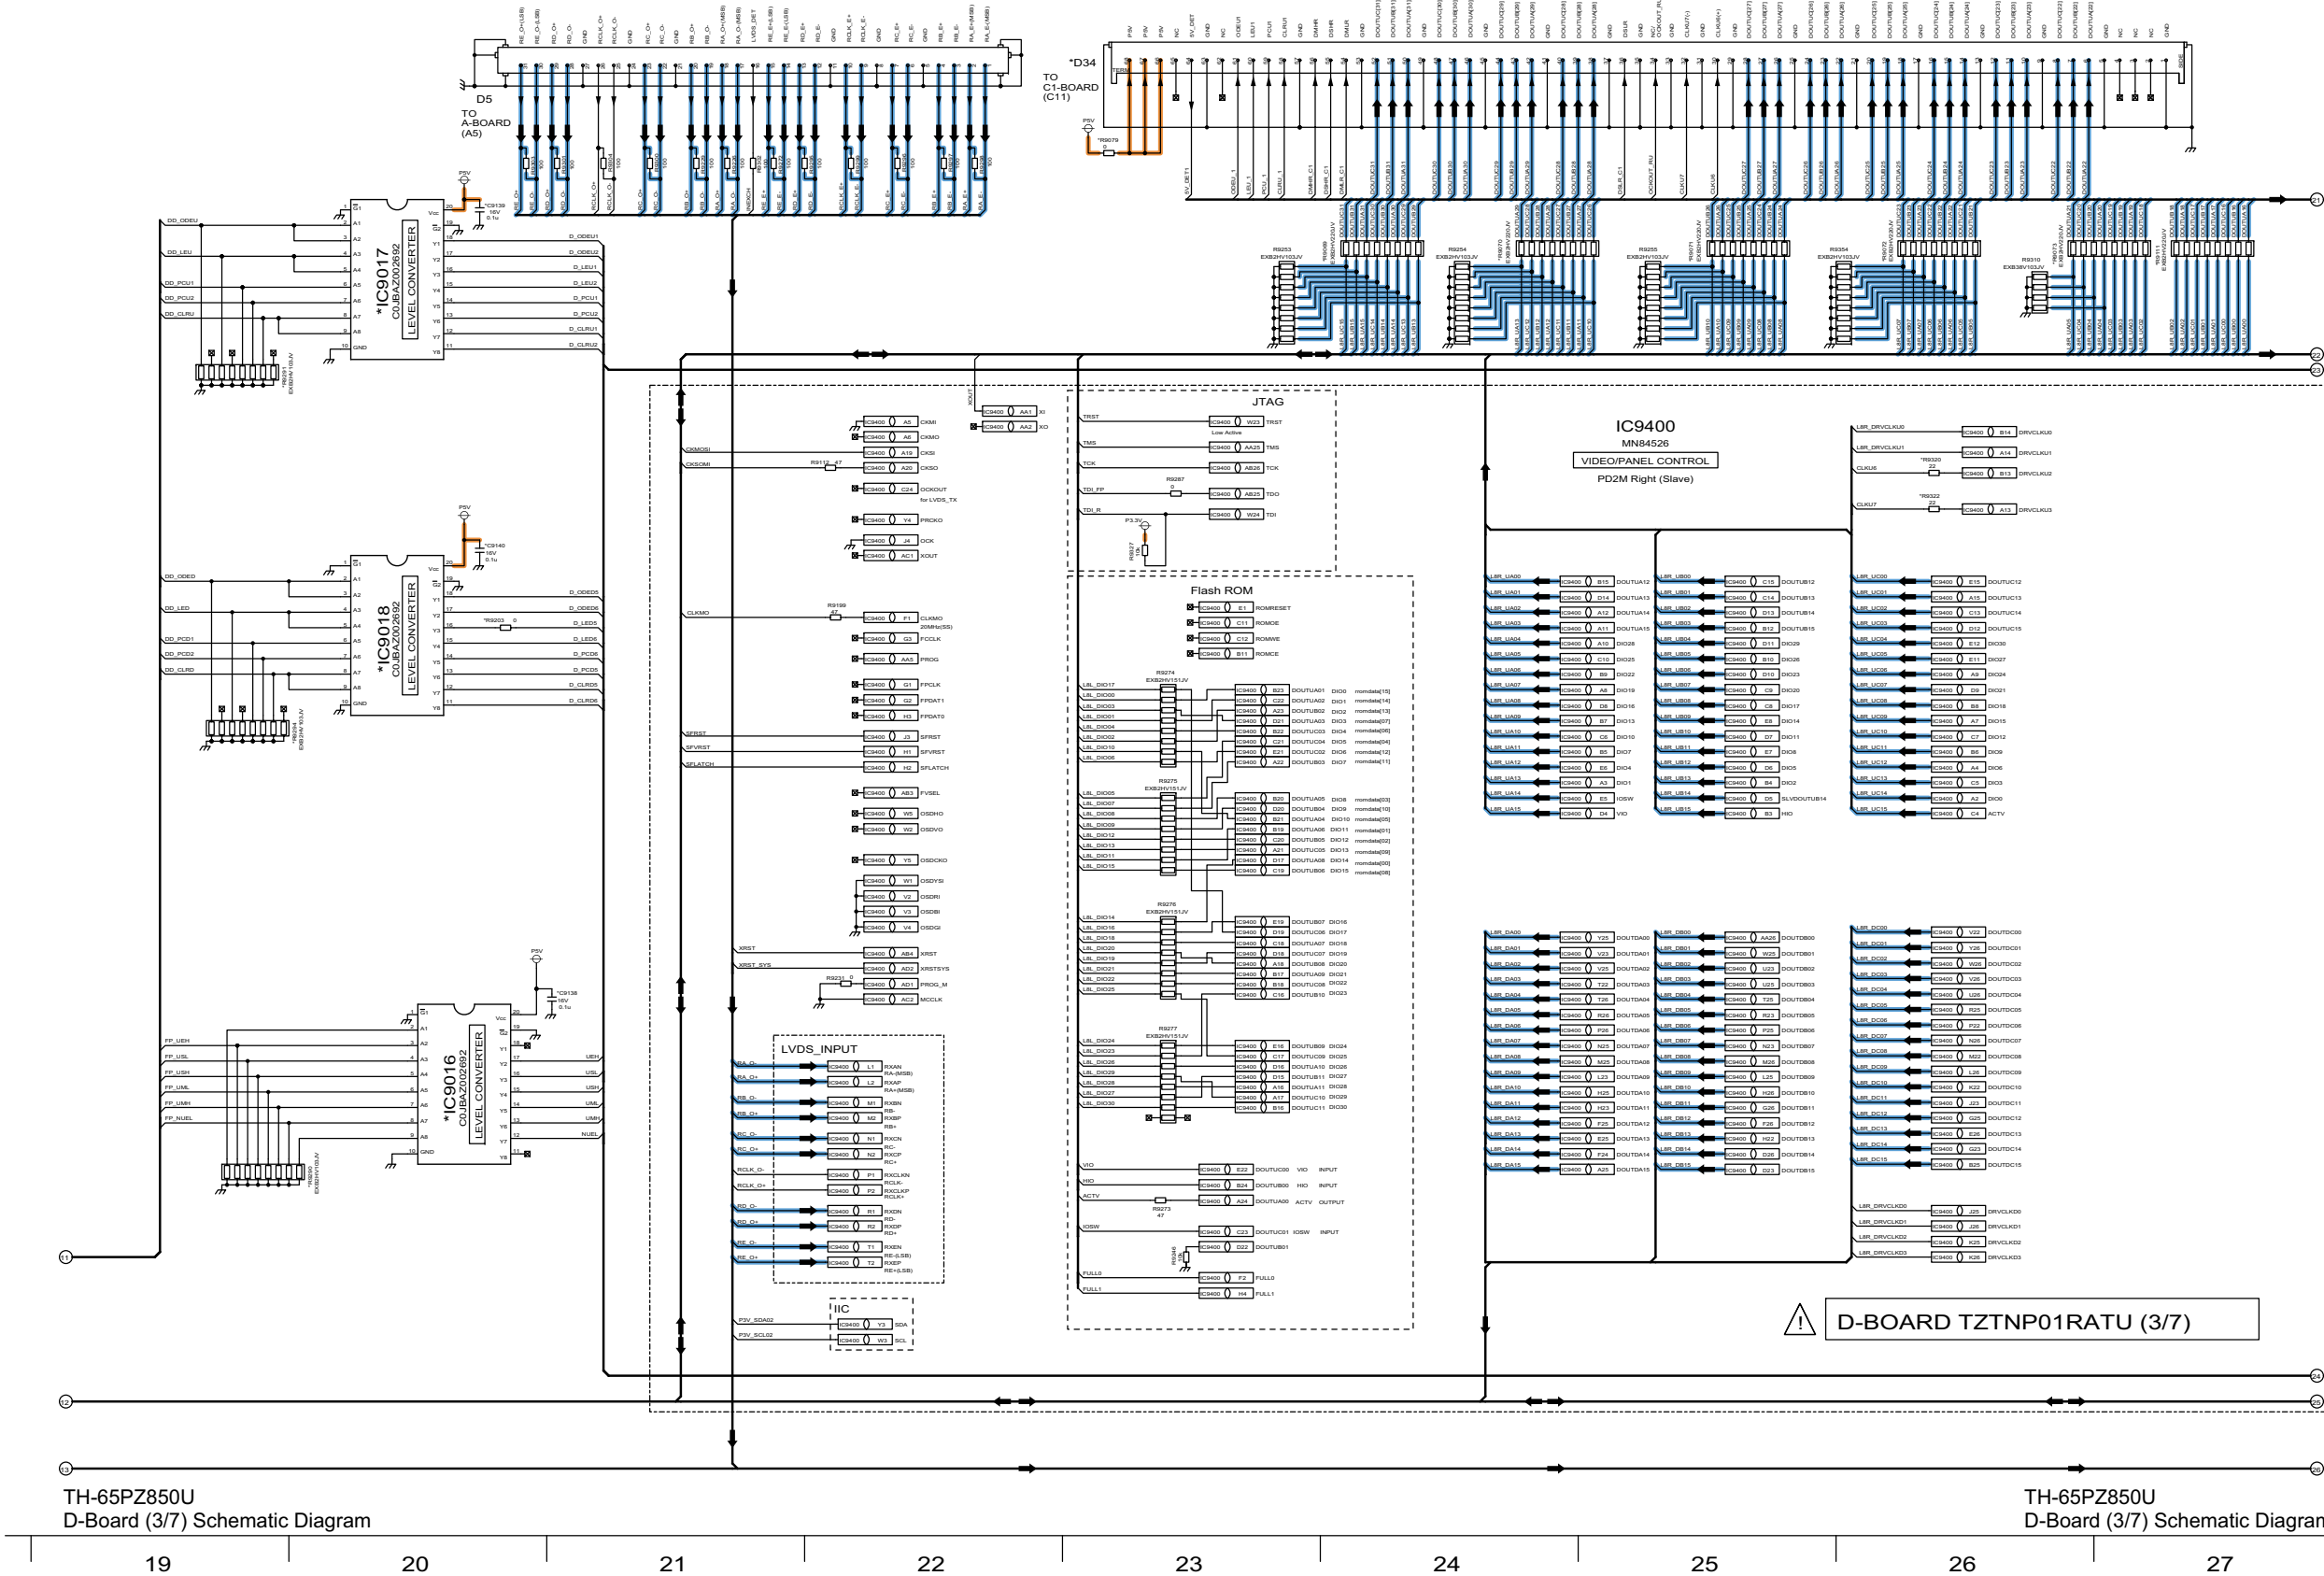


TH-65PZ850U
D-Board (4/7) Schematic Diagram

TH-65PZ850U
D-Board (4/7) Schematic Diagram

11.27. D-Board (5/7) Schematic Diagram

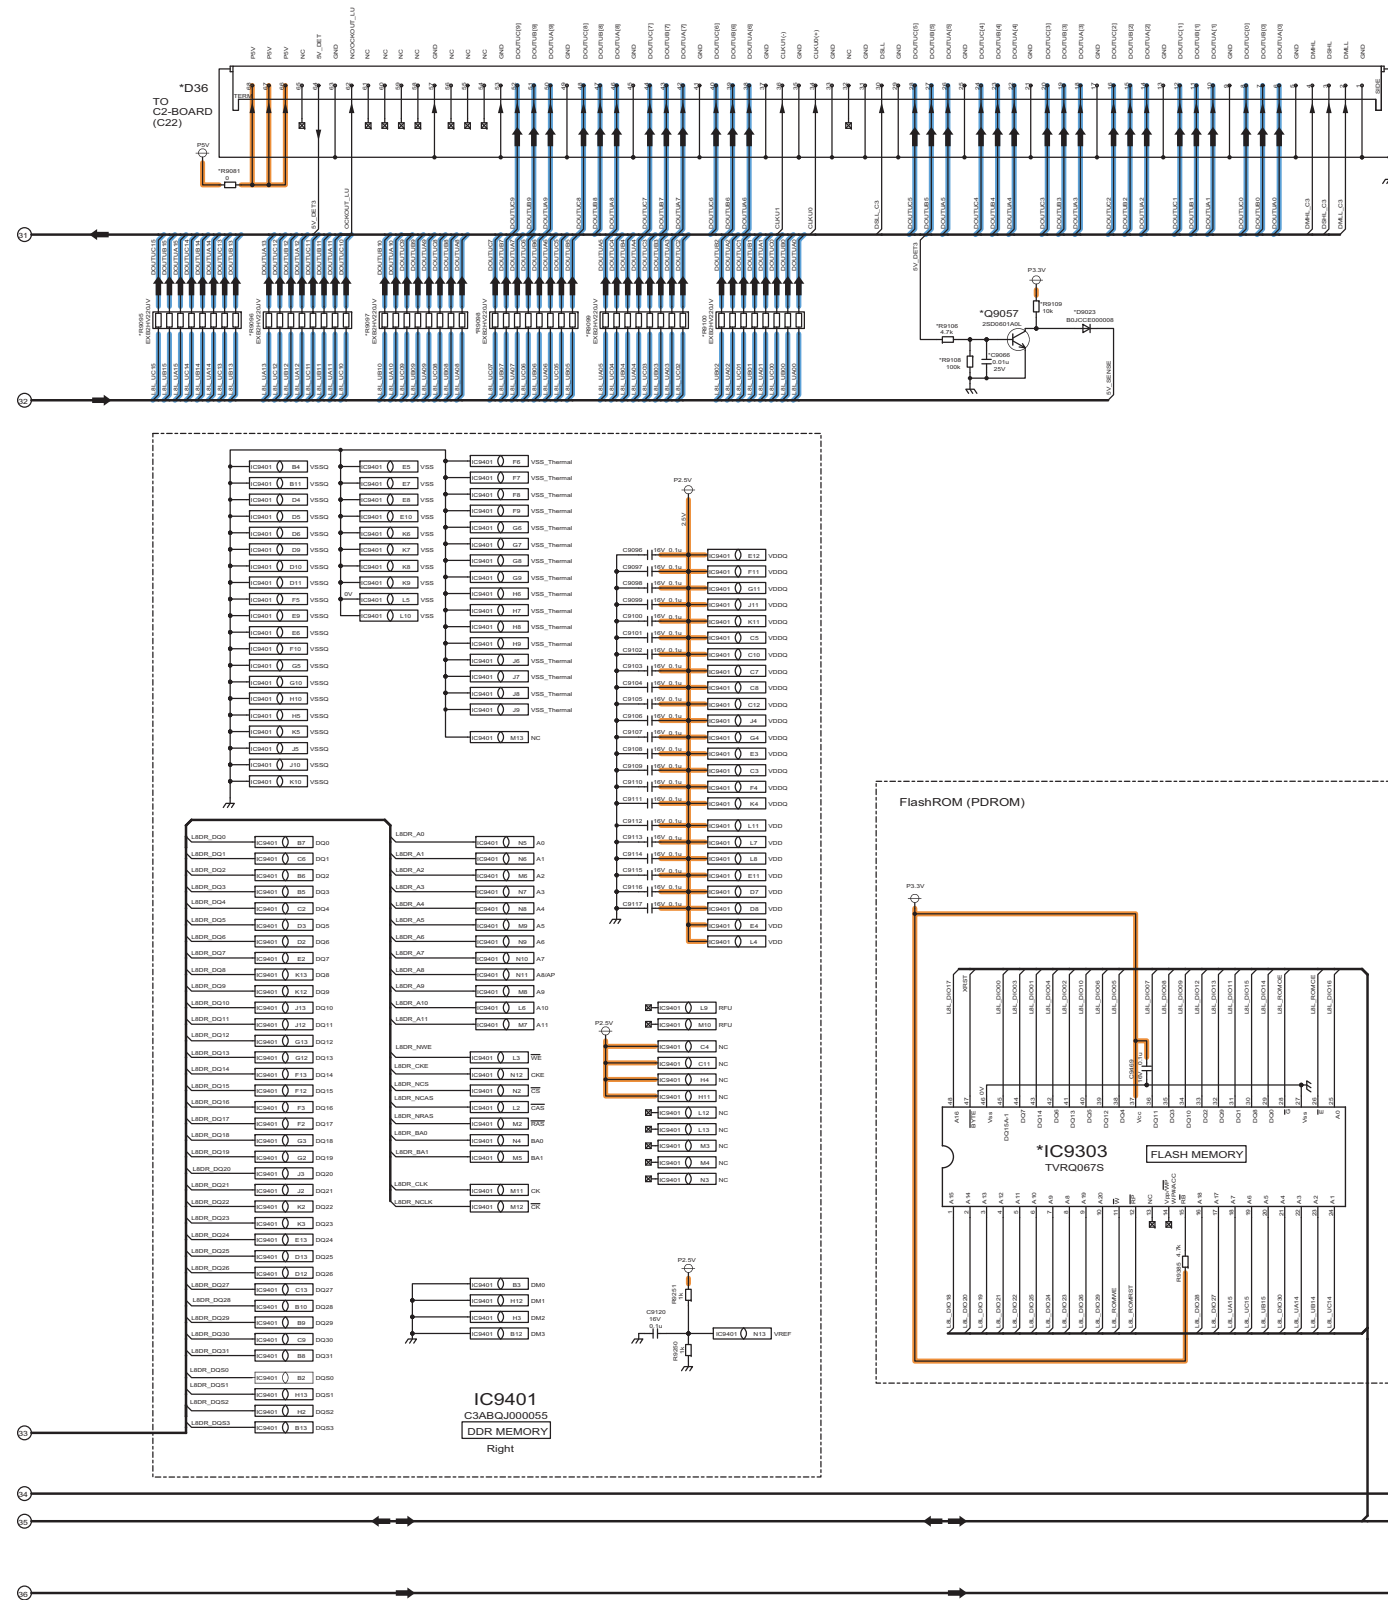


TH-65PZ850U D-Board (5/7) Schematic Diagram

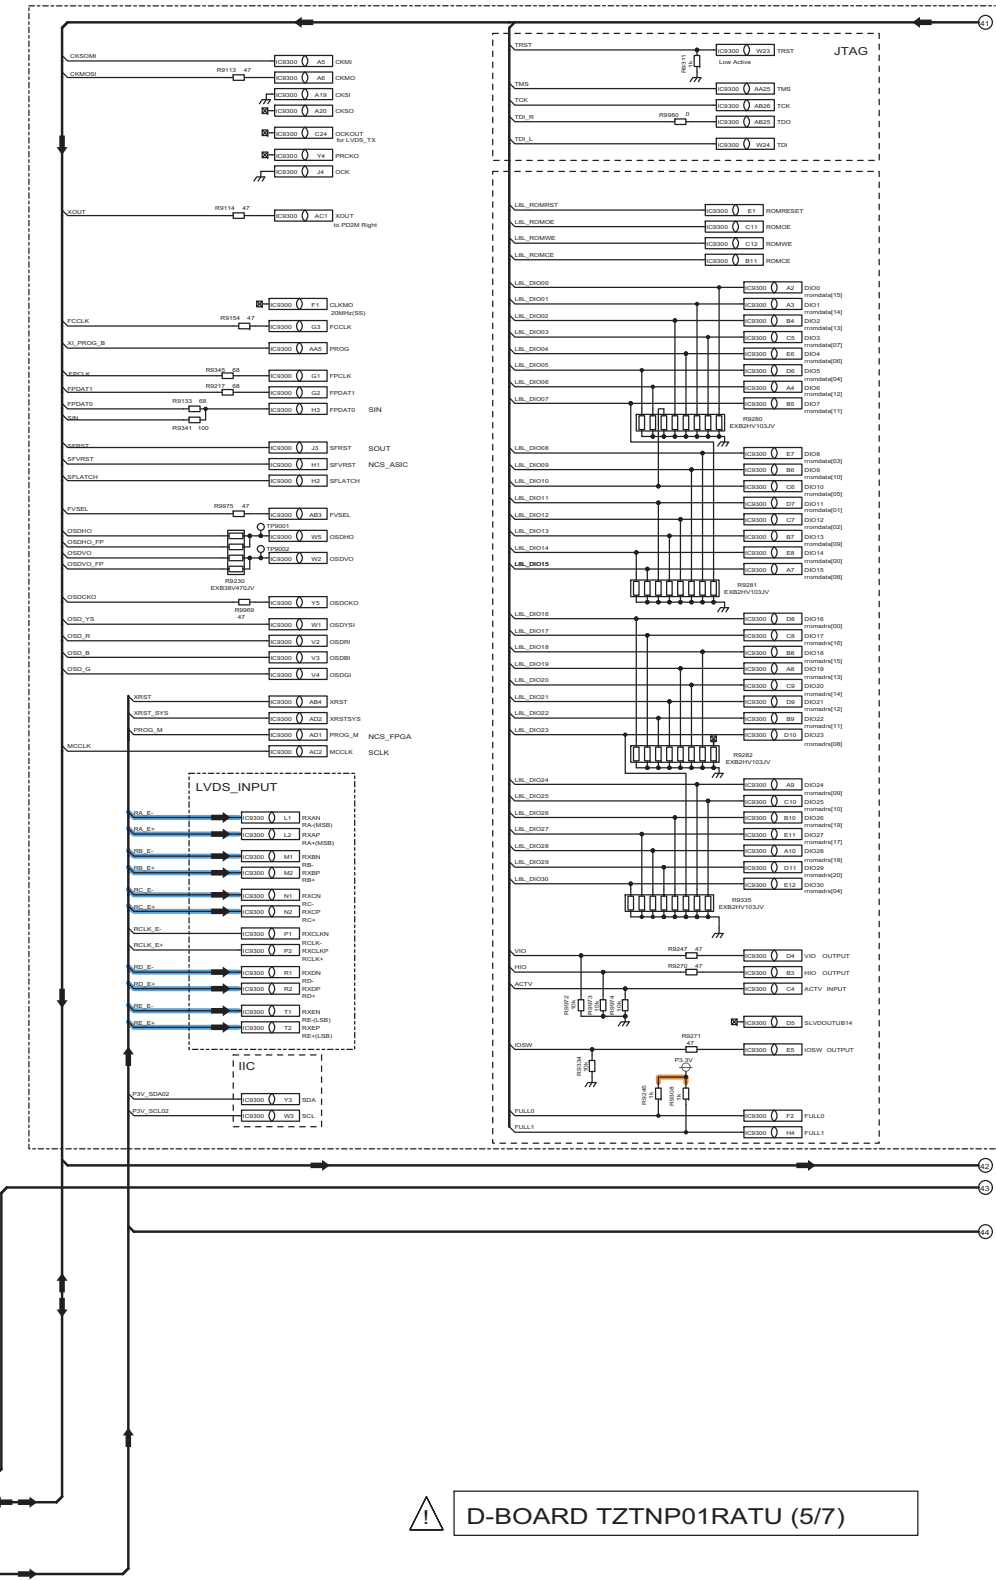


TH-65PZ850U
D-Board (5/7) Schematic Diagram


11.28. D-Board (6/7) Schematic Diagram

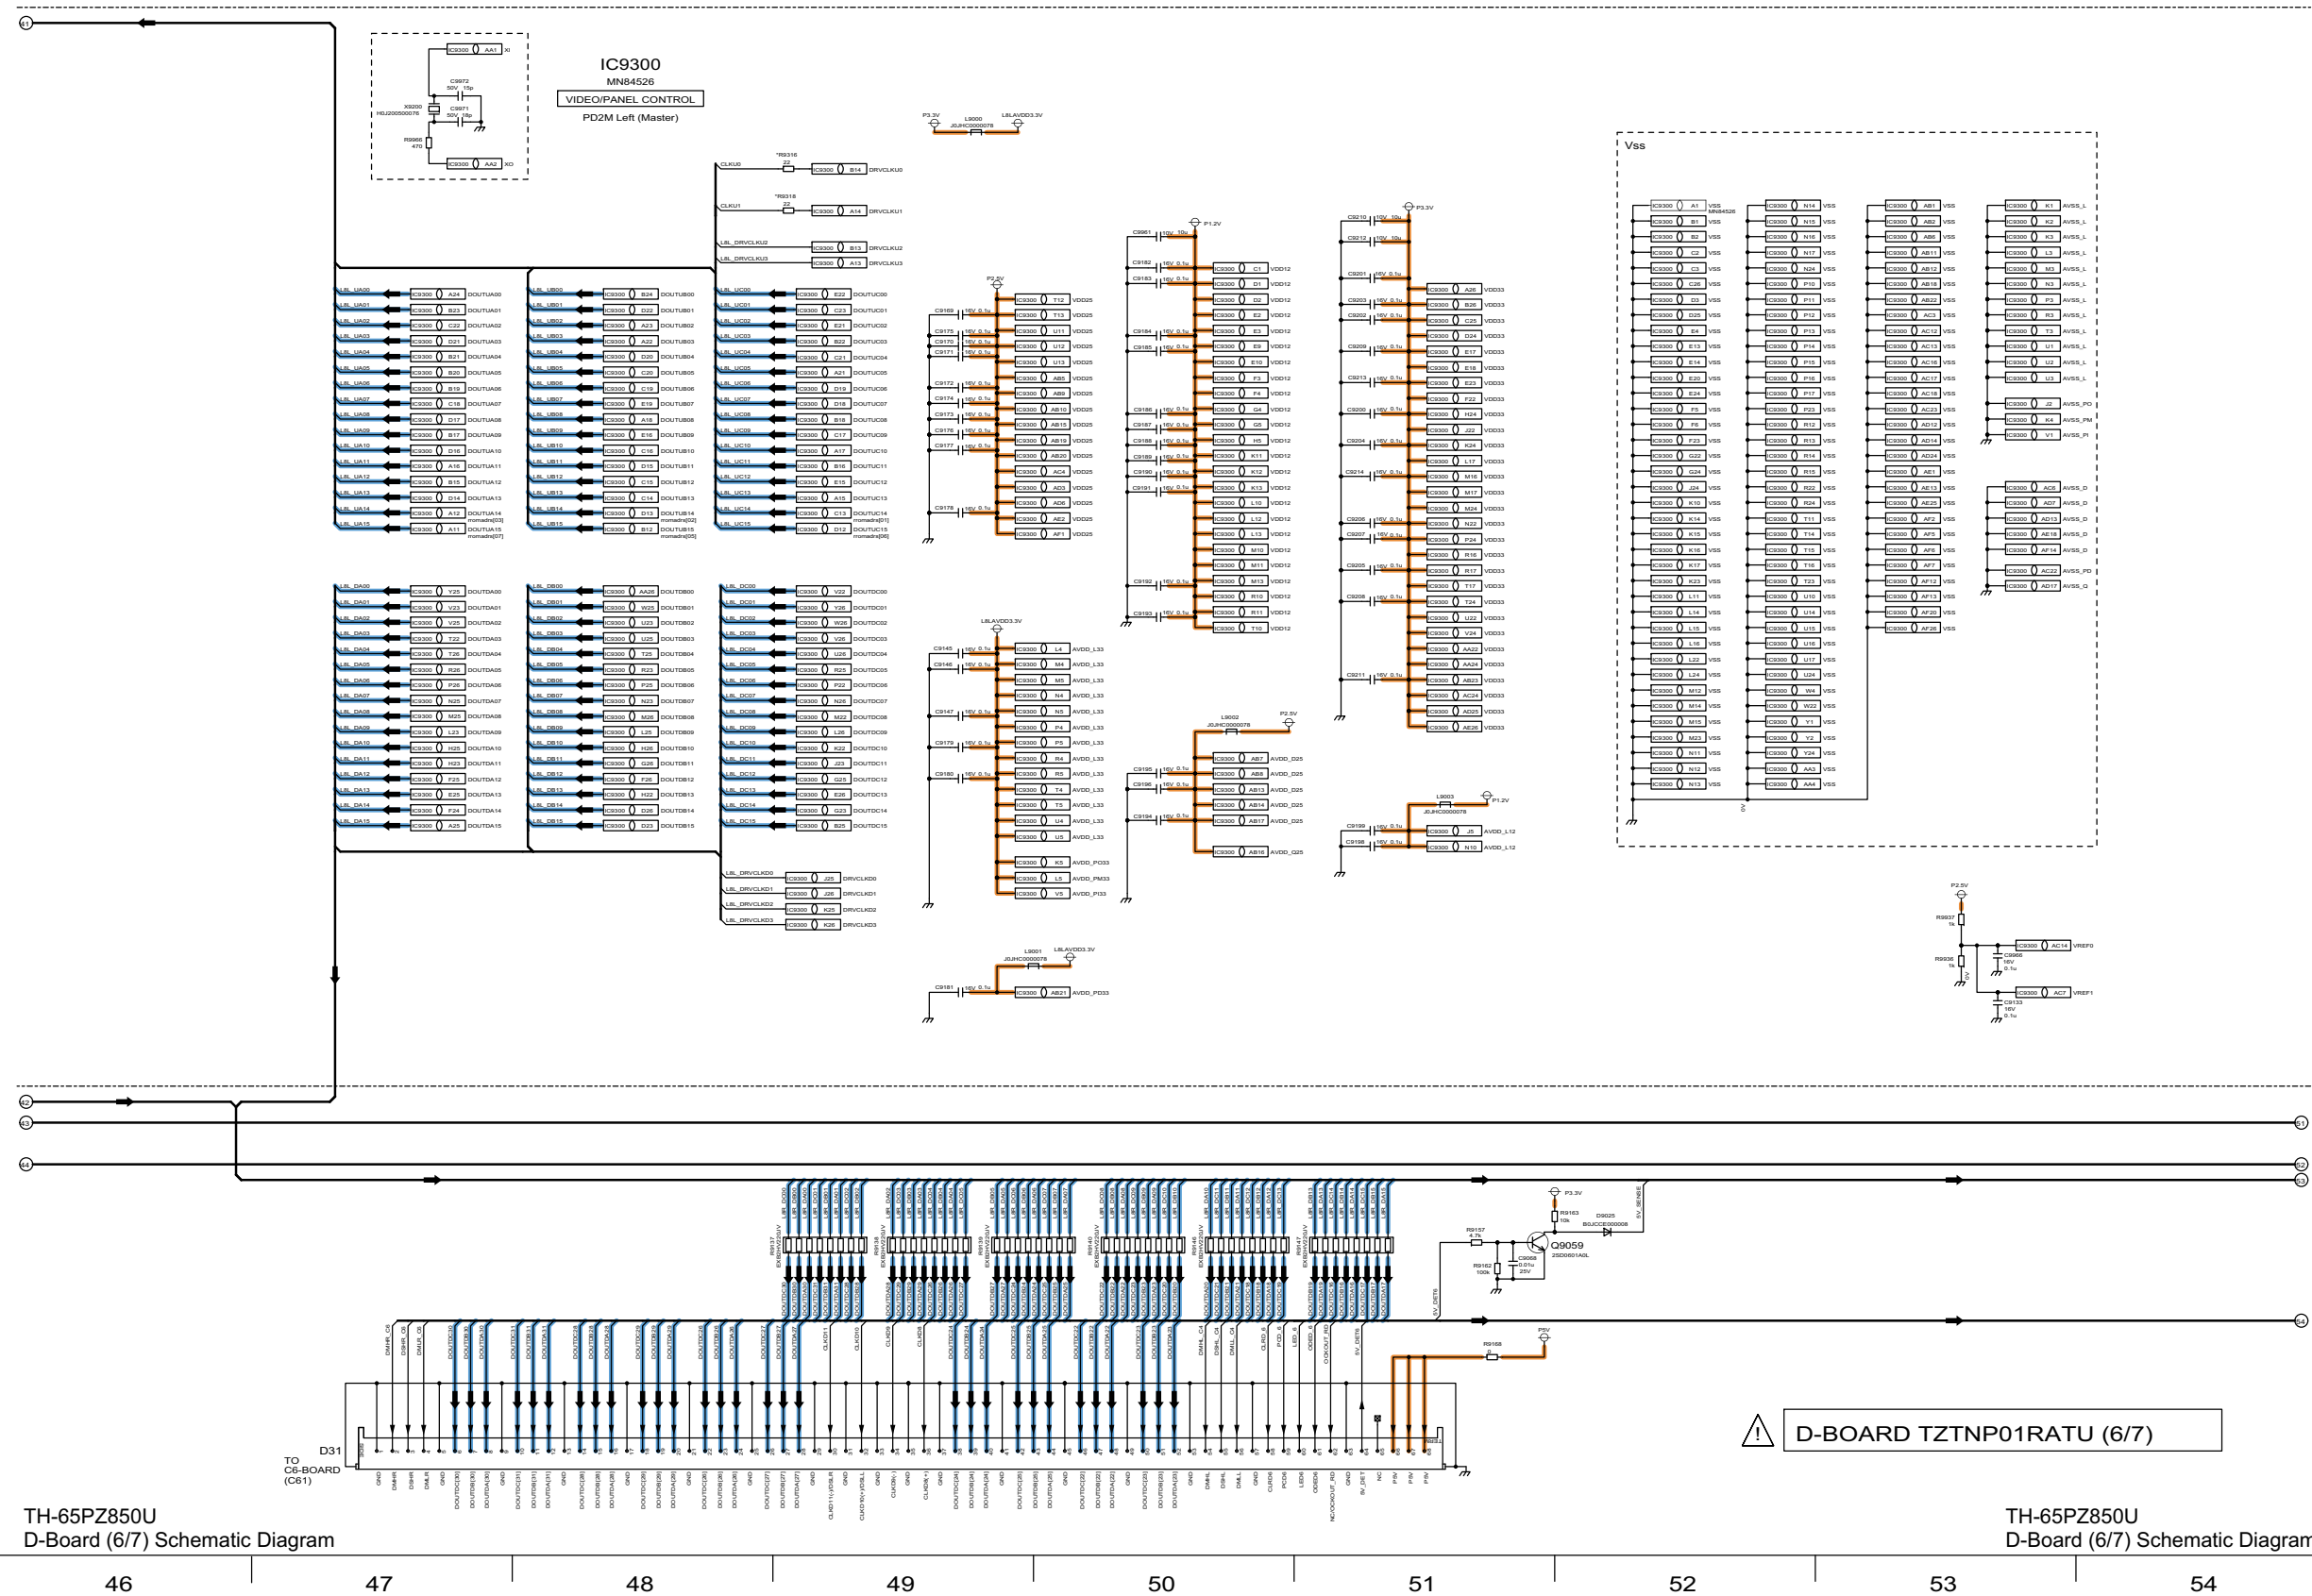

11.29. D-Board (7/7) Schematic Diagram

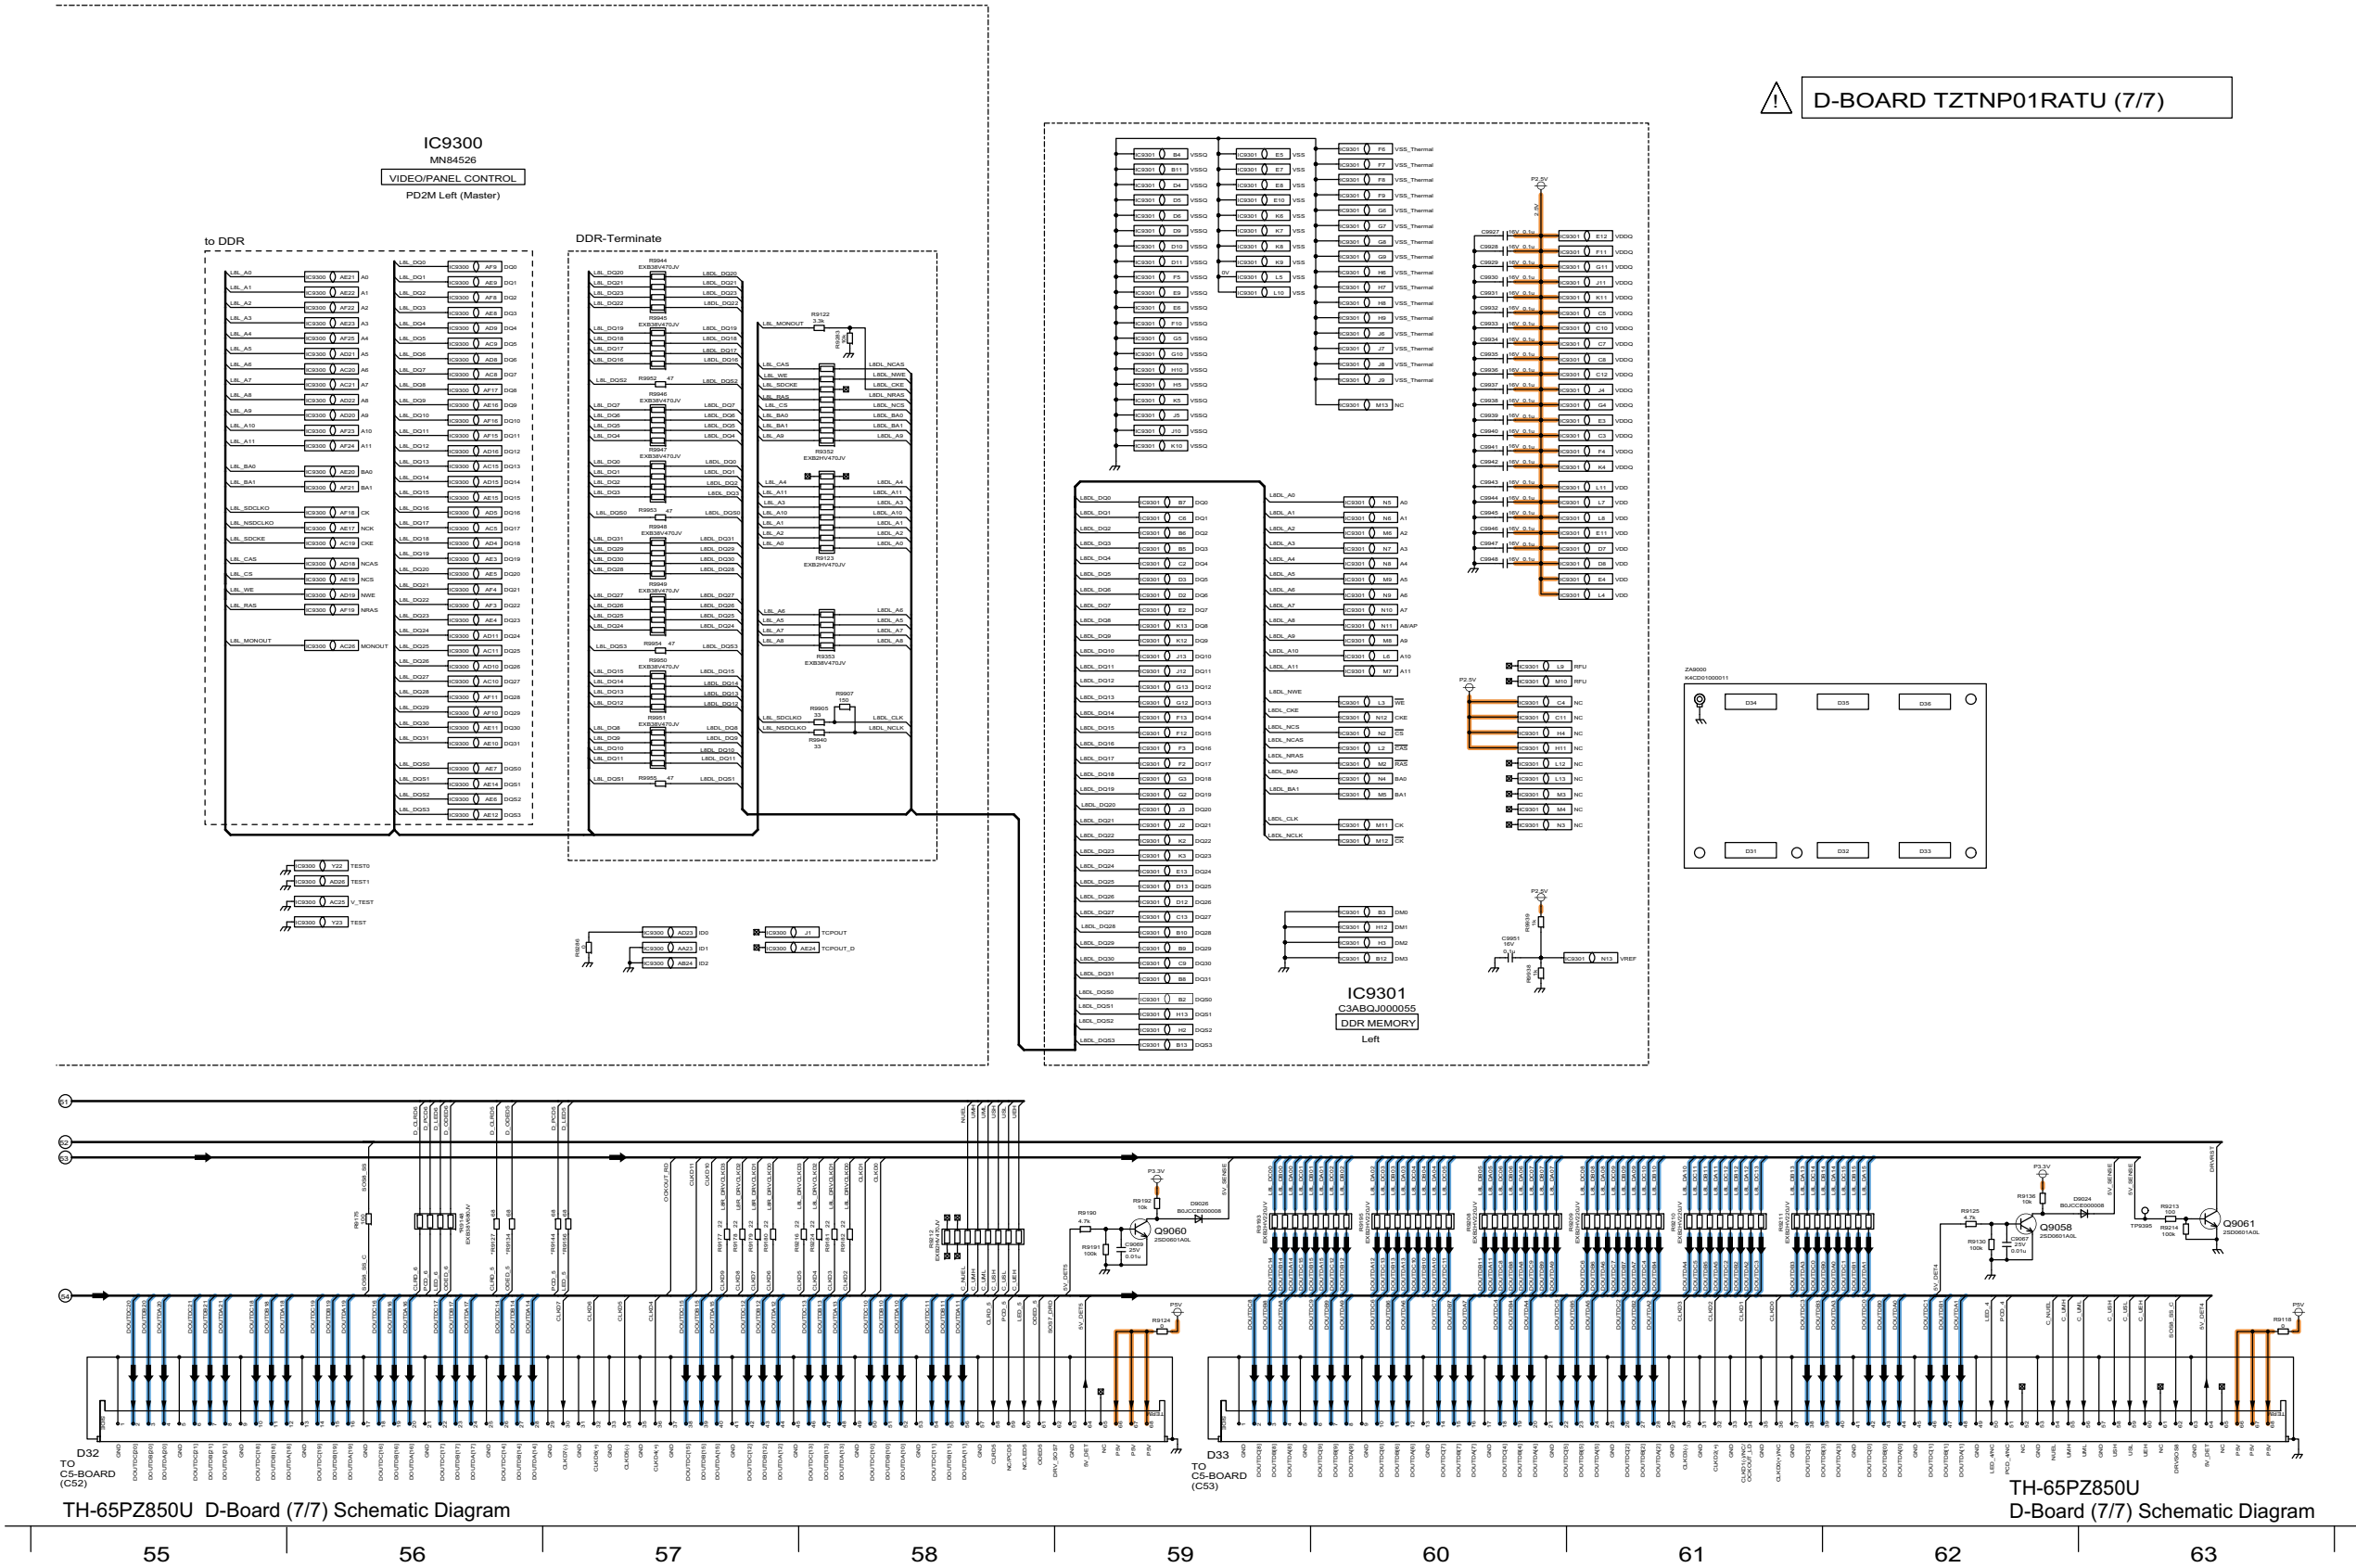


11.30. C1-Board (1/3) Schematic Diagram

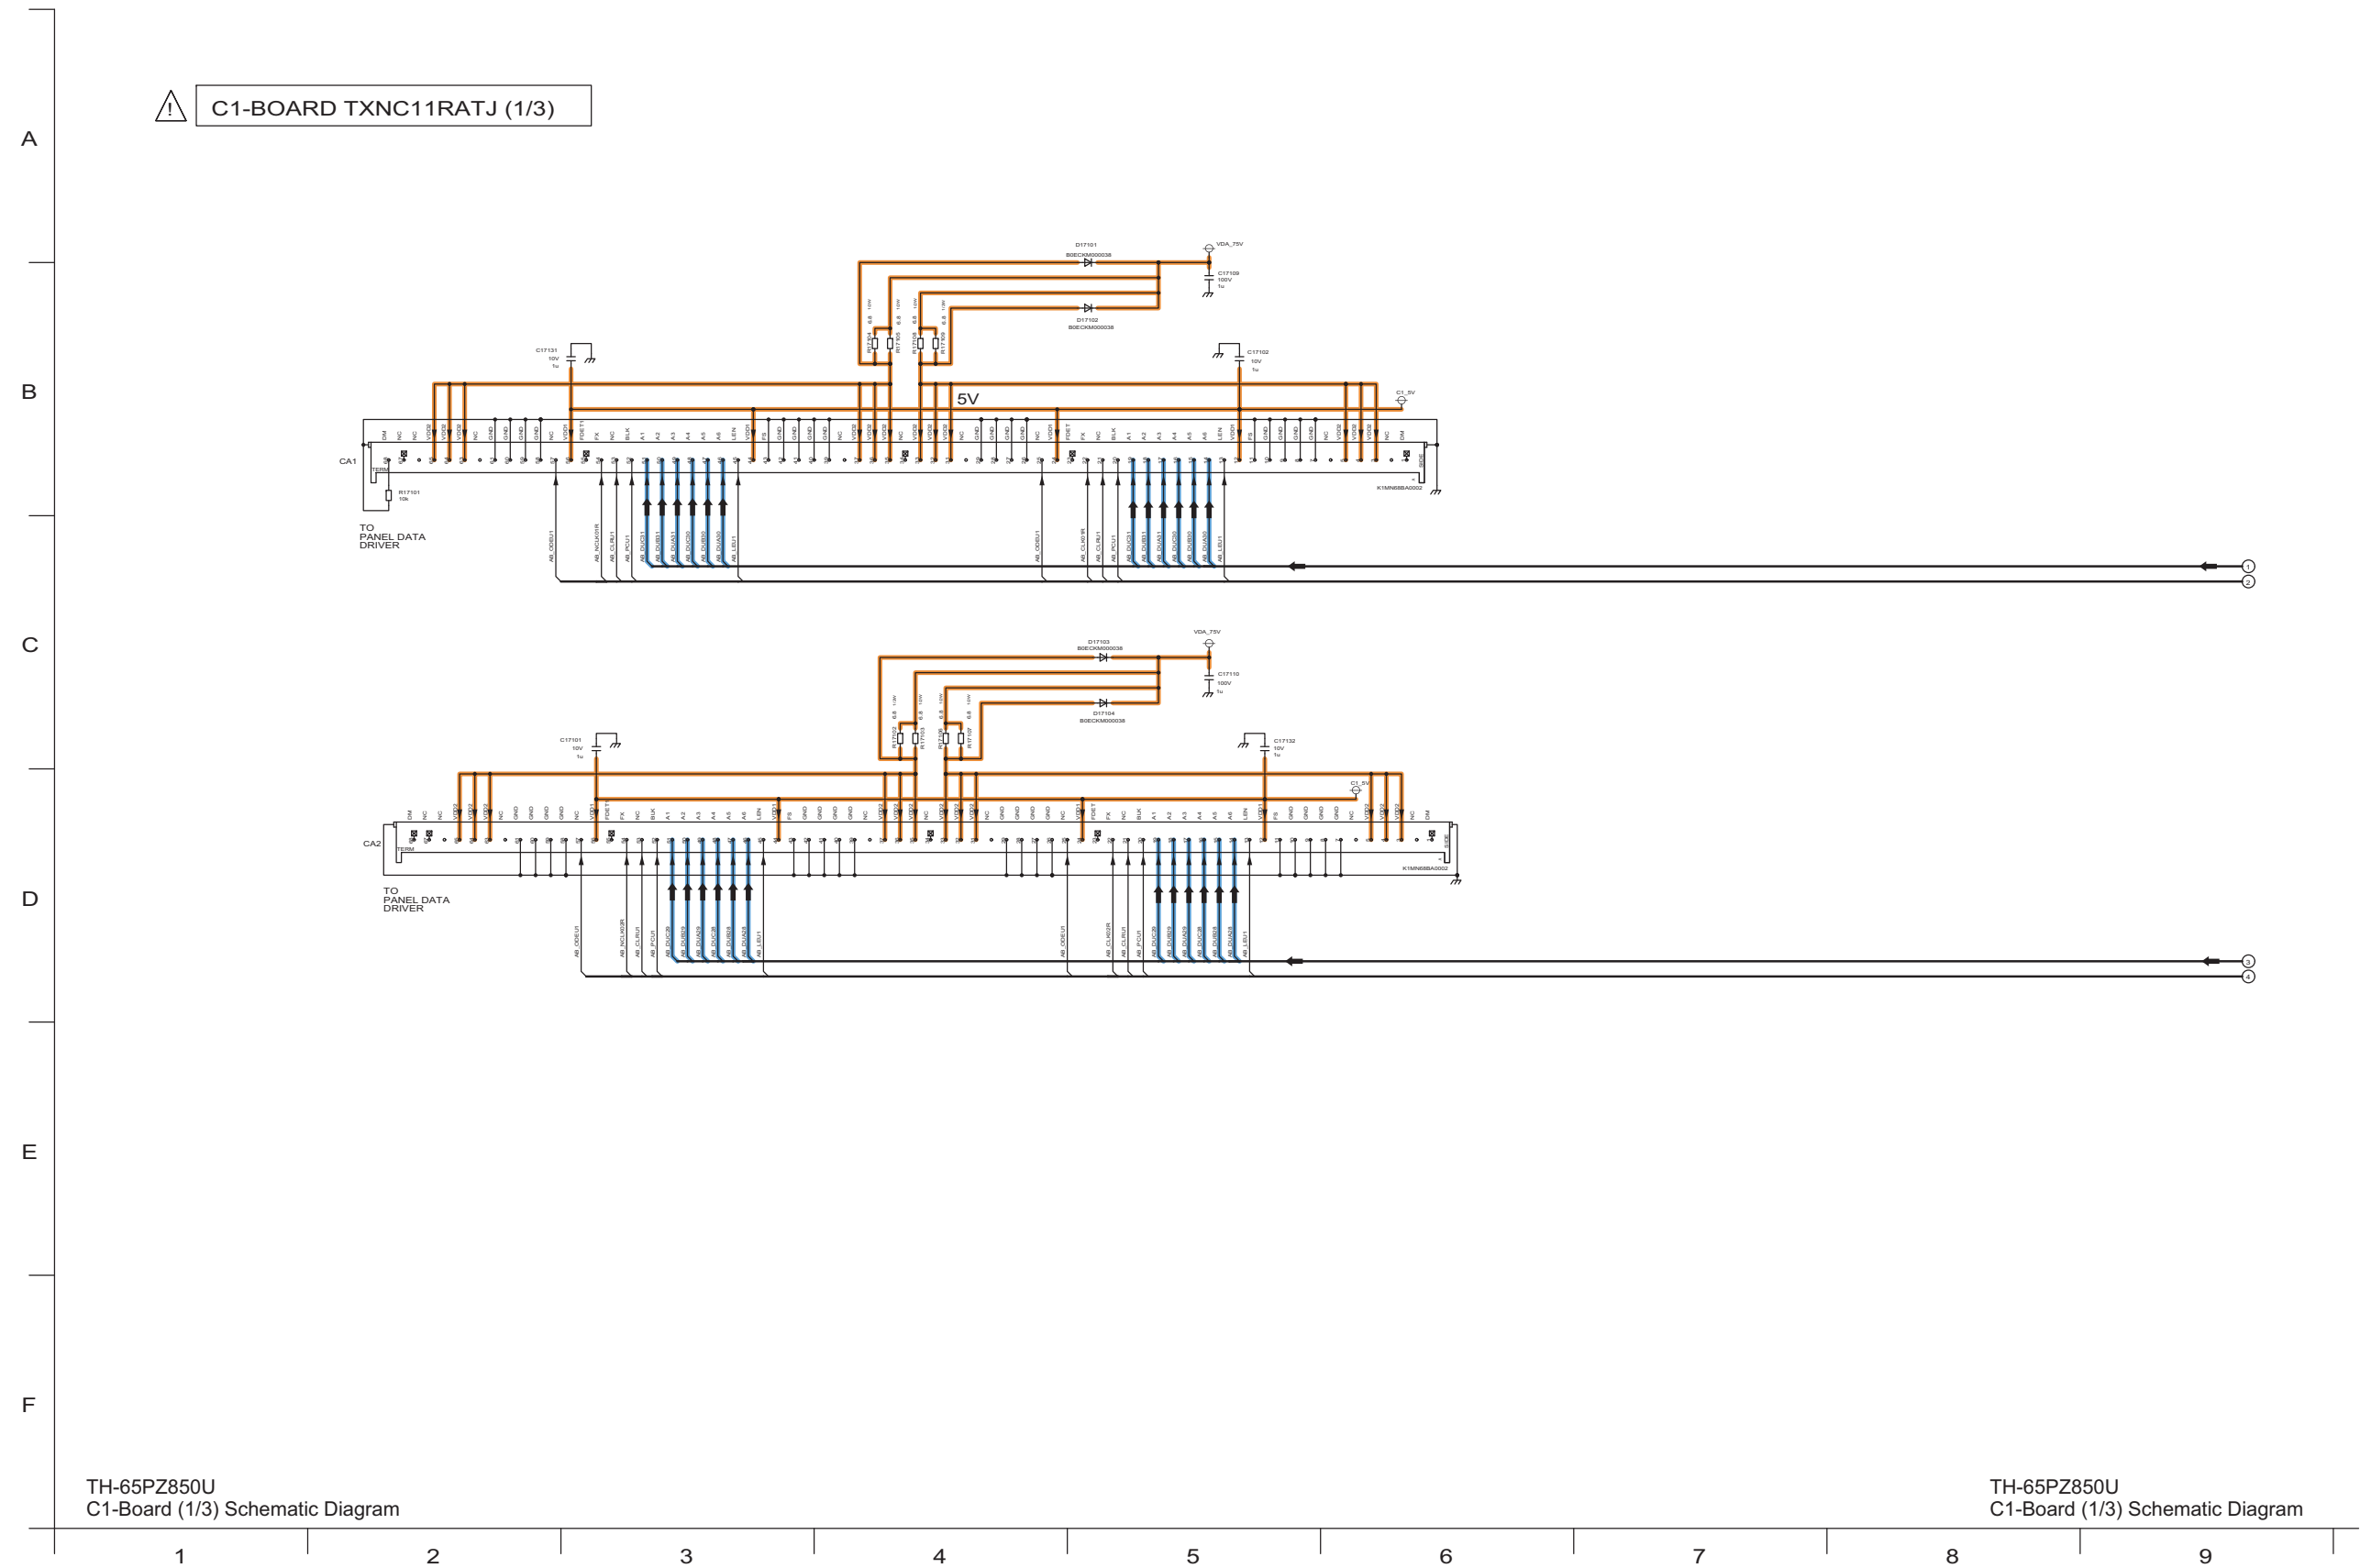

11.31. C1-Board (2/3) Schematic Diagram


 C1-BOARD TXNC11RATJ (2/3)

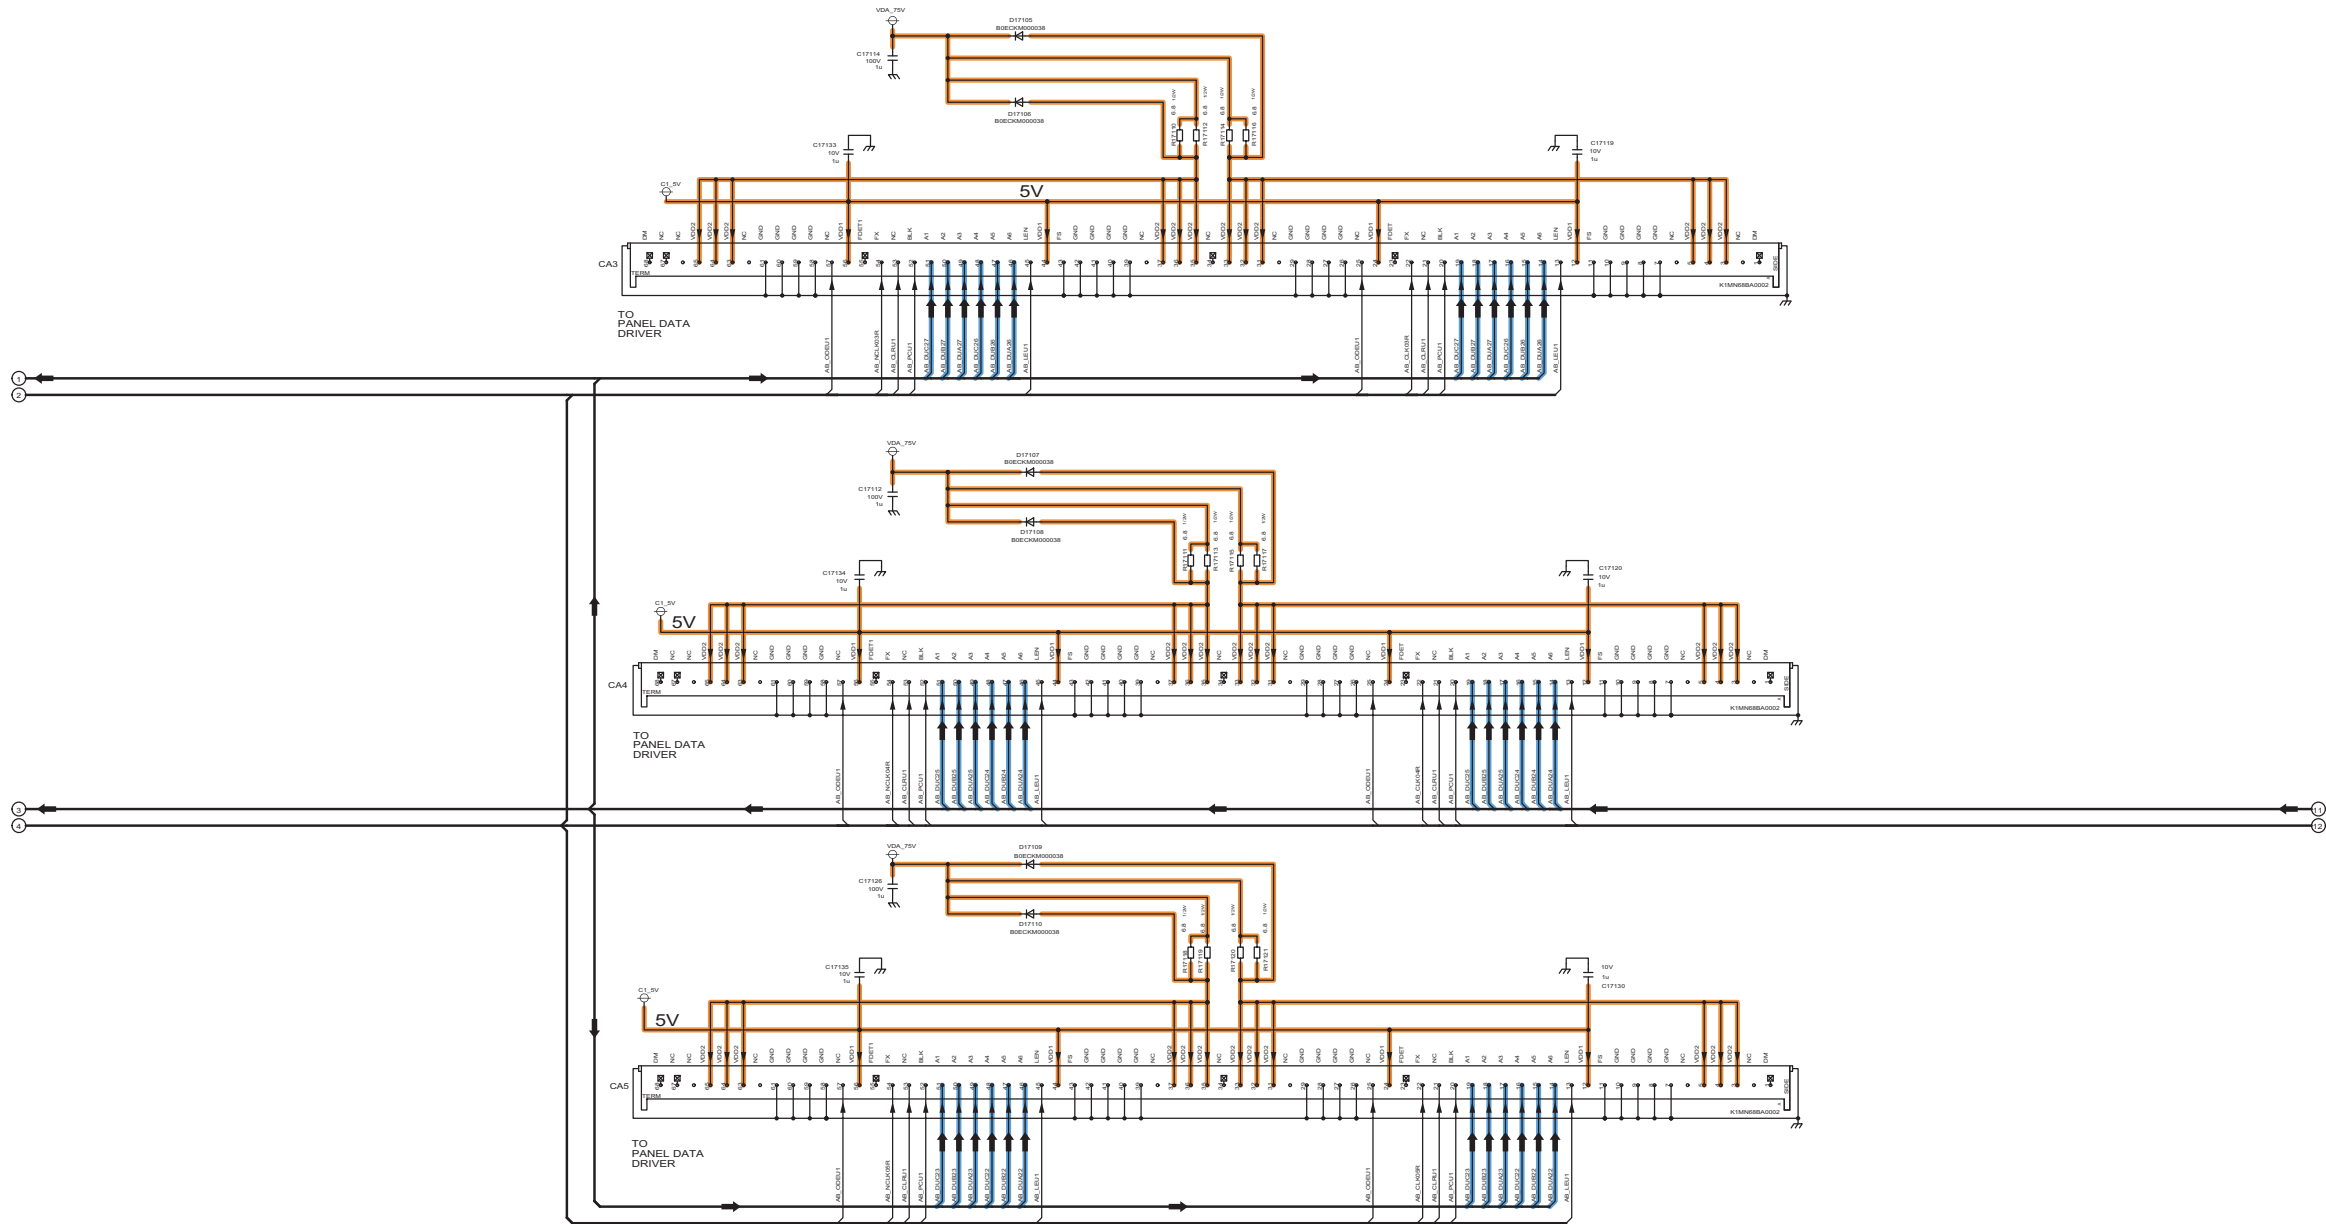


TH-65PZ850U C1-Board (2/3) Schematic Diagram

TH-65PZ850U
C1-Board (2/3) Schematic Diagram


 C1-BOARD TXNC11RATJ (3/3)




11.33. C2-Board (1/3) Schematic Diagram

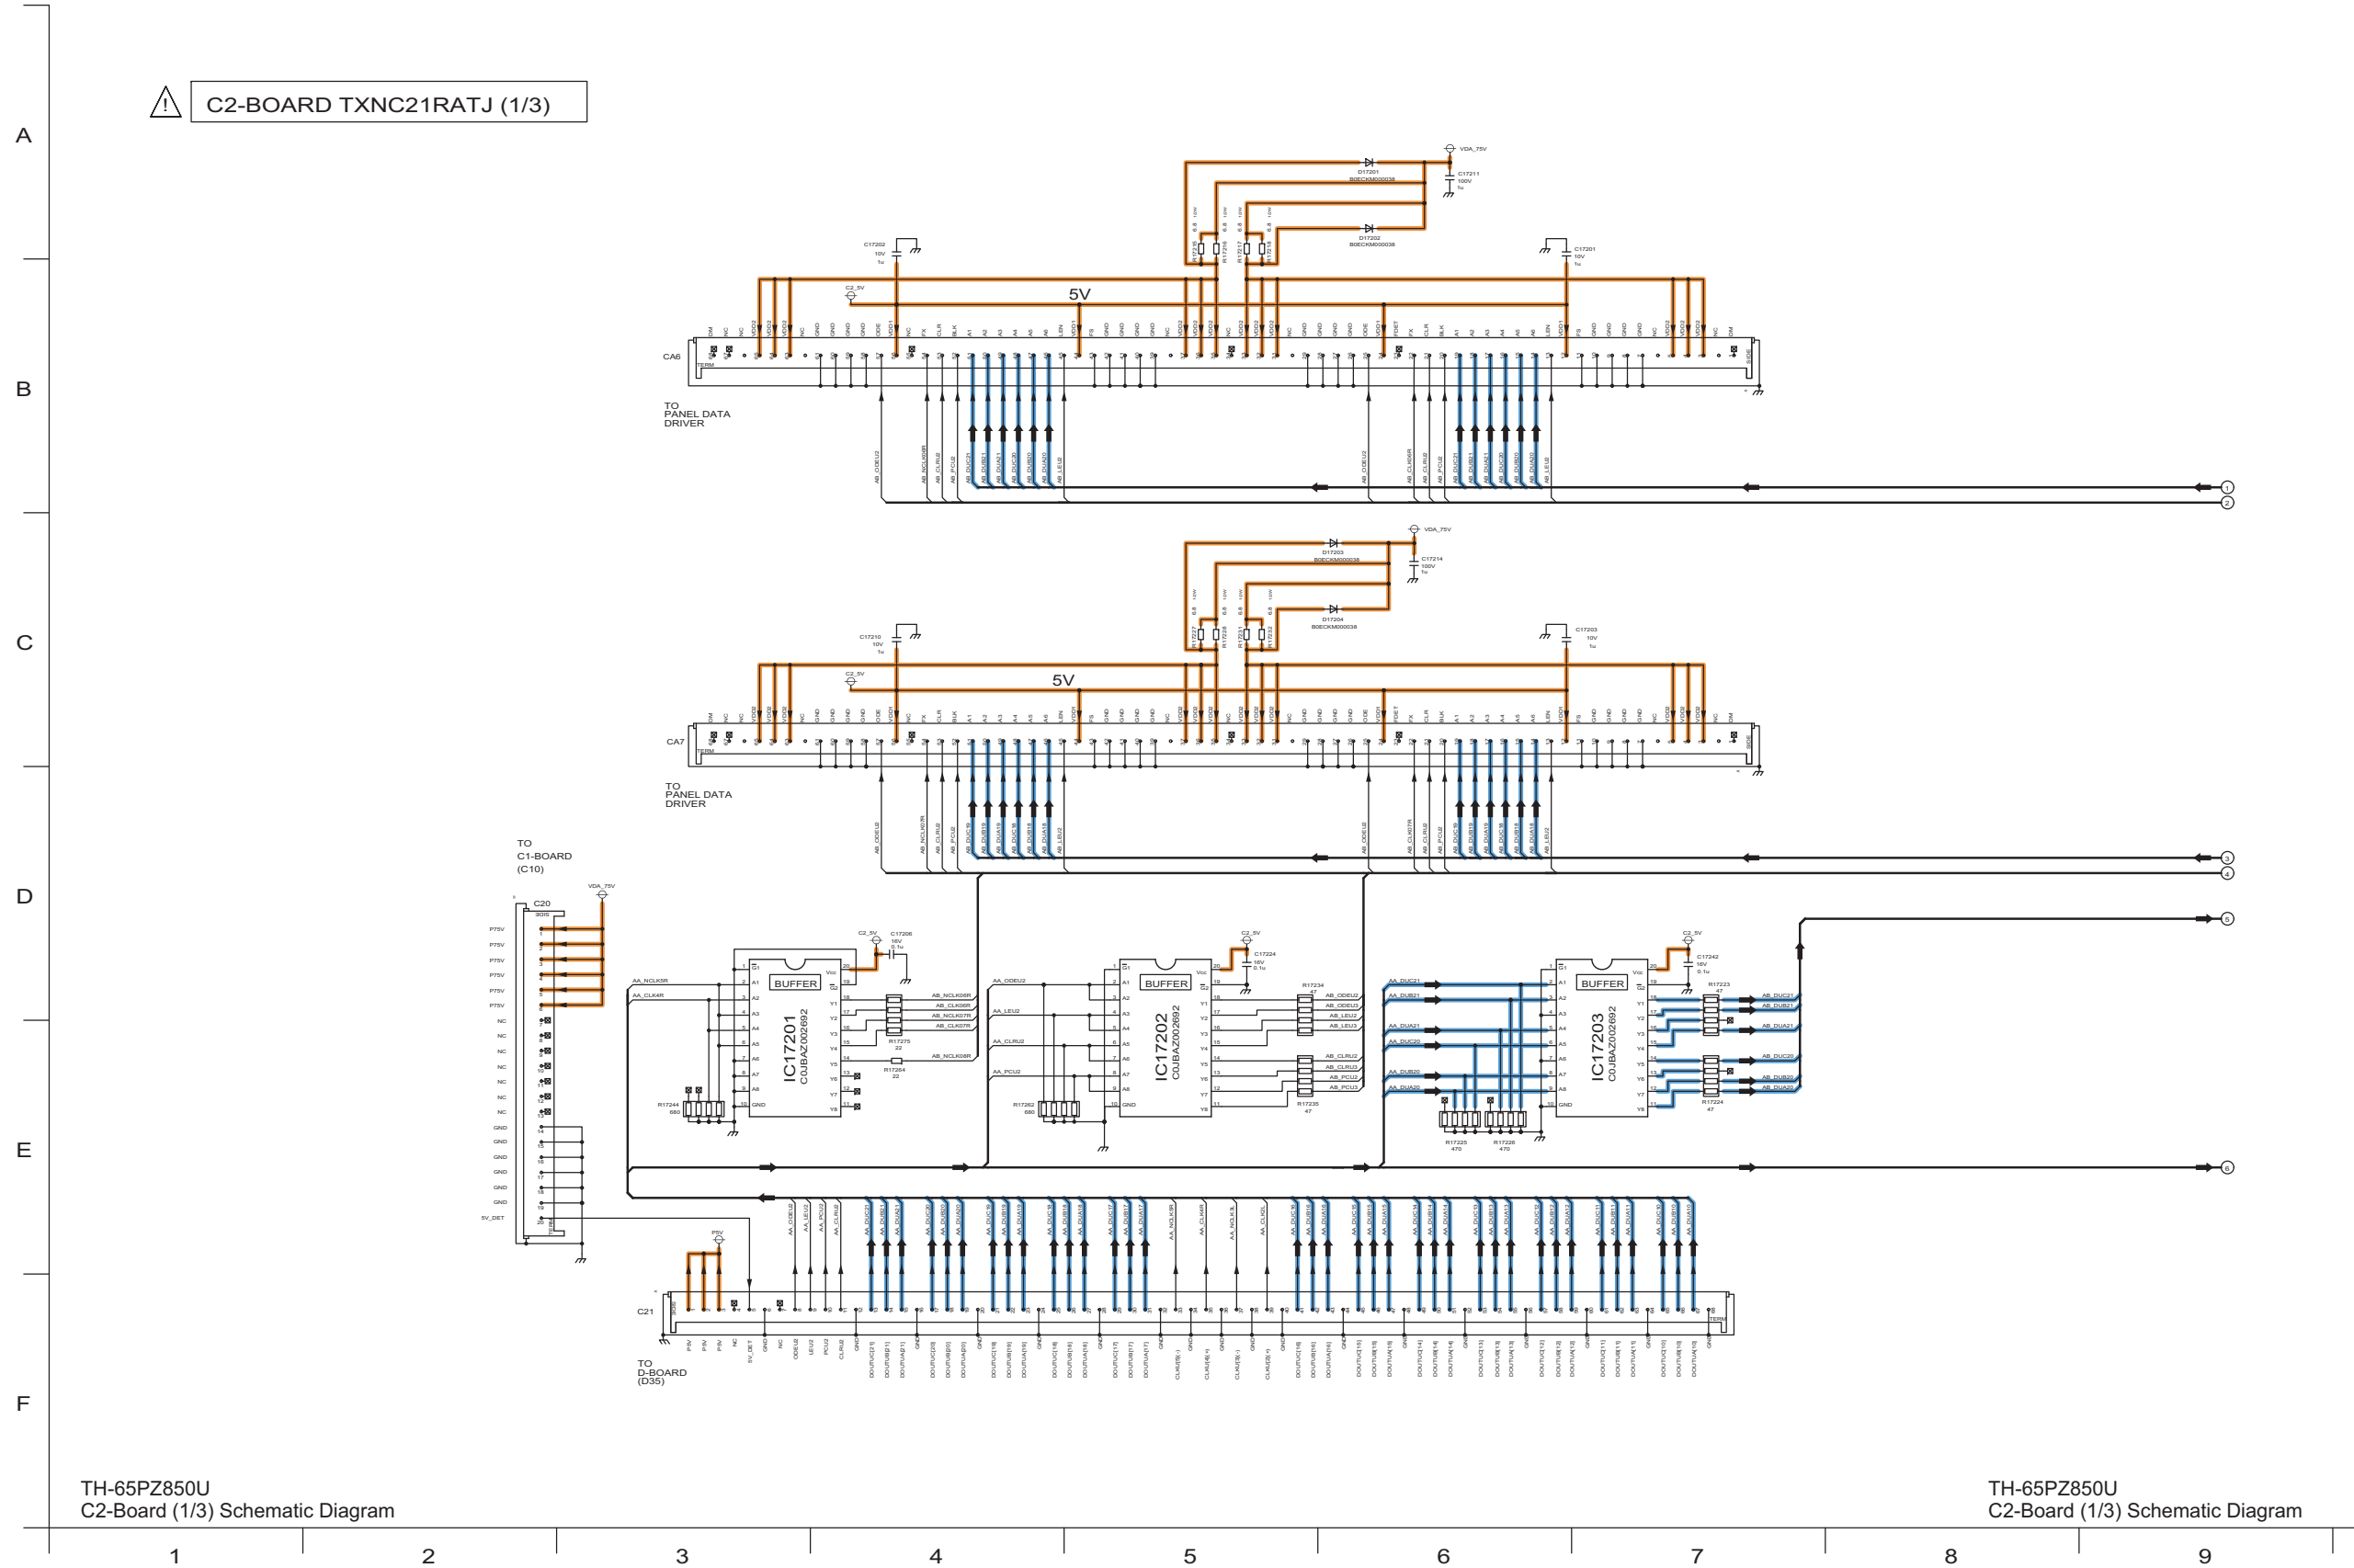

 C2-BOARD TXNC21RATJ (2/3)




11.35. C2-Board (3/3) Schematic Diagram

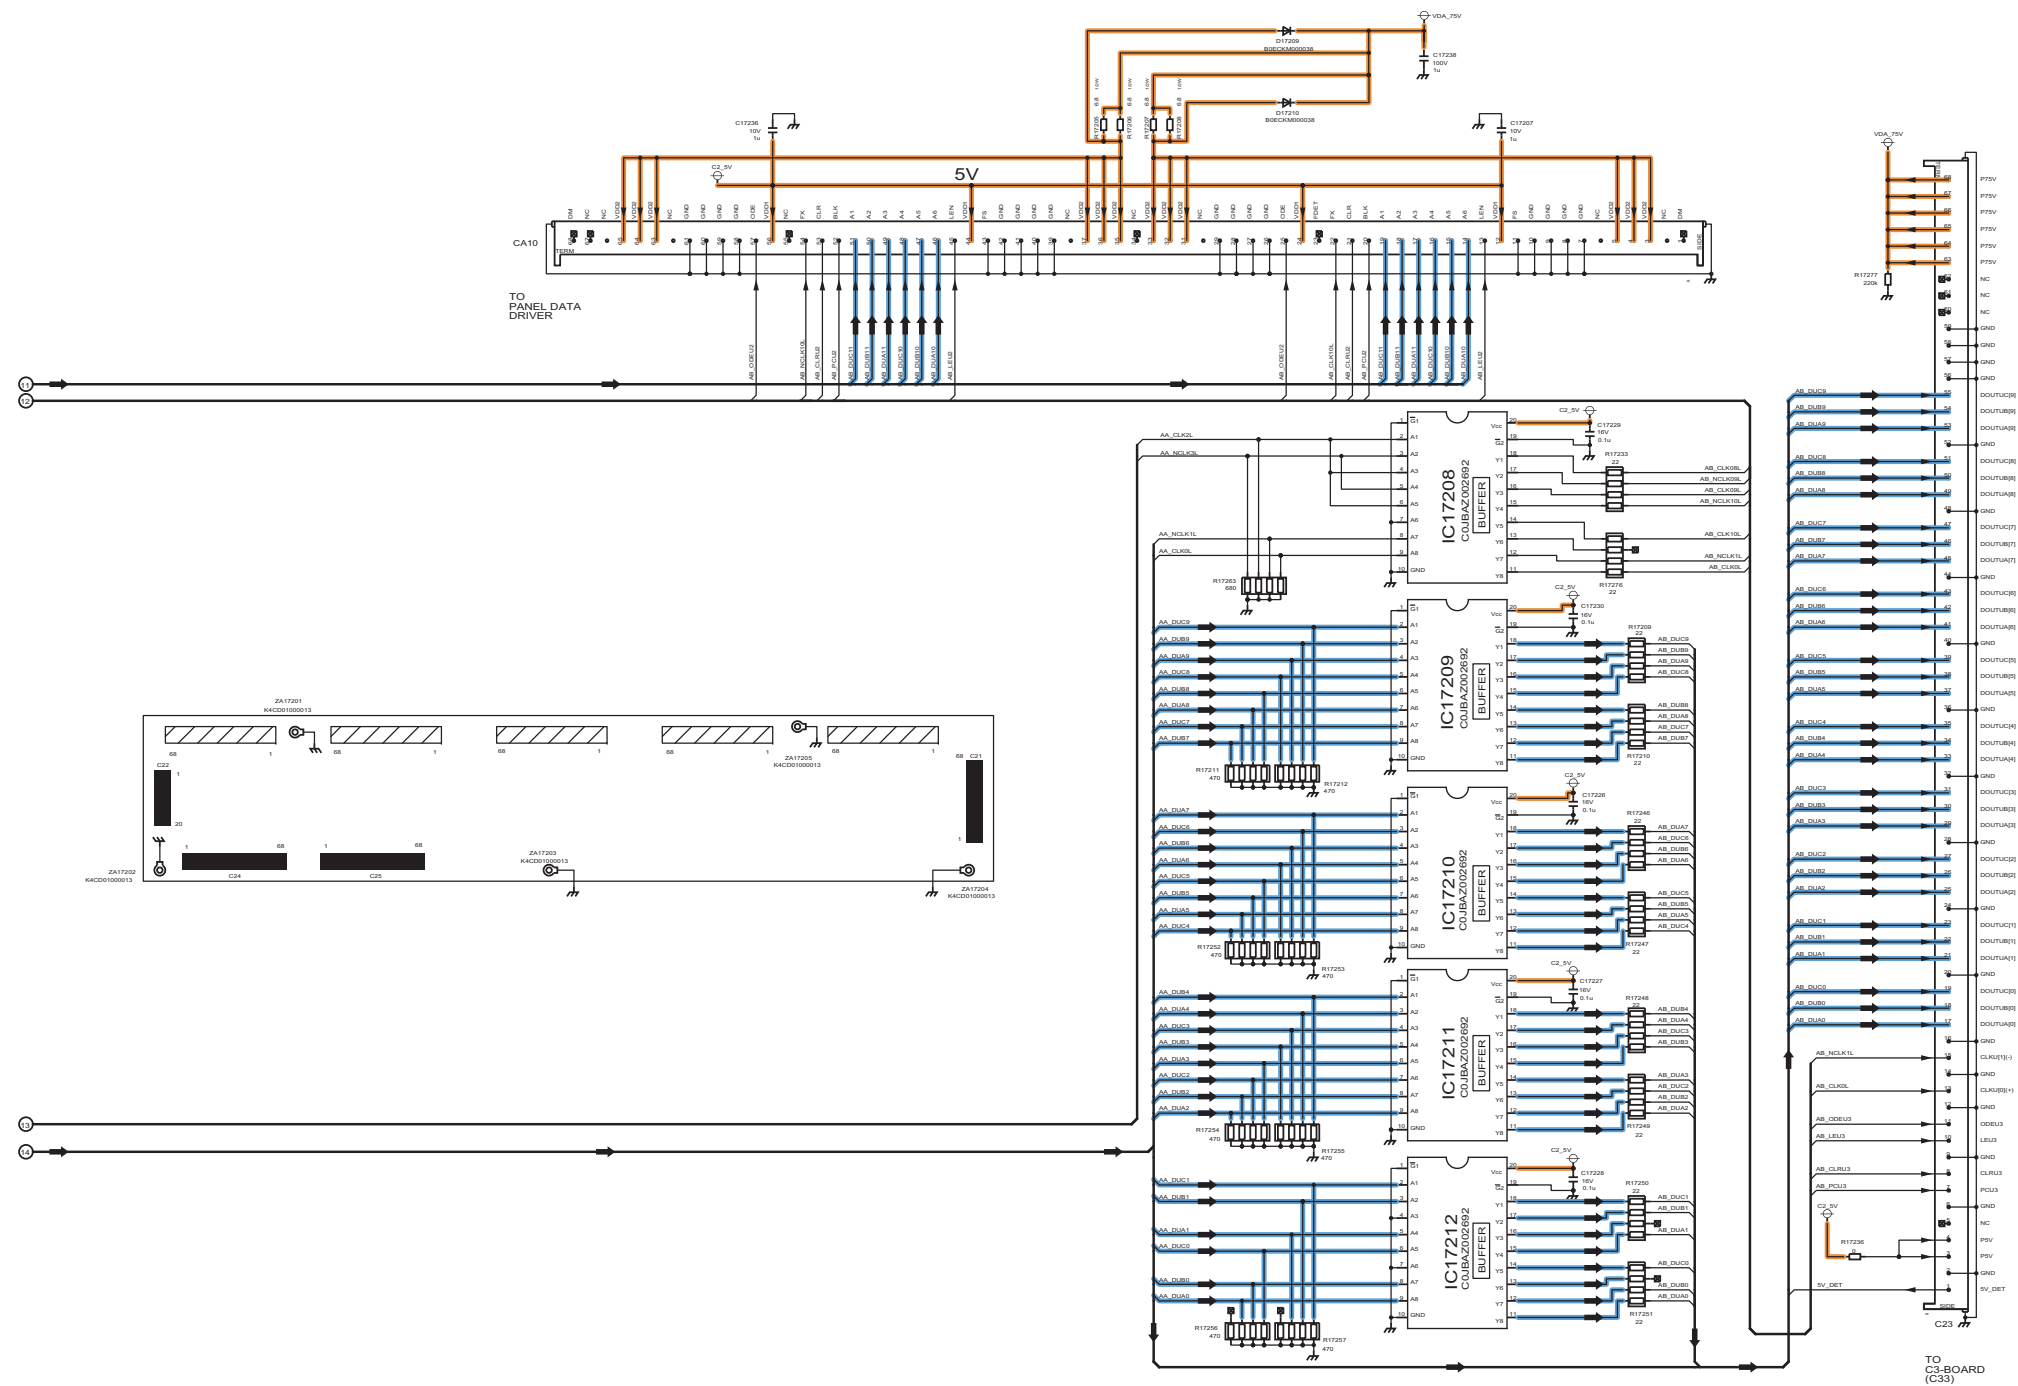



TH-65PZ850U
C2-Board (3/3) Schematic Diagram

TH-65PZ850U
C2-Board (3/3) Schematic Diagram

11.36. C3-Board (1/2) Schematic Diagram

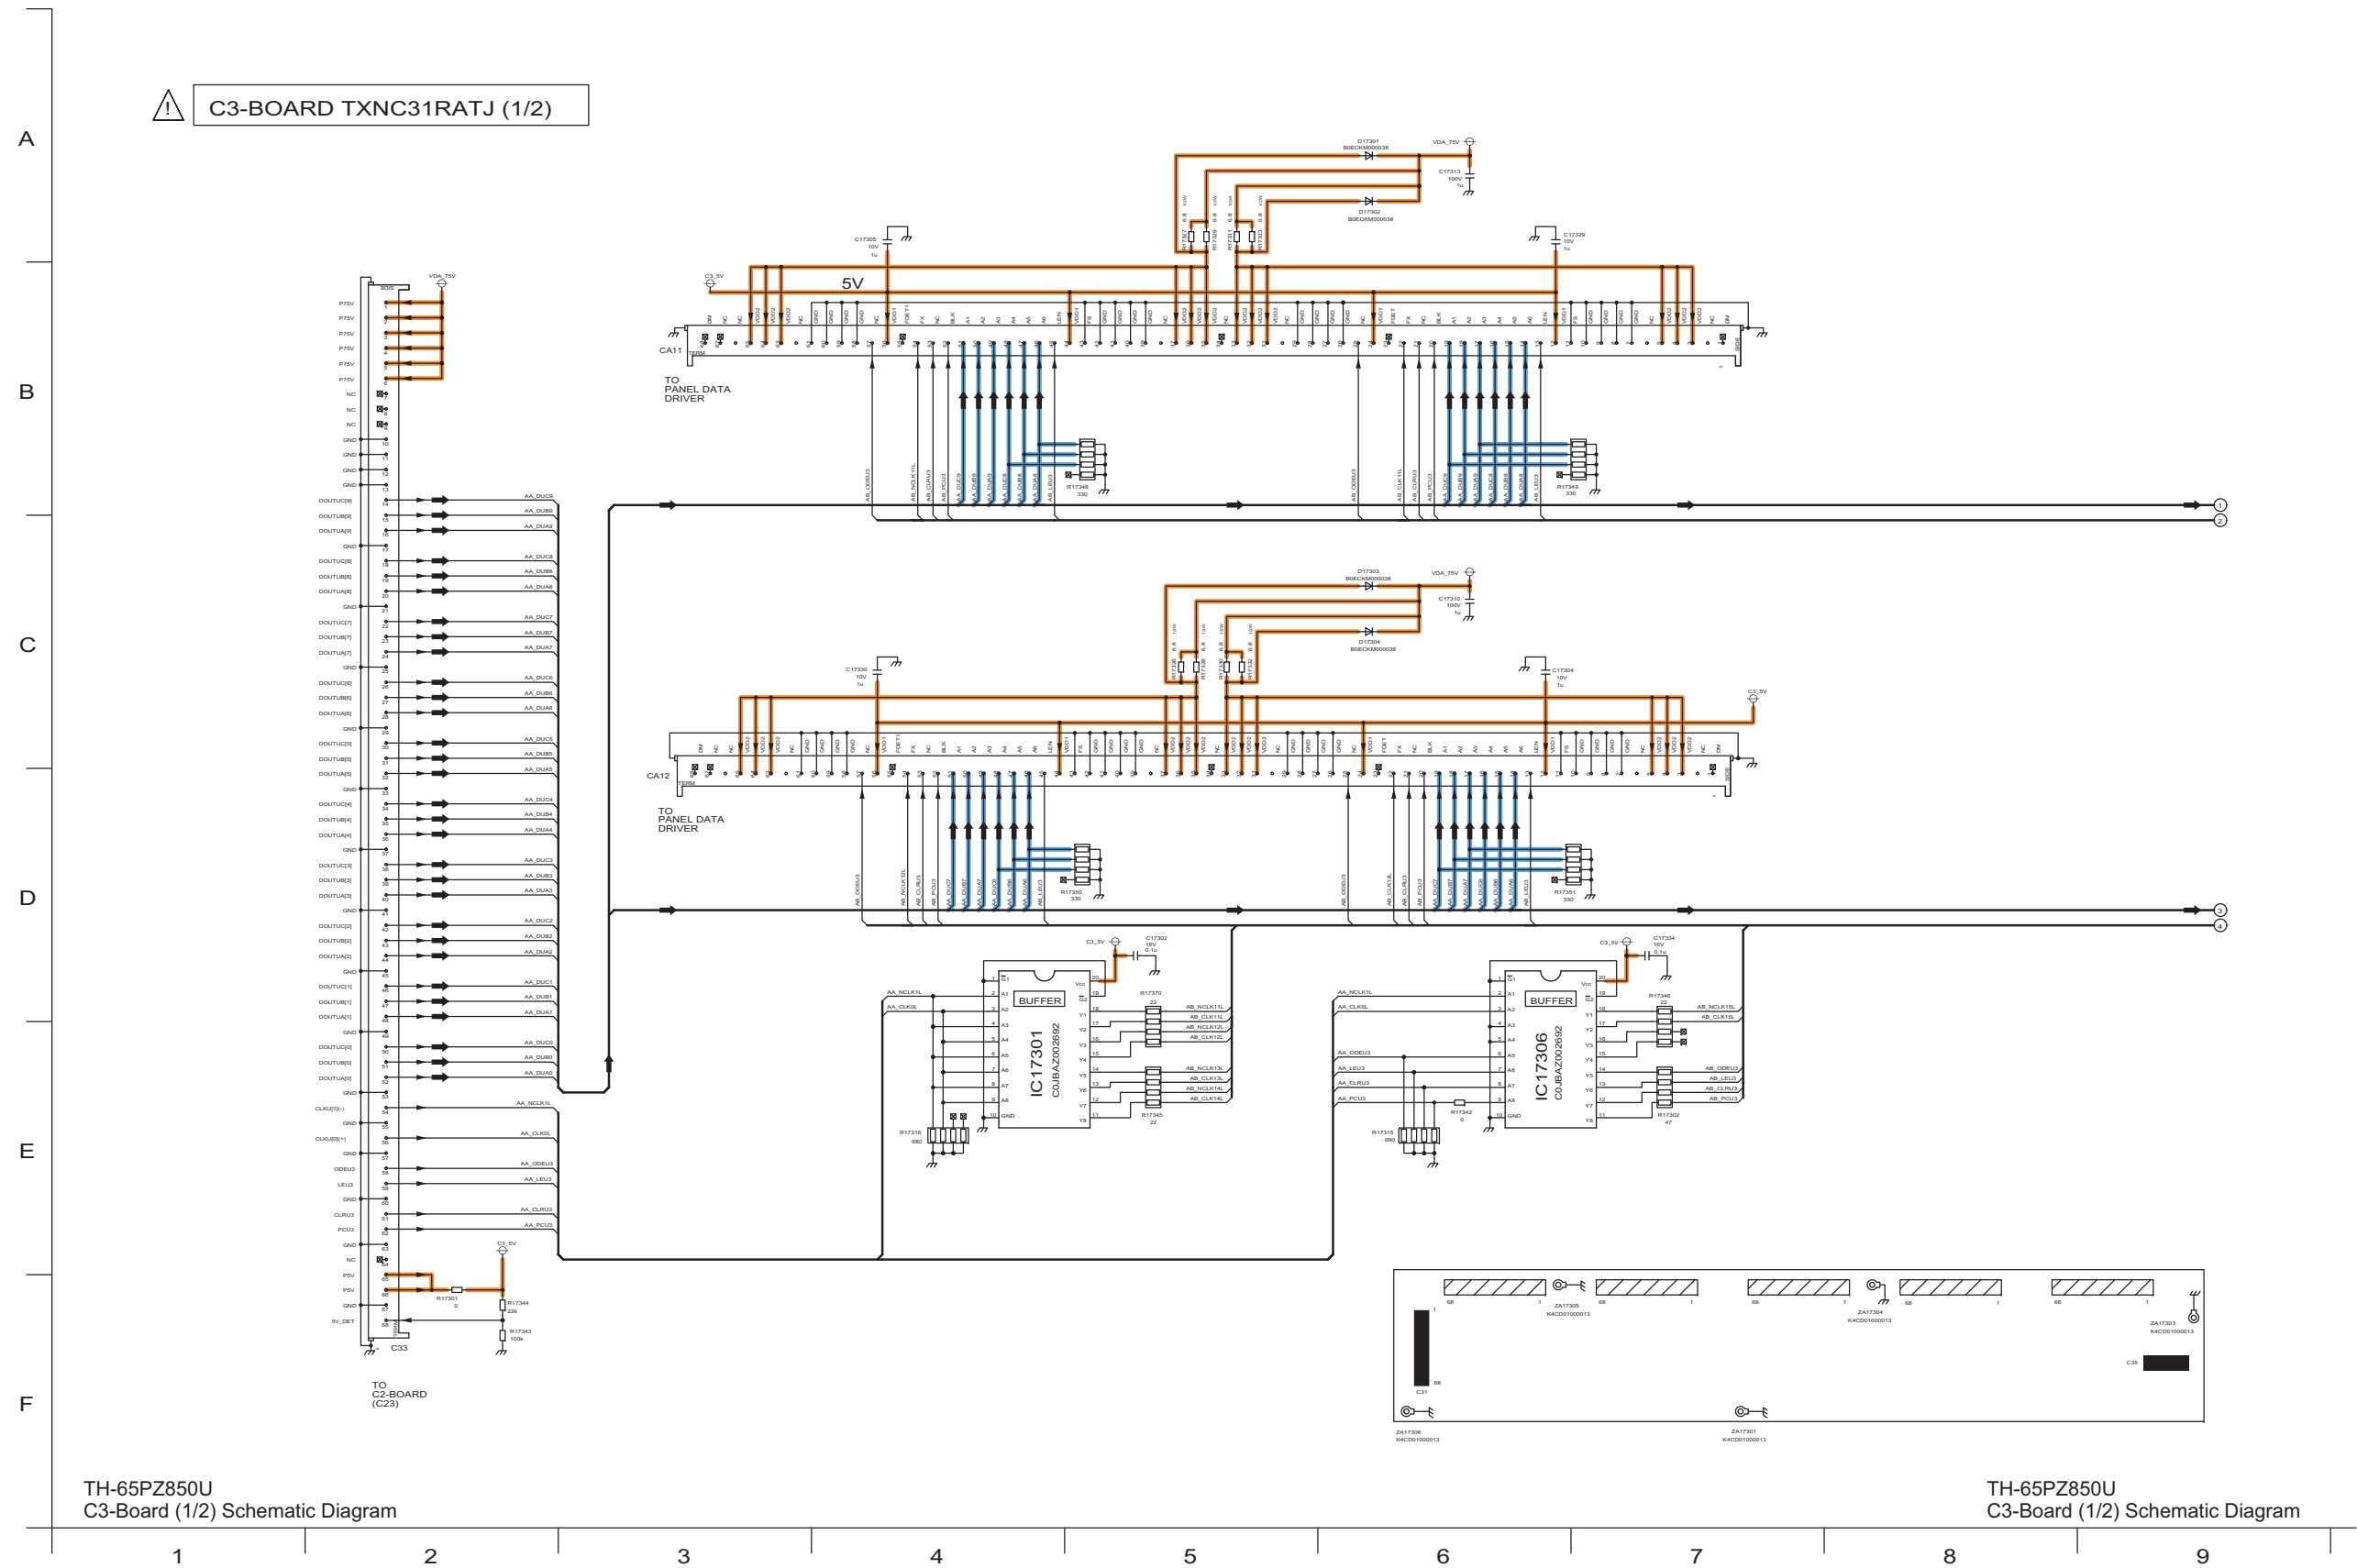


11.37. C3-Board (2/2) Schematic Diagram

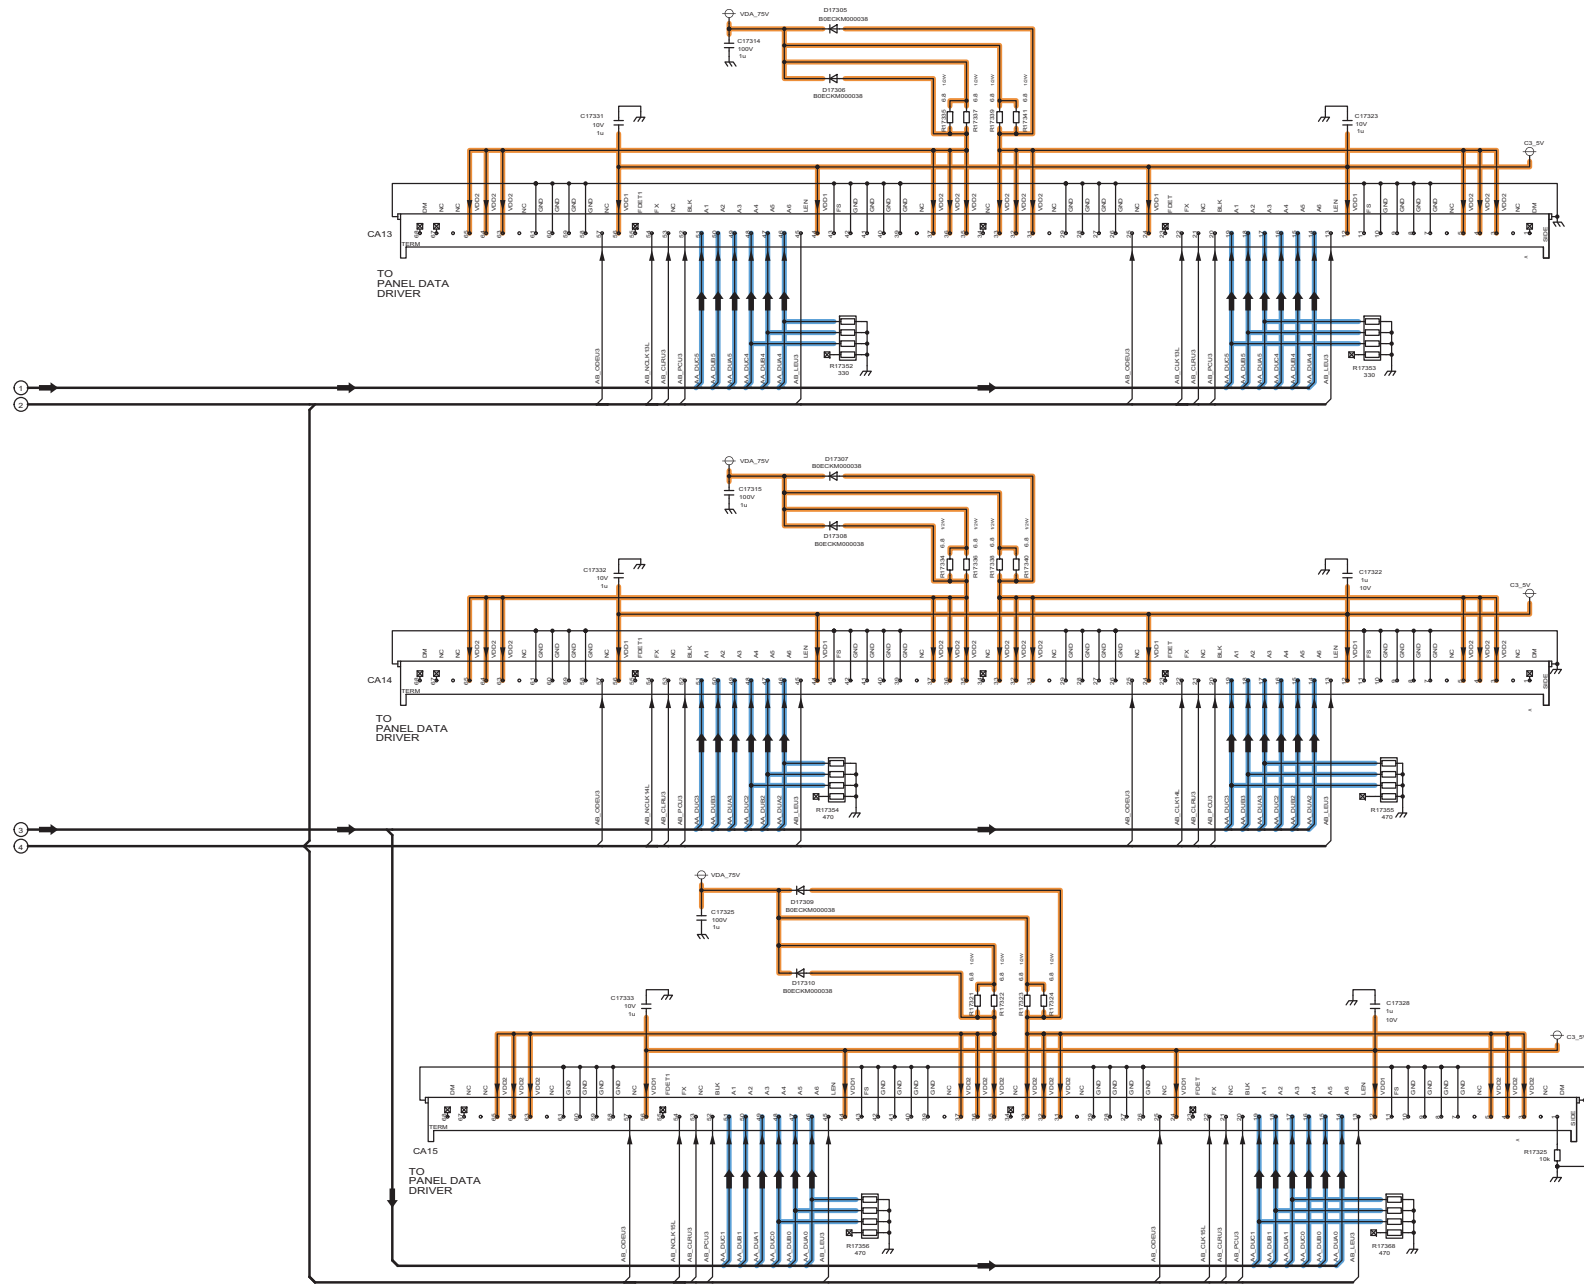

TH-65PZ850U
C3-Board (2/2) Schematic Diagram

TH-65PZ850U
C3-Board (2/2) Schematic Diagram

11.38. C4-Board (1/2) Schematic Diagram

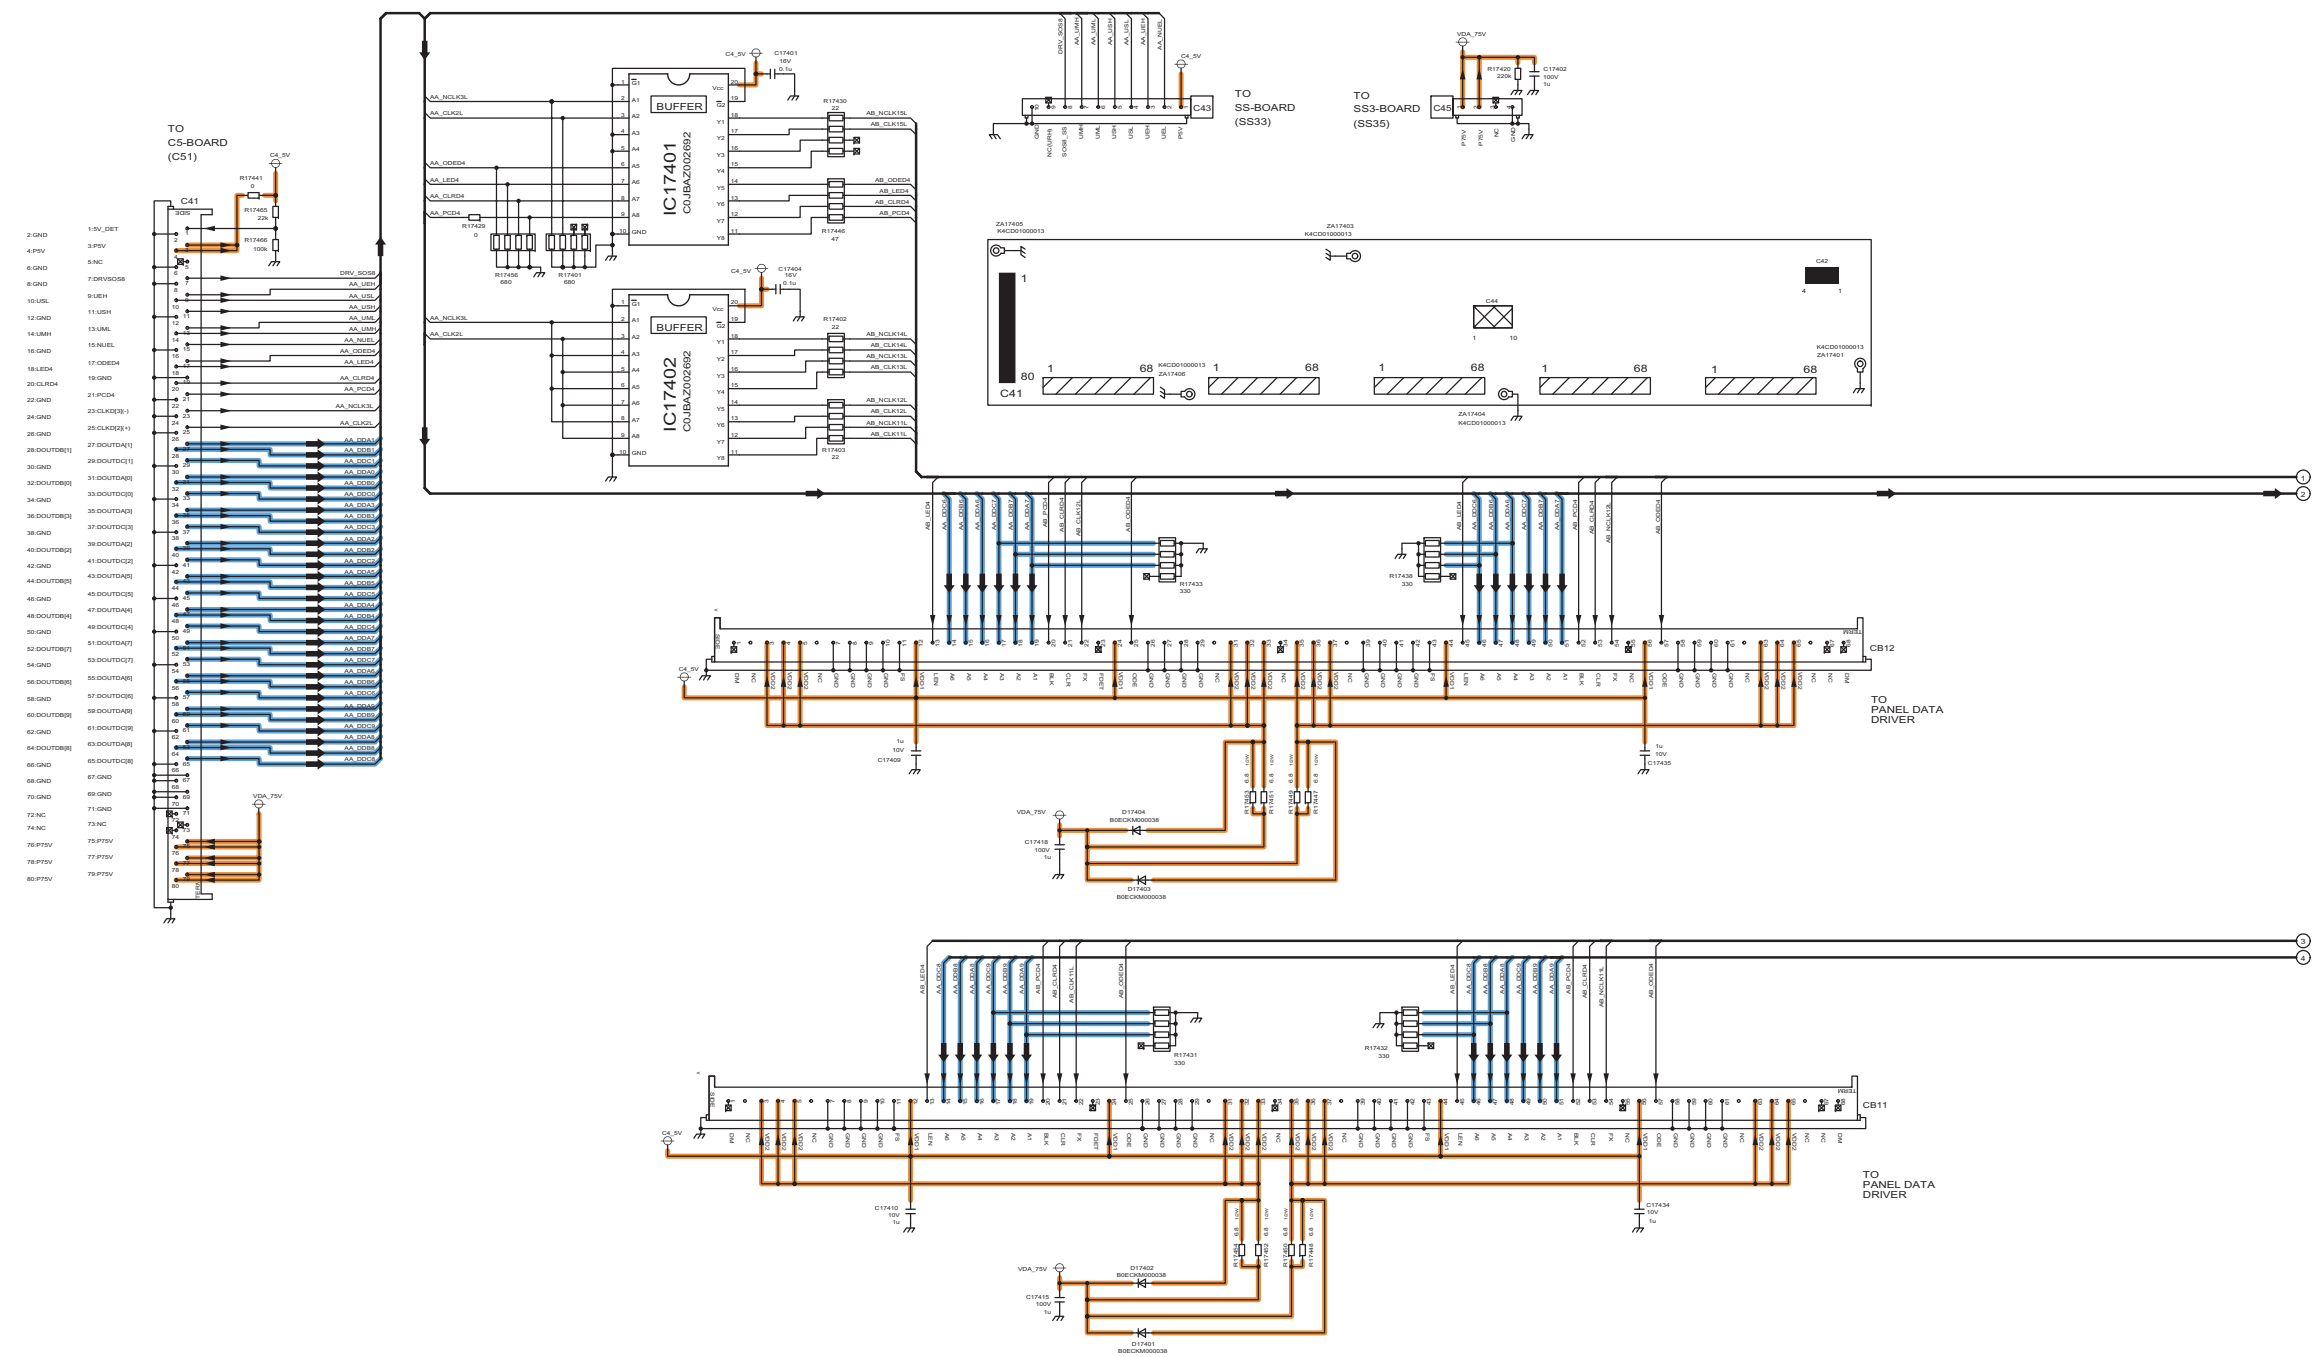


TH-65PZ850U
C4-Board (1/2) Schematic Diagram

TH-65PZ850U
C4-Board (1/2) Schematic Diagram

11.39. C4-Board (2/2) Schematic Diagram


 C4-BOARD TXNC41RATJ (2/2)

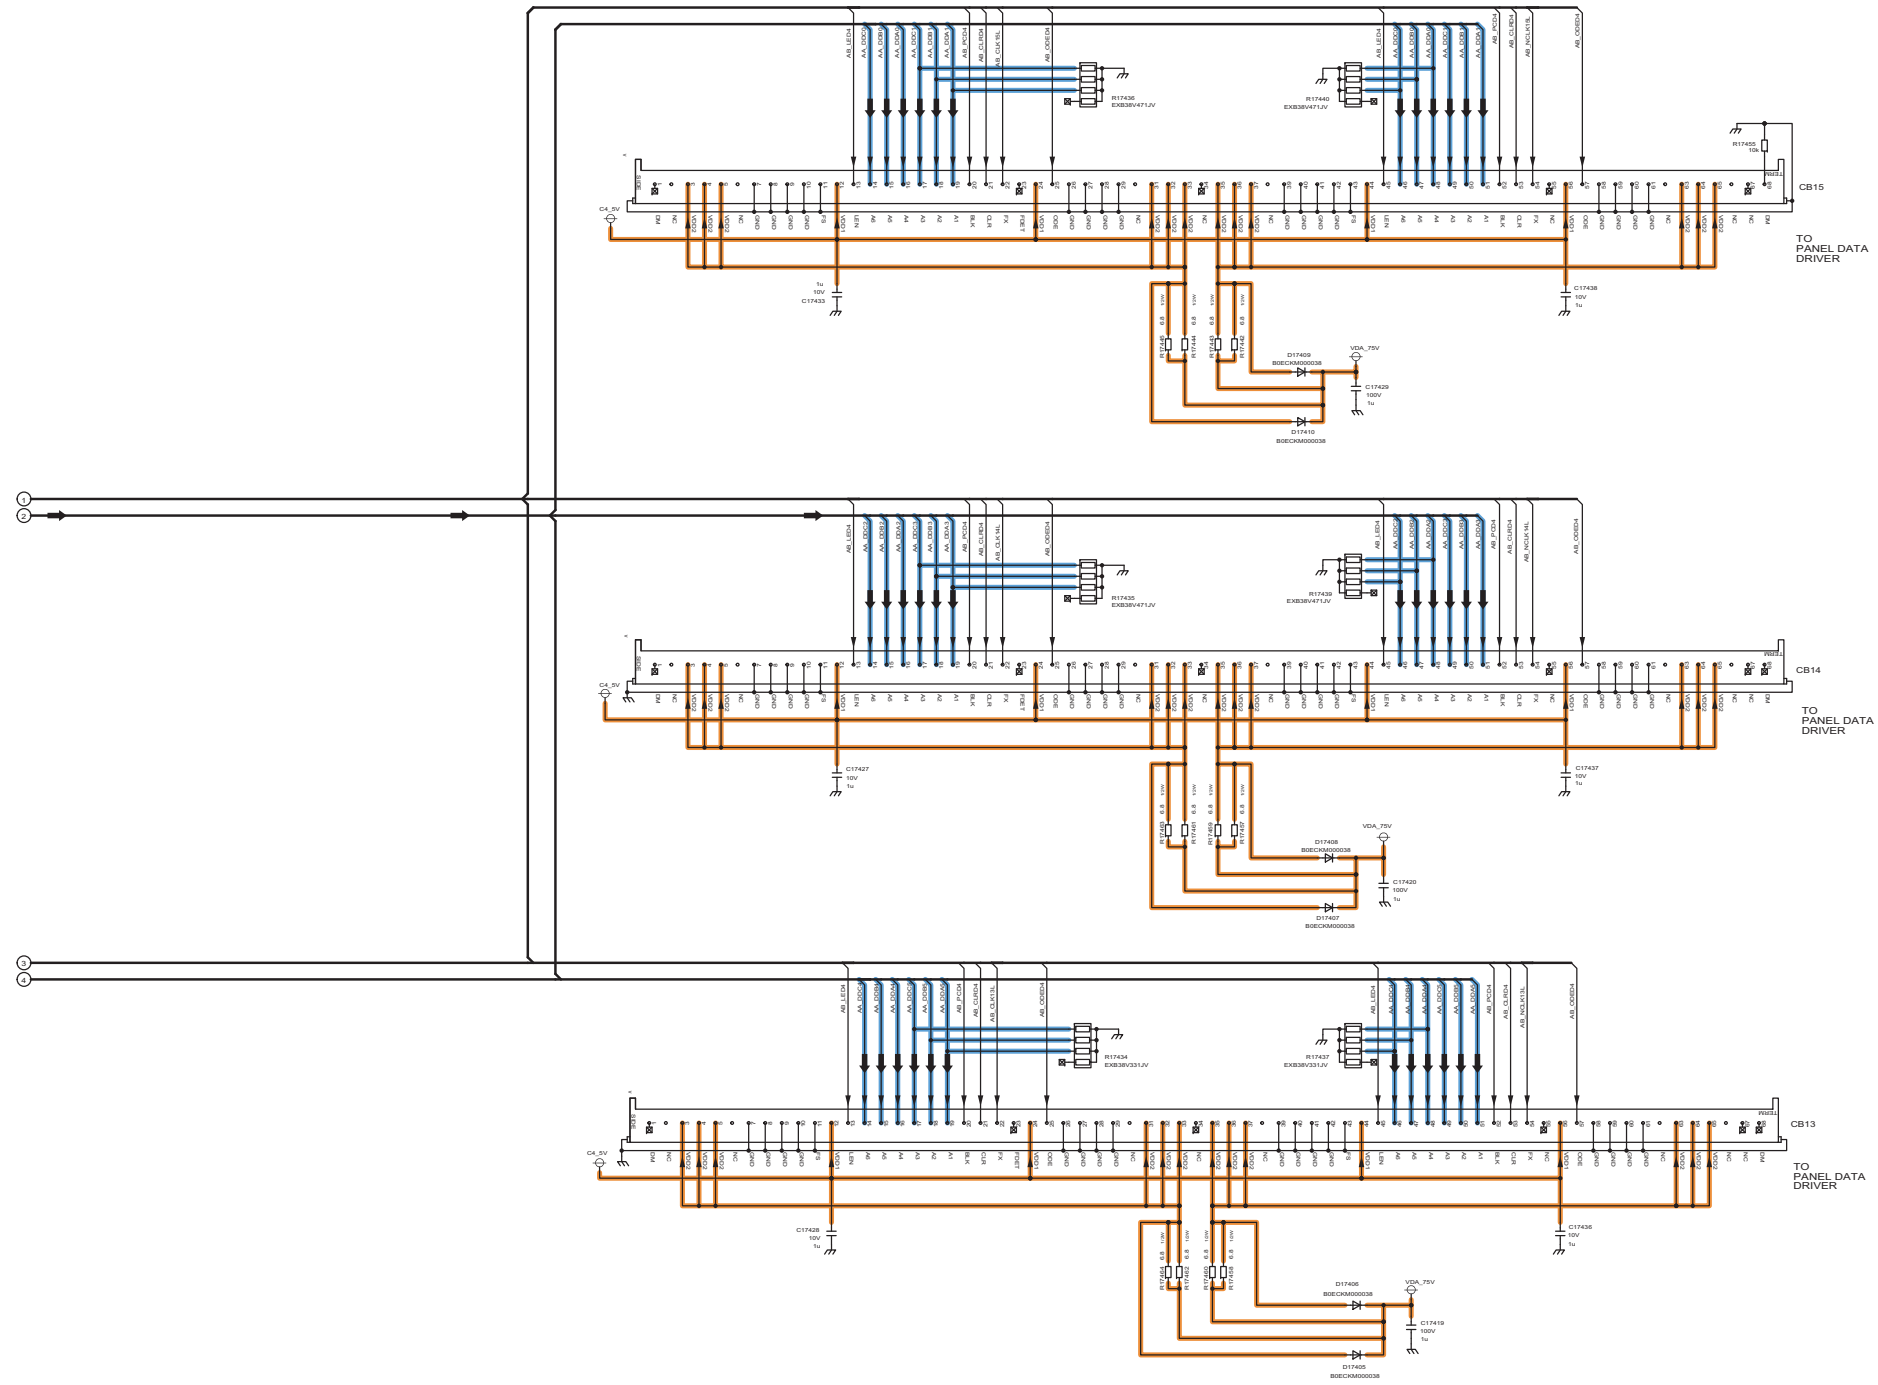

TH-65PZ850U
C4-Board (2/2) Schematic Diagram

TH-65PZ850U
C4-Board (2/2) Schematic Diagram

11.40. C5-Board (1/3) Schematic Diagram

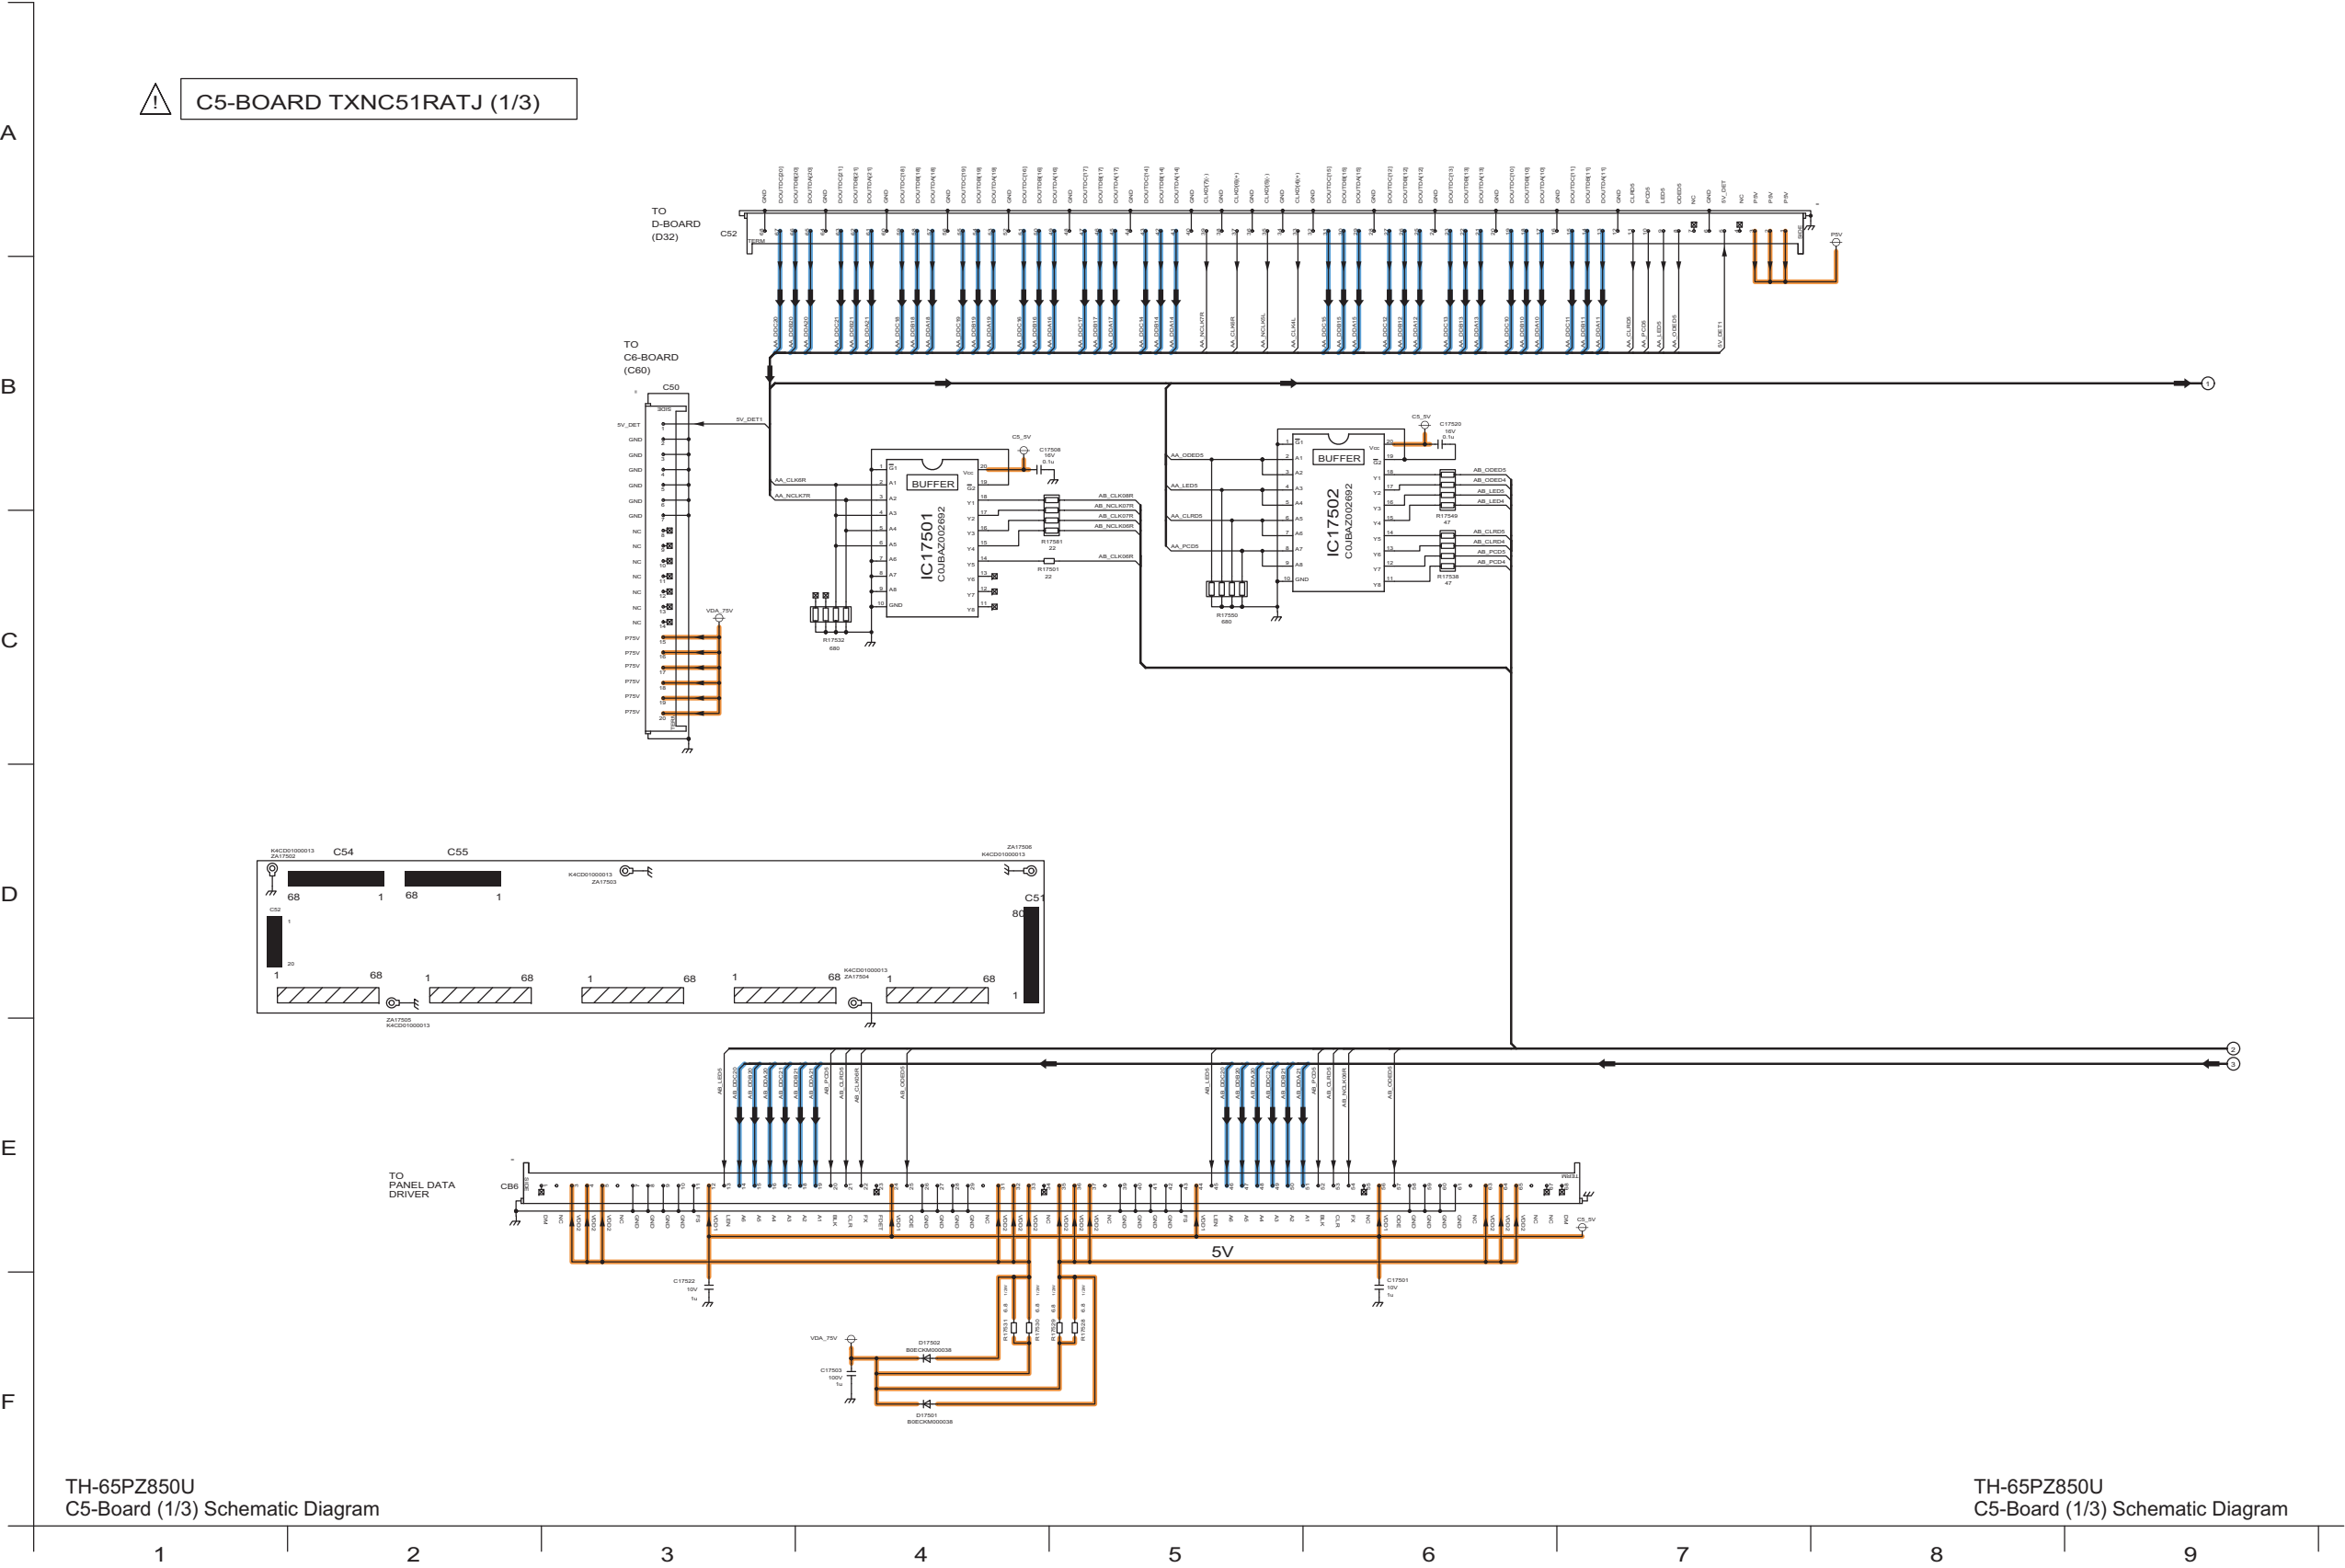


11.41. C5-Board (2/3) Schematic Diagram



TH-65PZ850U C5-Board (2/3) Schematic Diagram

TH-65PZ850U
C5-Board (2/3) Schematic Diagram


11.42. C5-Board (3/3) Schematic Diagram

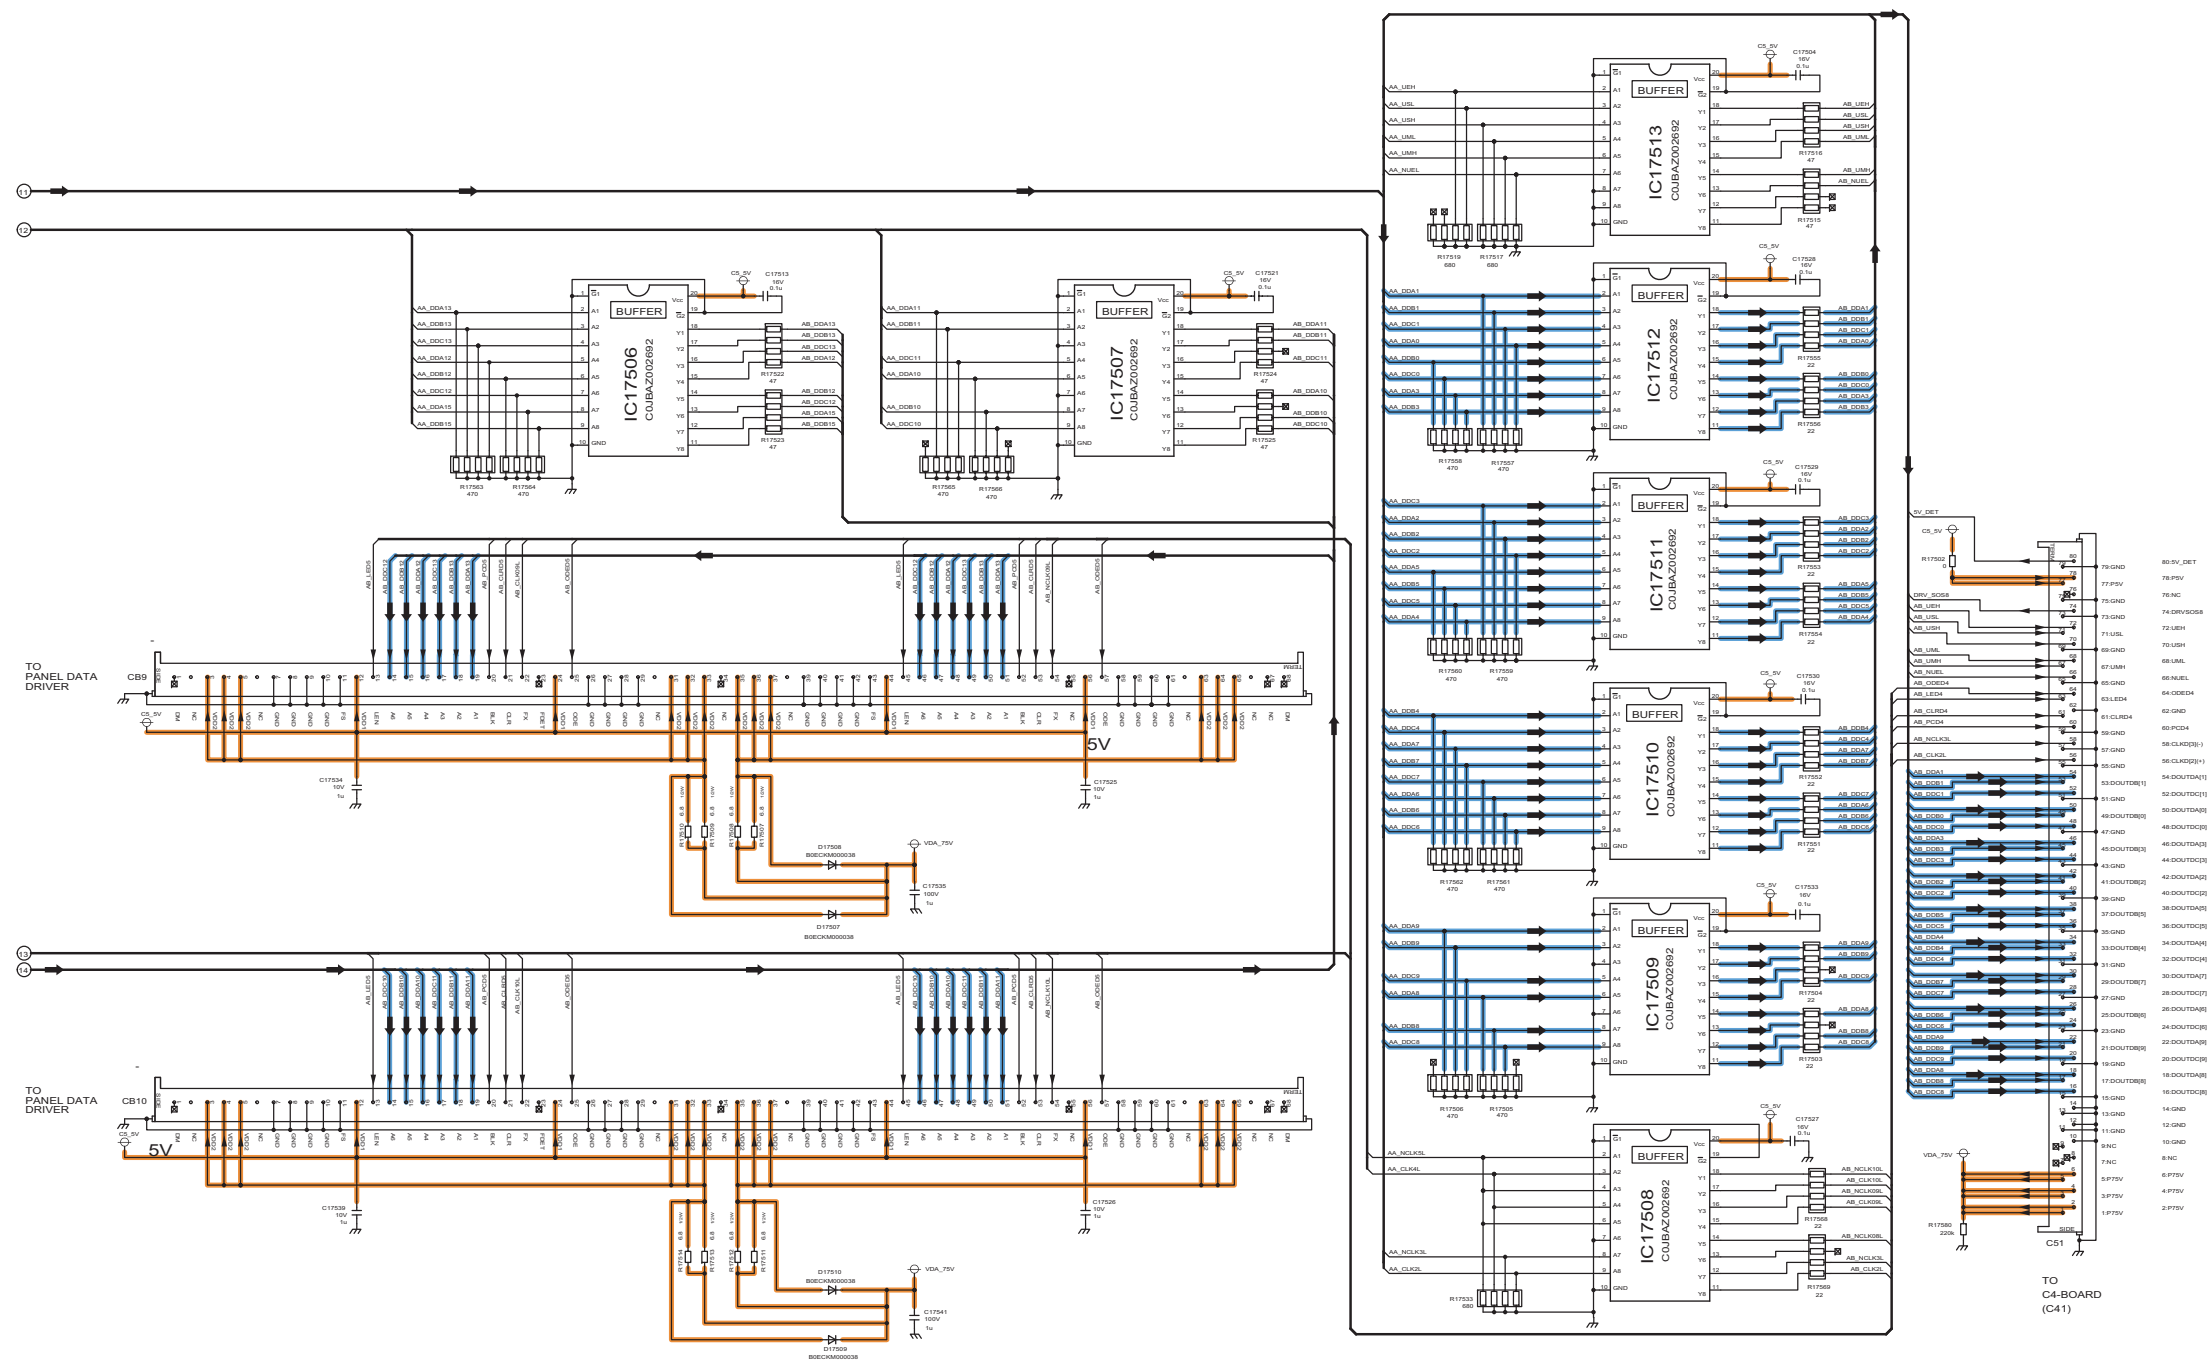


TH-65PZ850U
C5-Board (3/3) Schematic Diagram

TH-65PZ850U
C5-Board (3/3) Schematic Diagram

11.43. C6-Board (1/2) Schematic Diagram

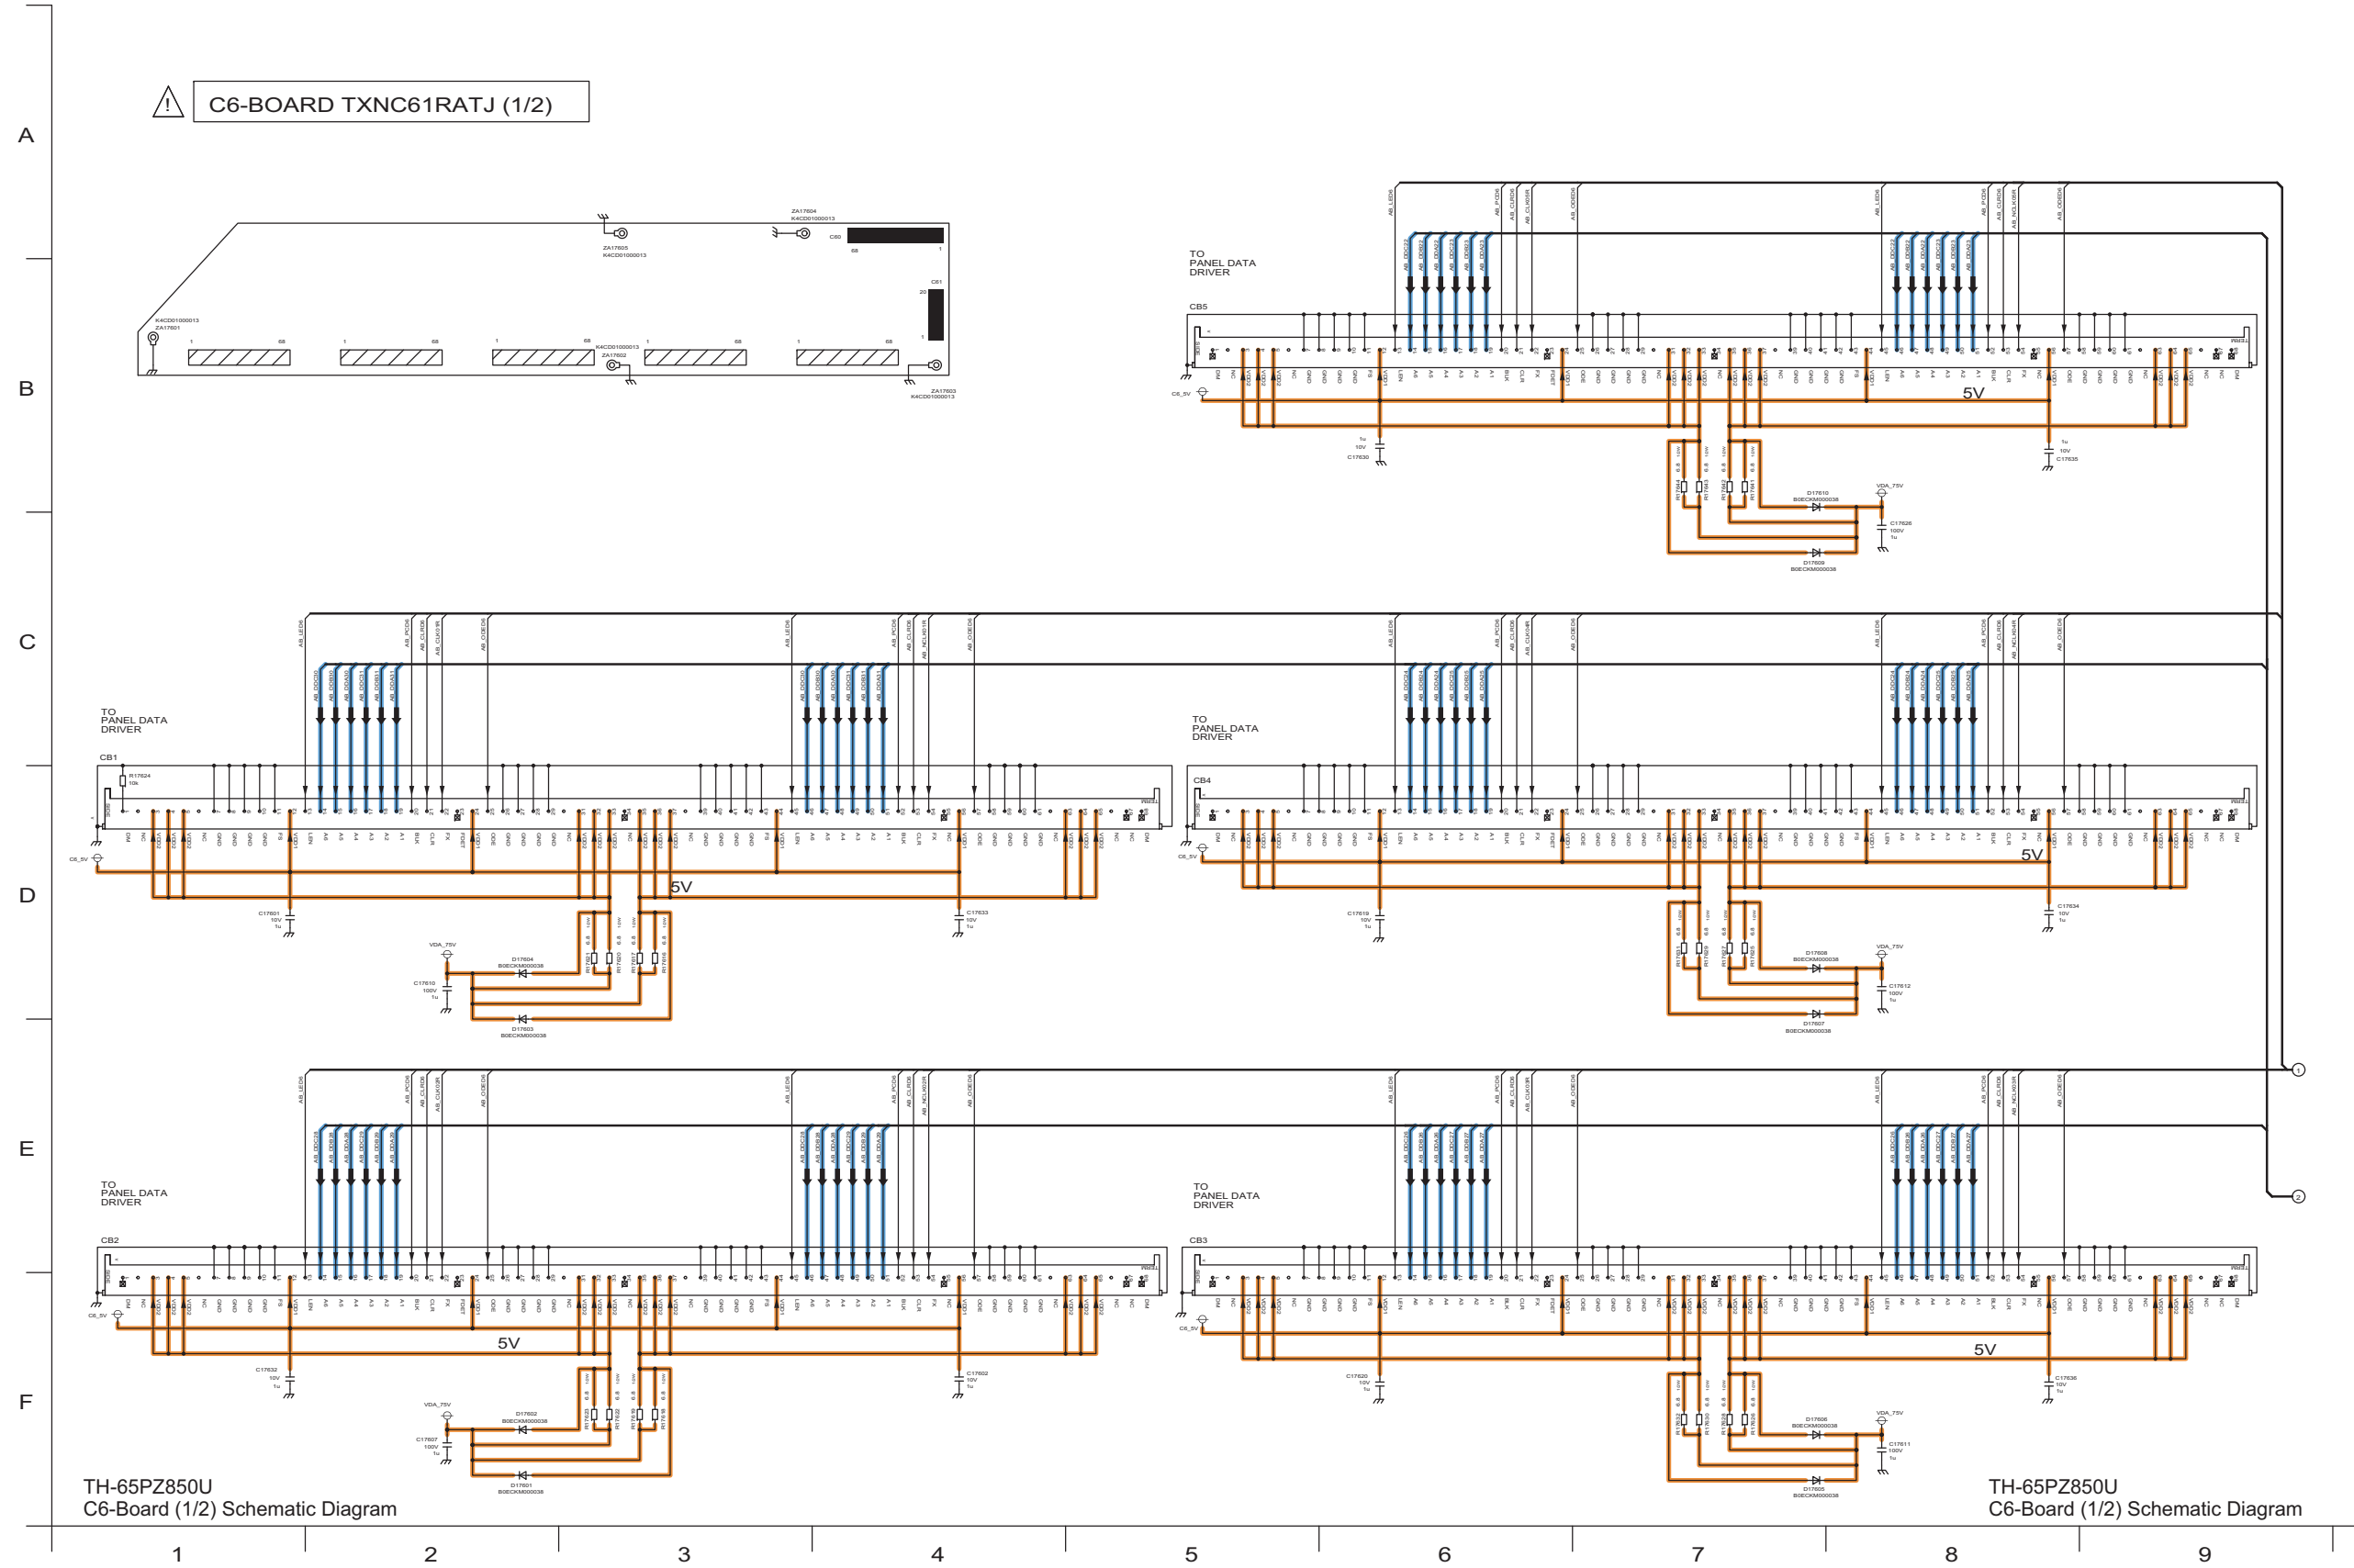


11.44. C6-Board (2/2) Schematic Diagram

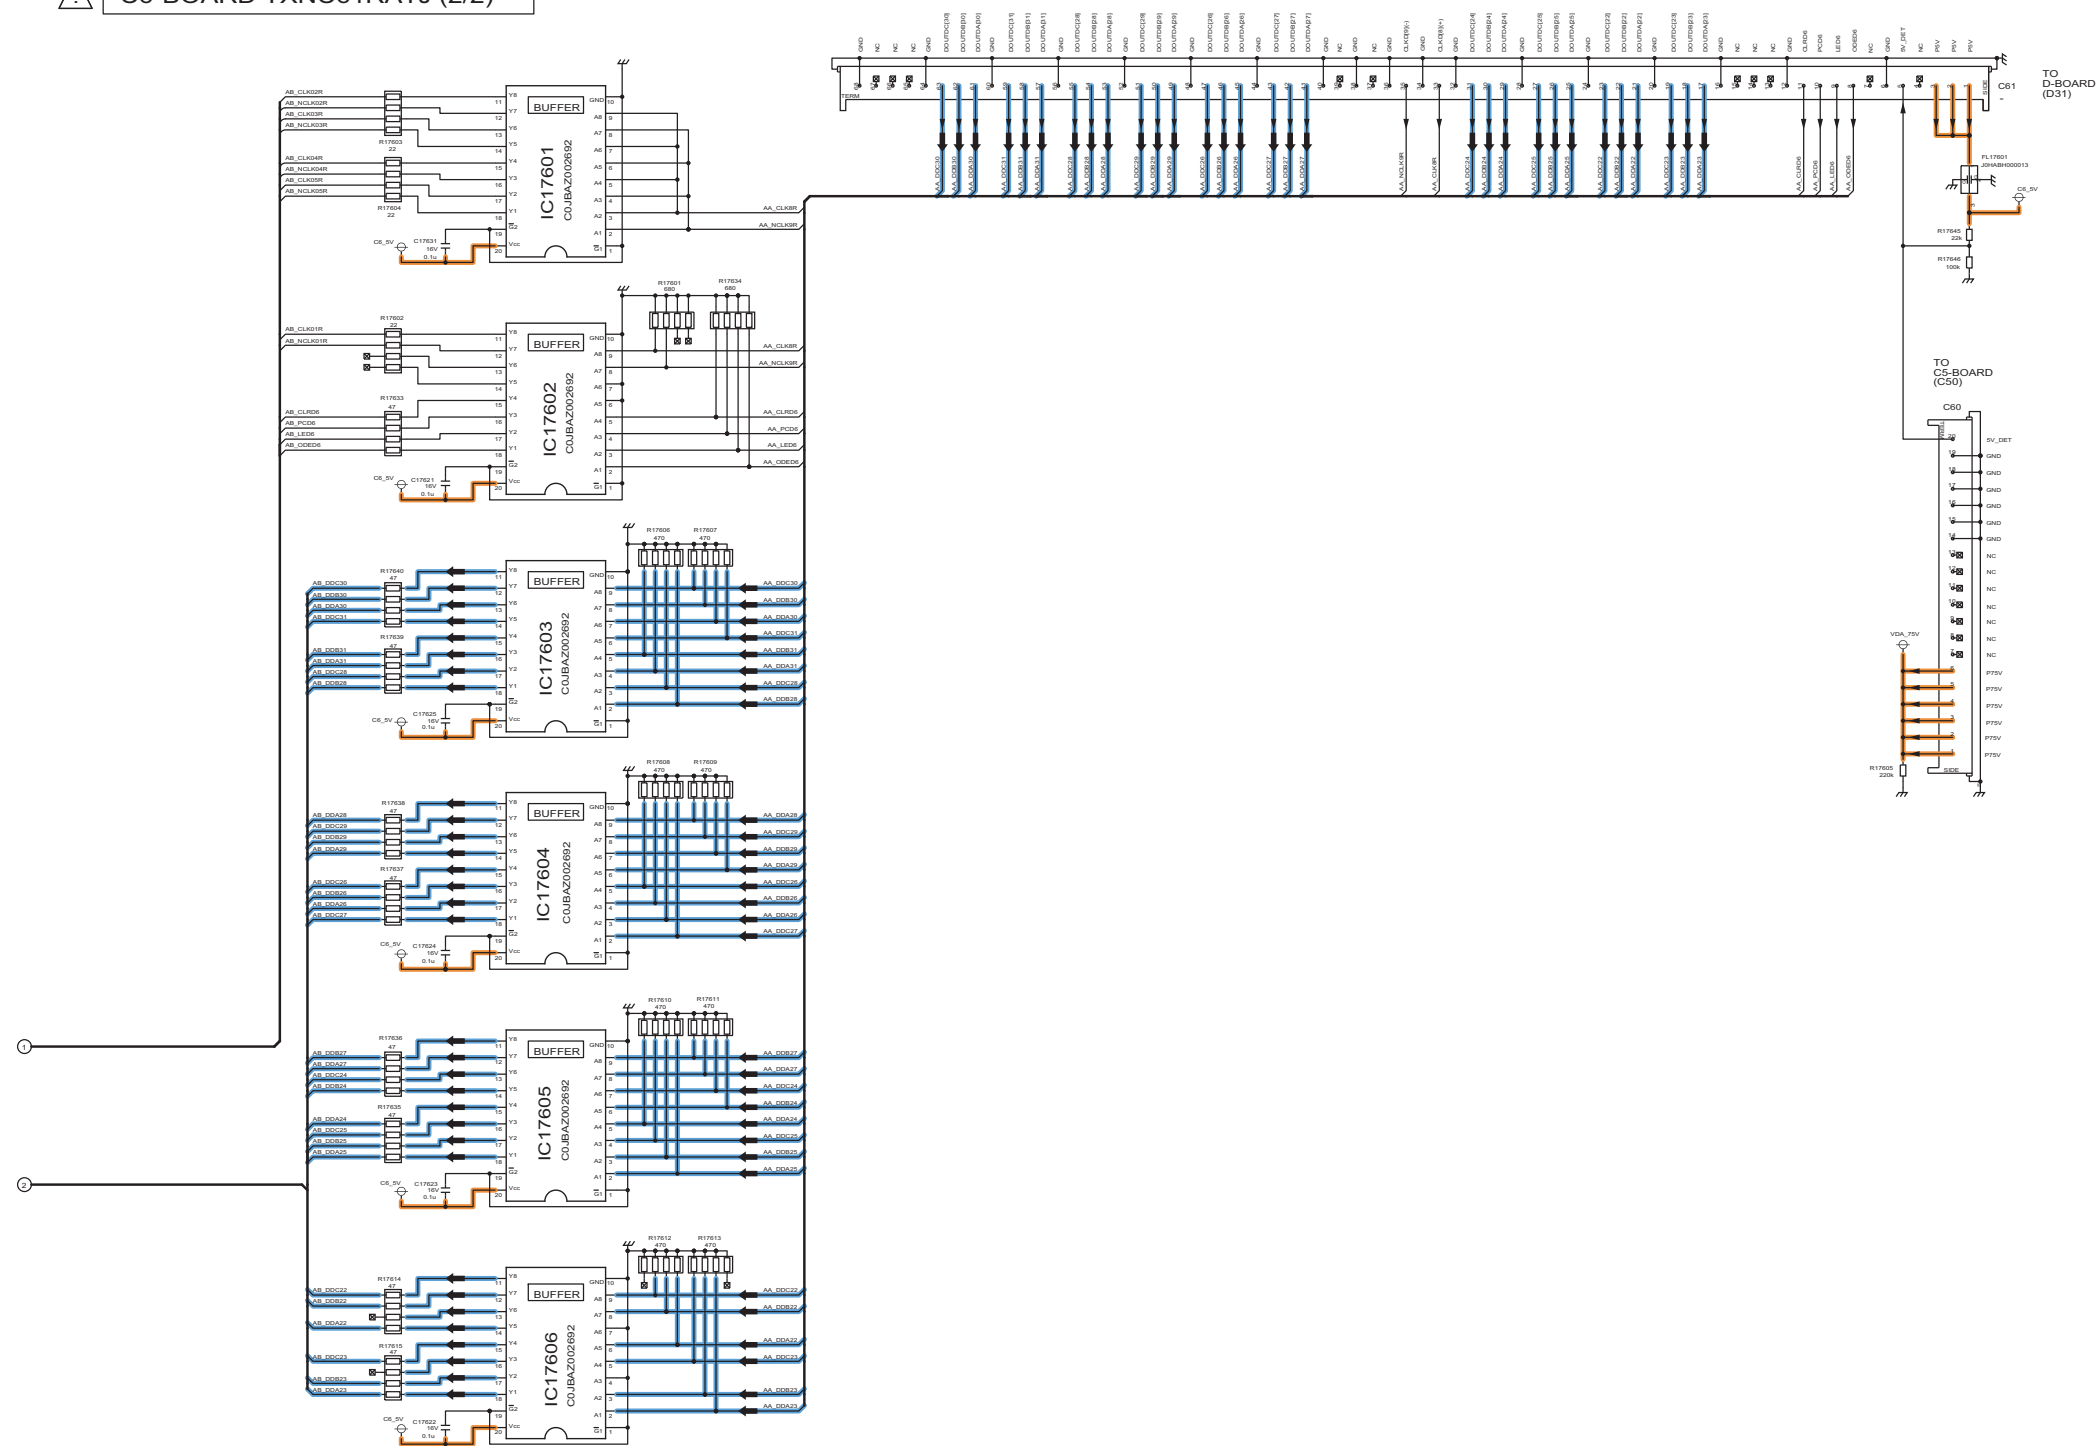


TH-65PZ850U
C6-Board (2/2) Schematic Diagram

TH-65PZ850U
C6-Board (2/2) Schematic Diagram

11.45. SC-Board (1/3) Schematic Diagram

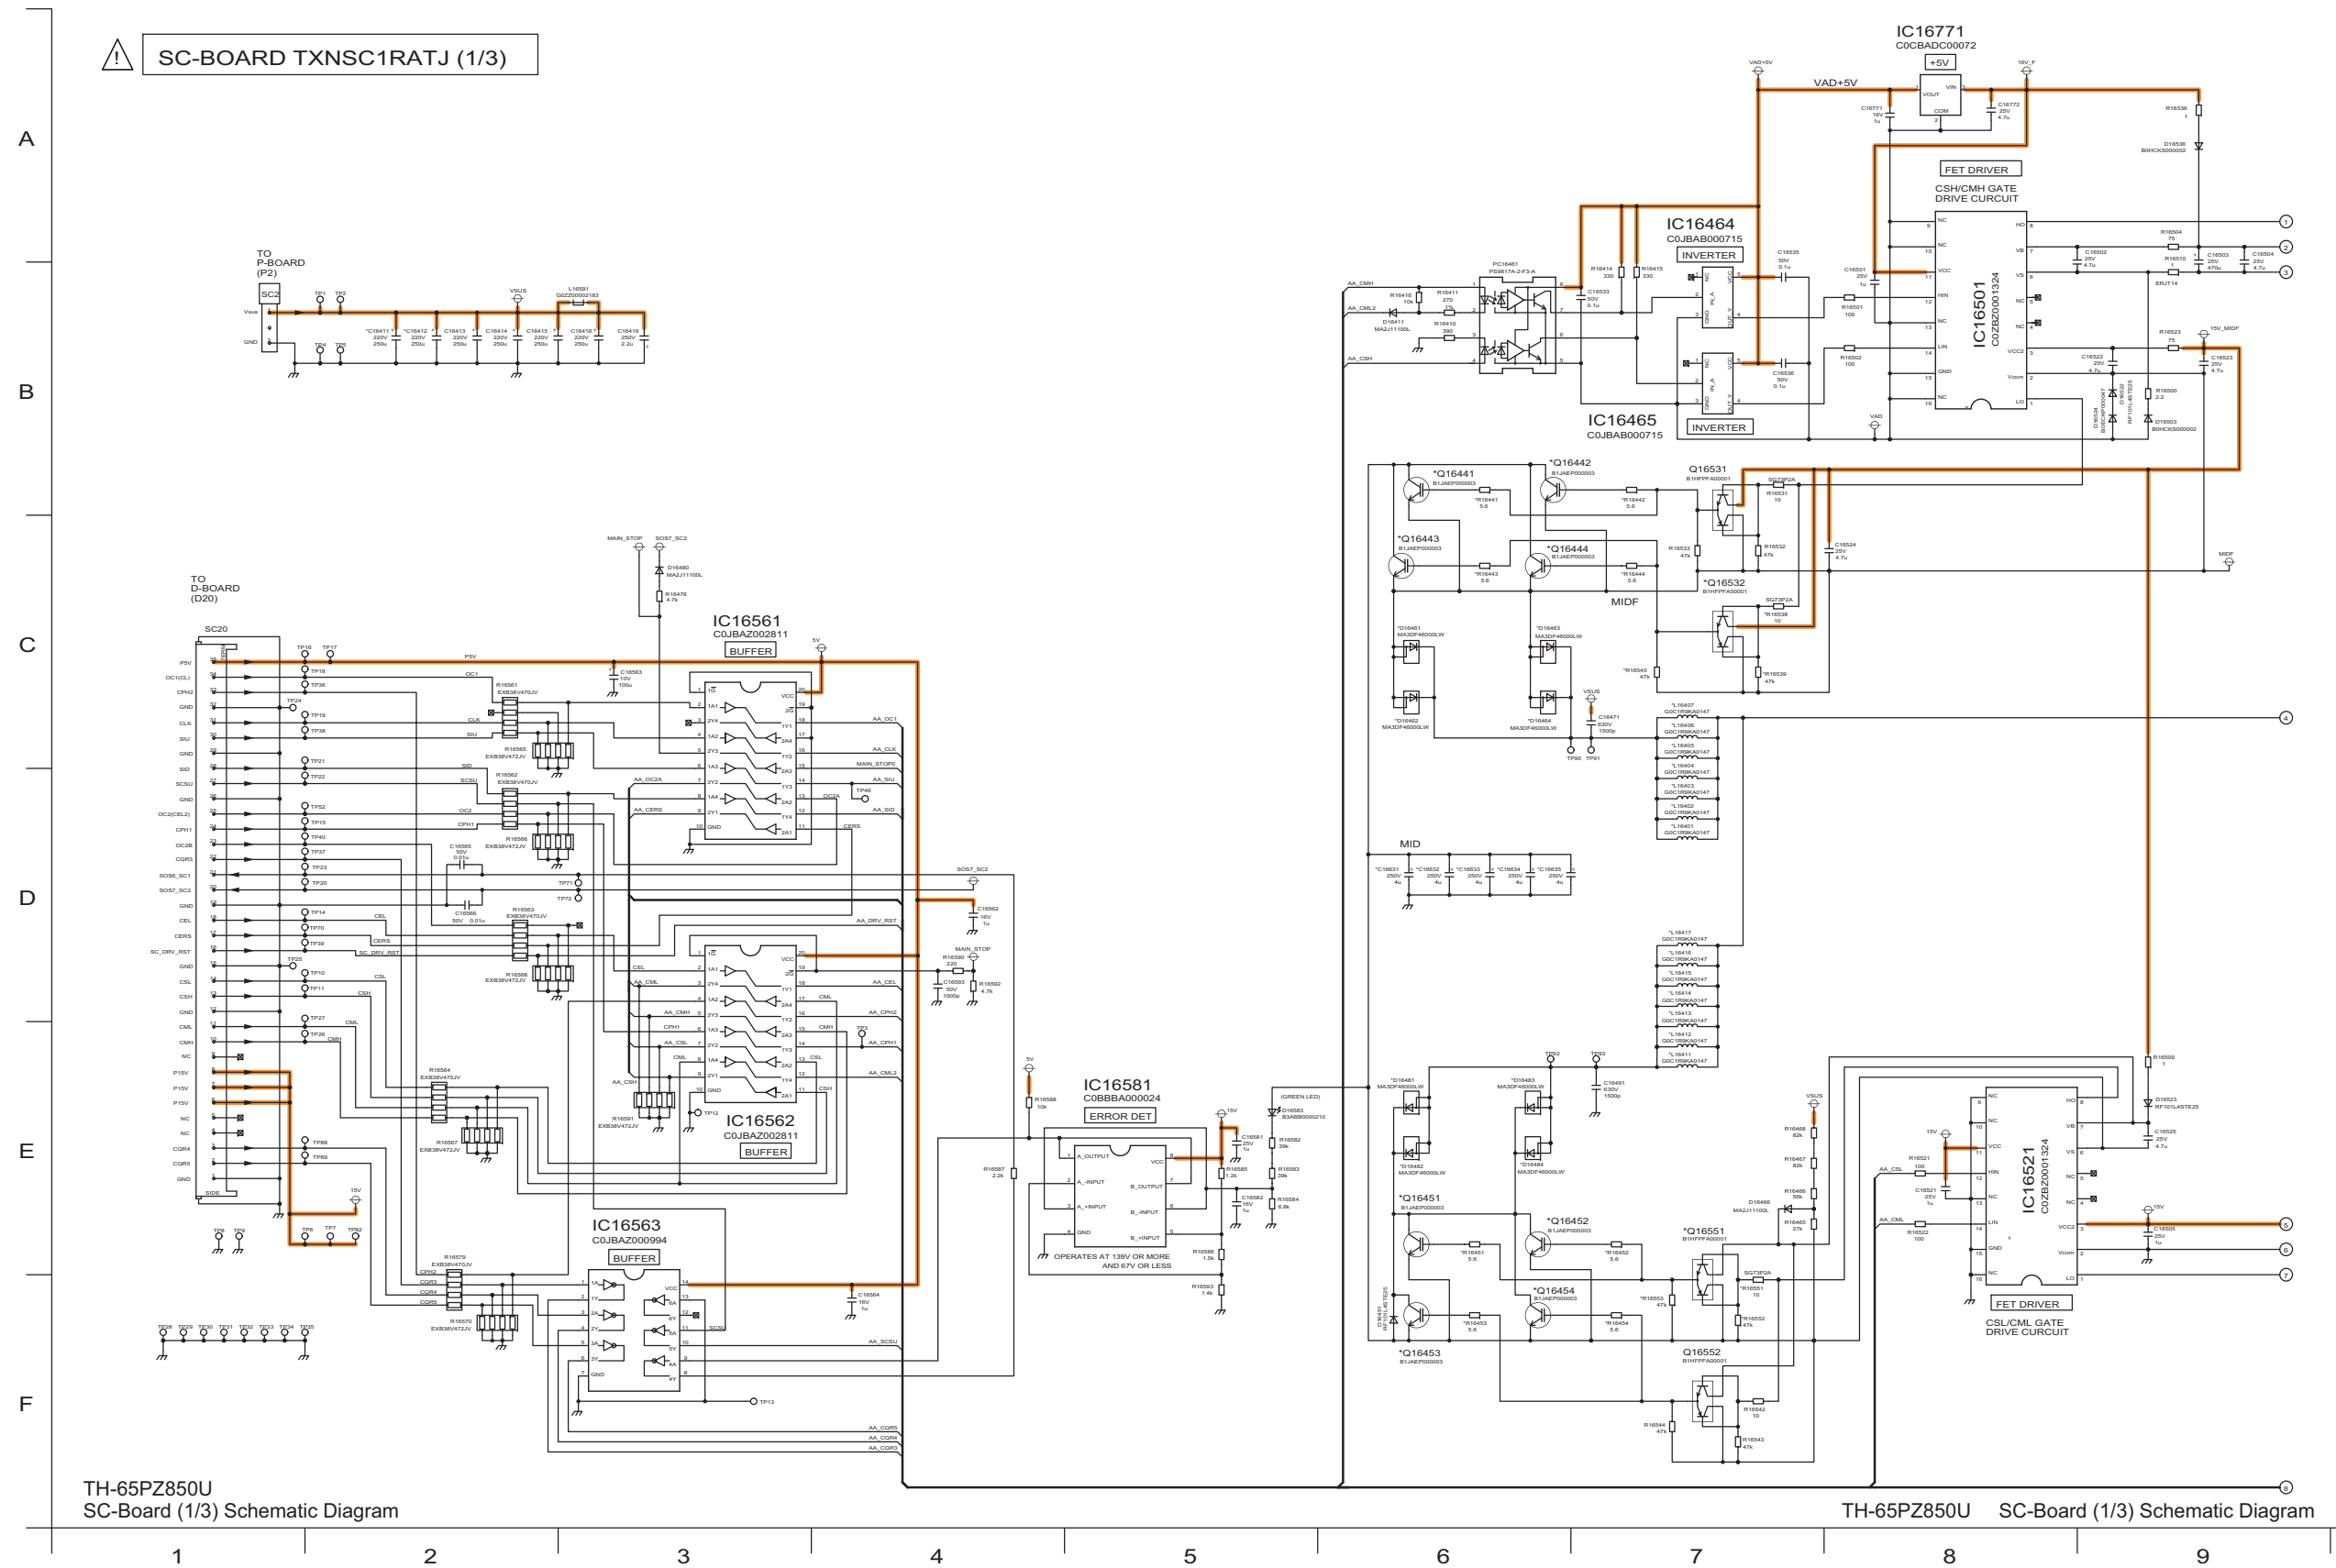


11.46. SC-Board (2/3) Schematic Diagram

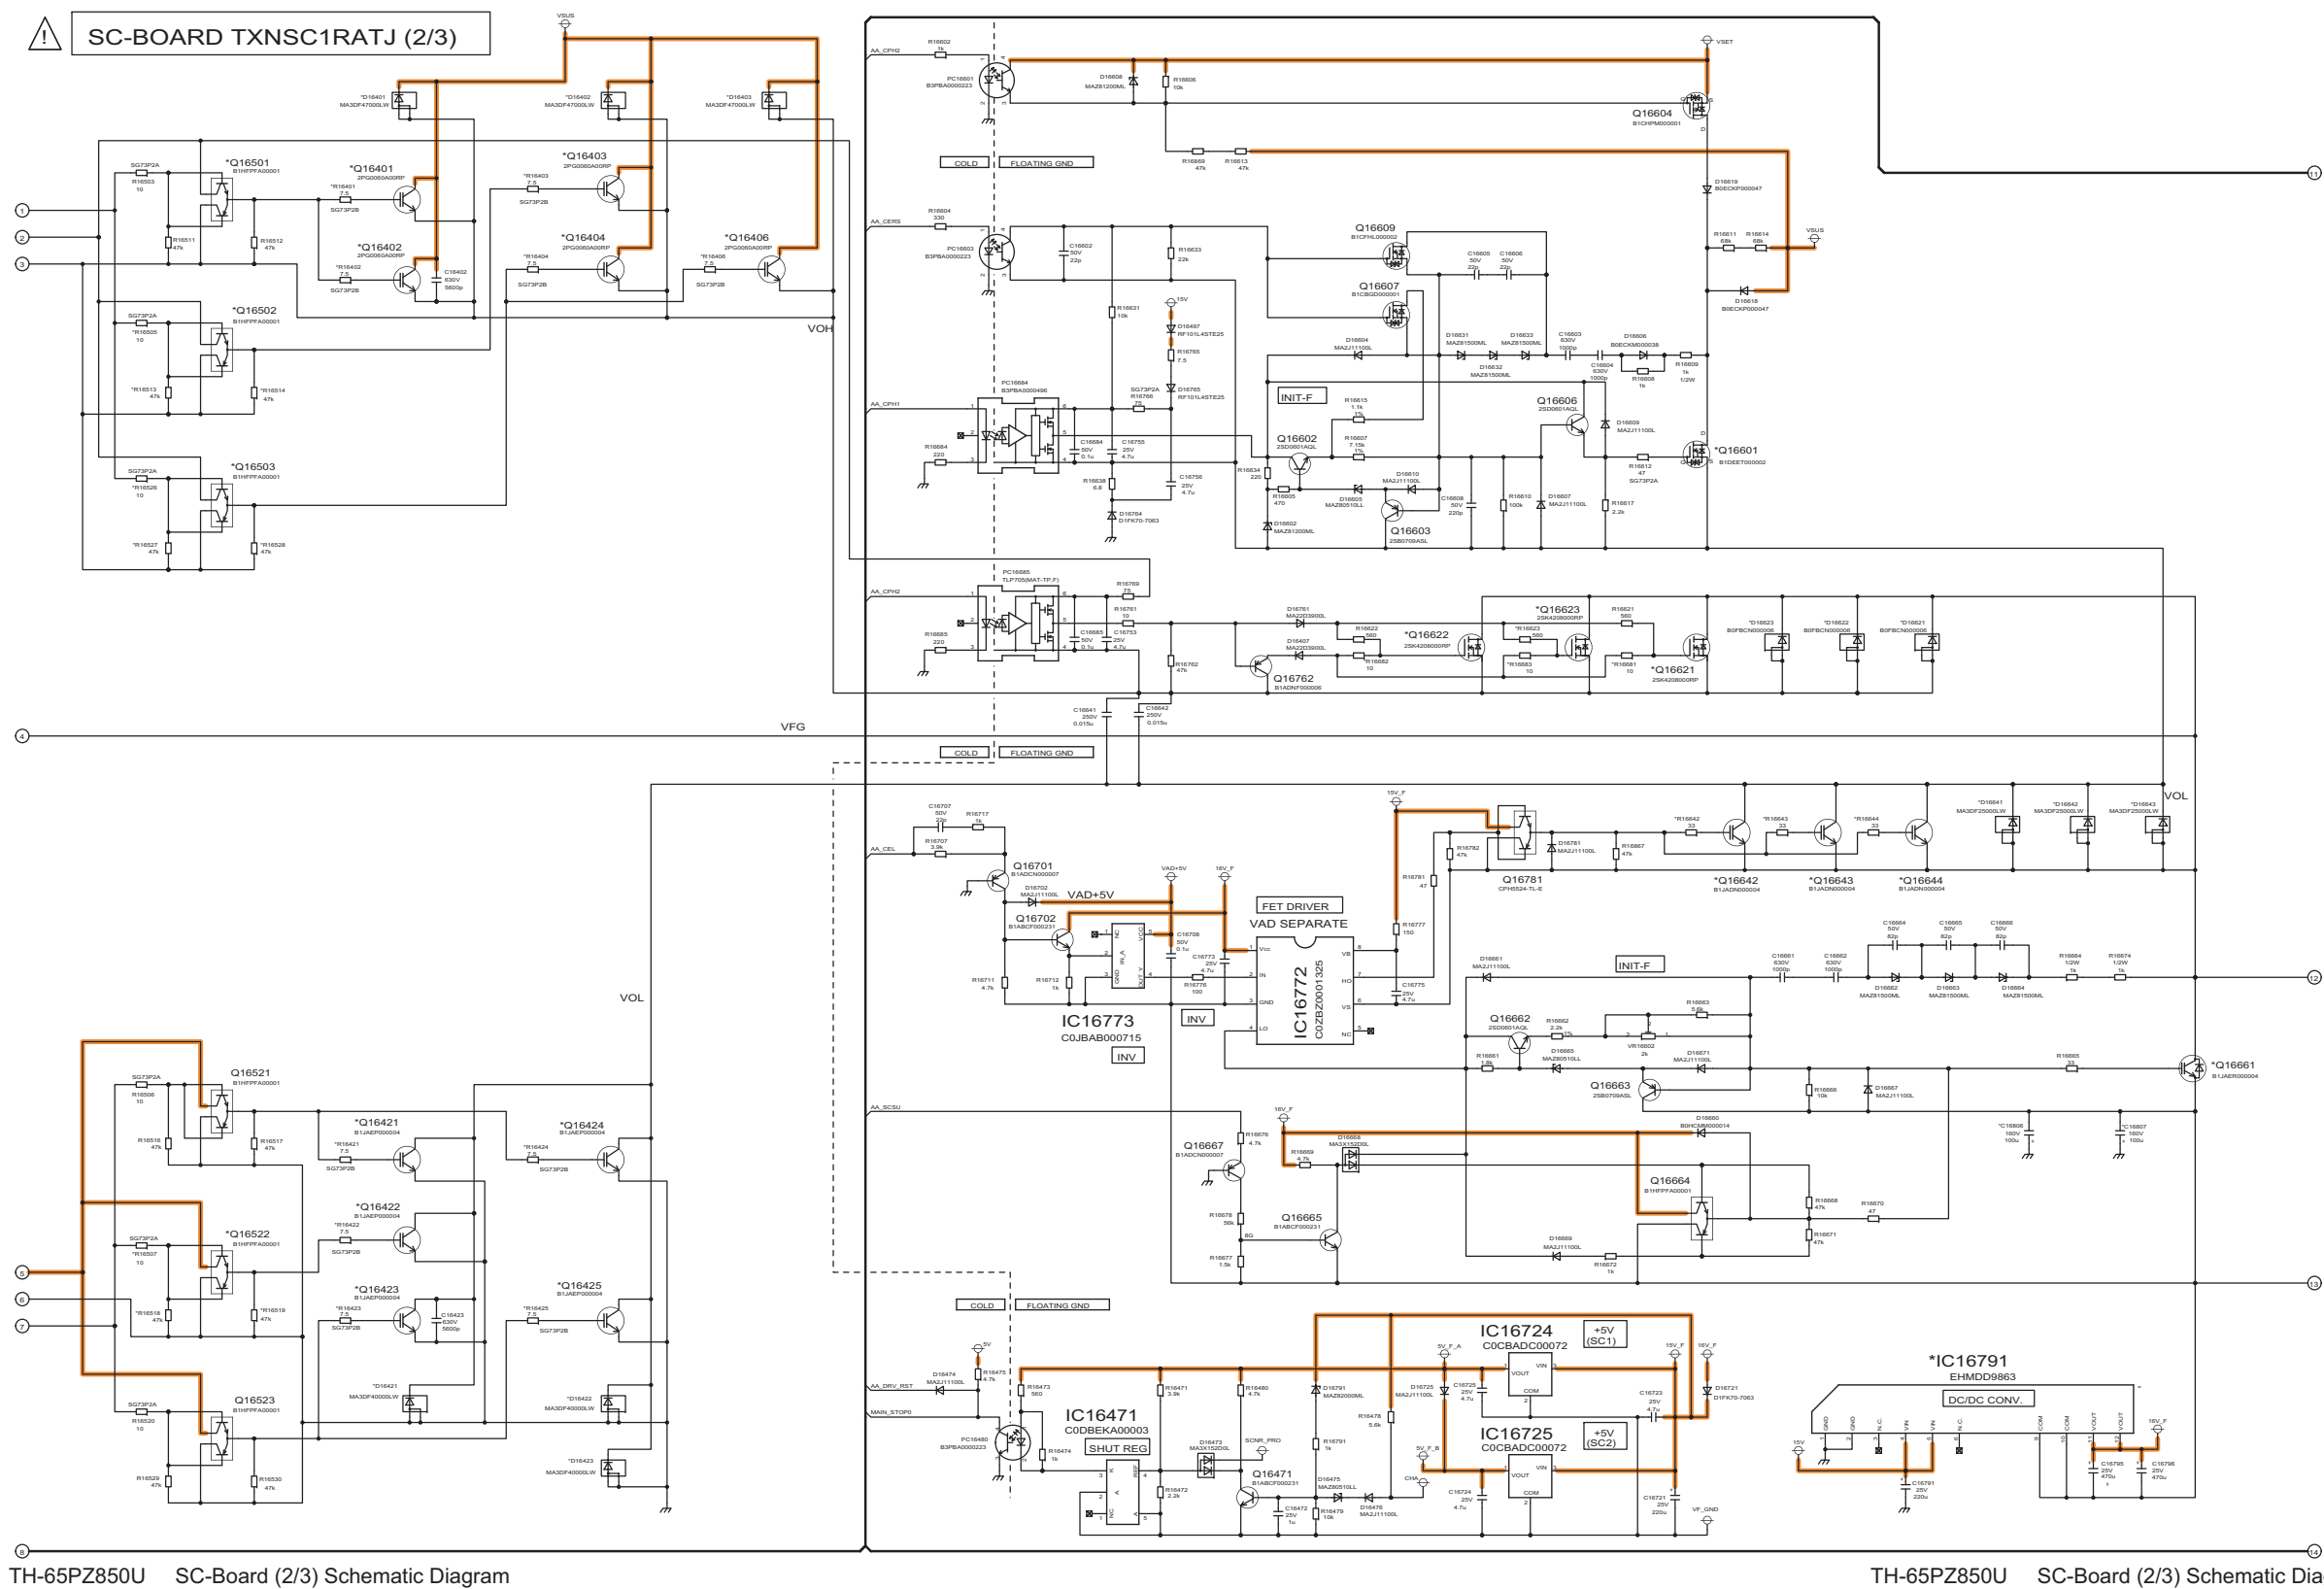

11.47. SC-Board (3/3) Schematic Diagram


SC-BOARD TXNSC1RATJ (3/3)

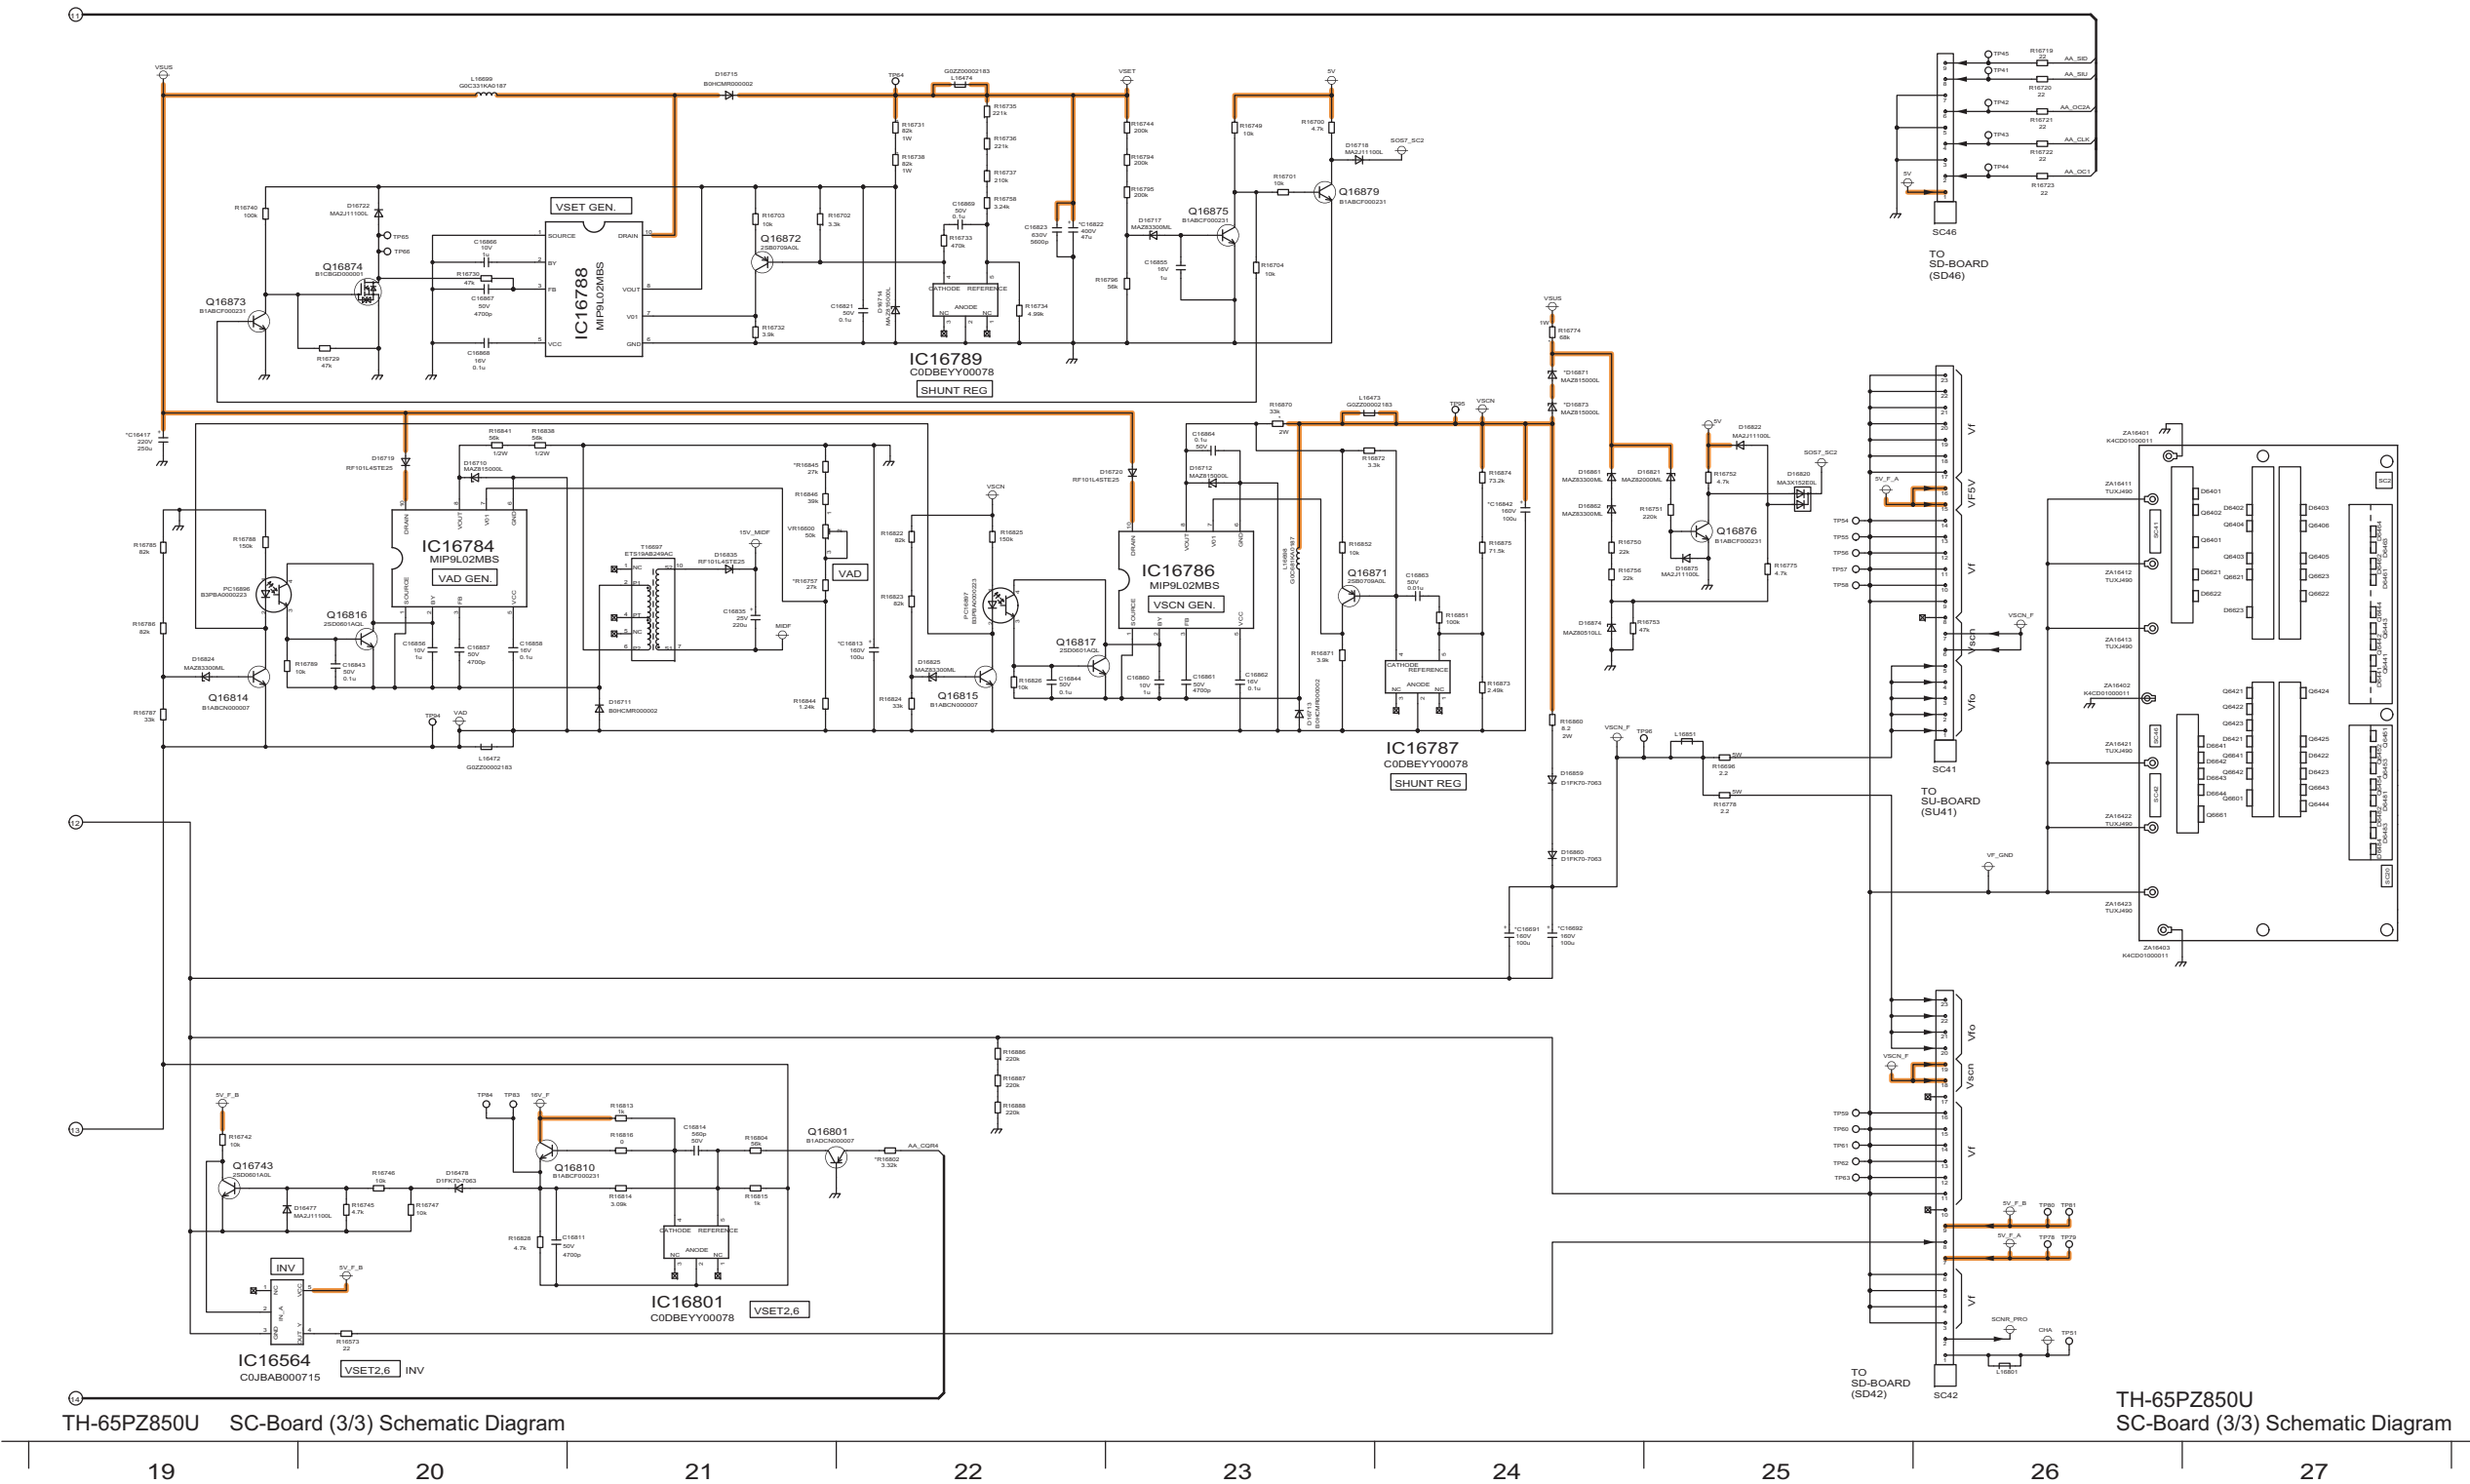


TH-65PZ850U SC-Board (3/3) Schematic Diagram

TH-65PZ850U SC-Board (3/3) Schematic Diagram

11.48. SU-Board (1/3) Schematic Diagram

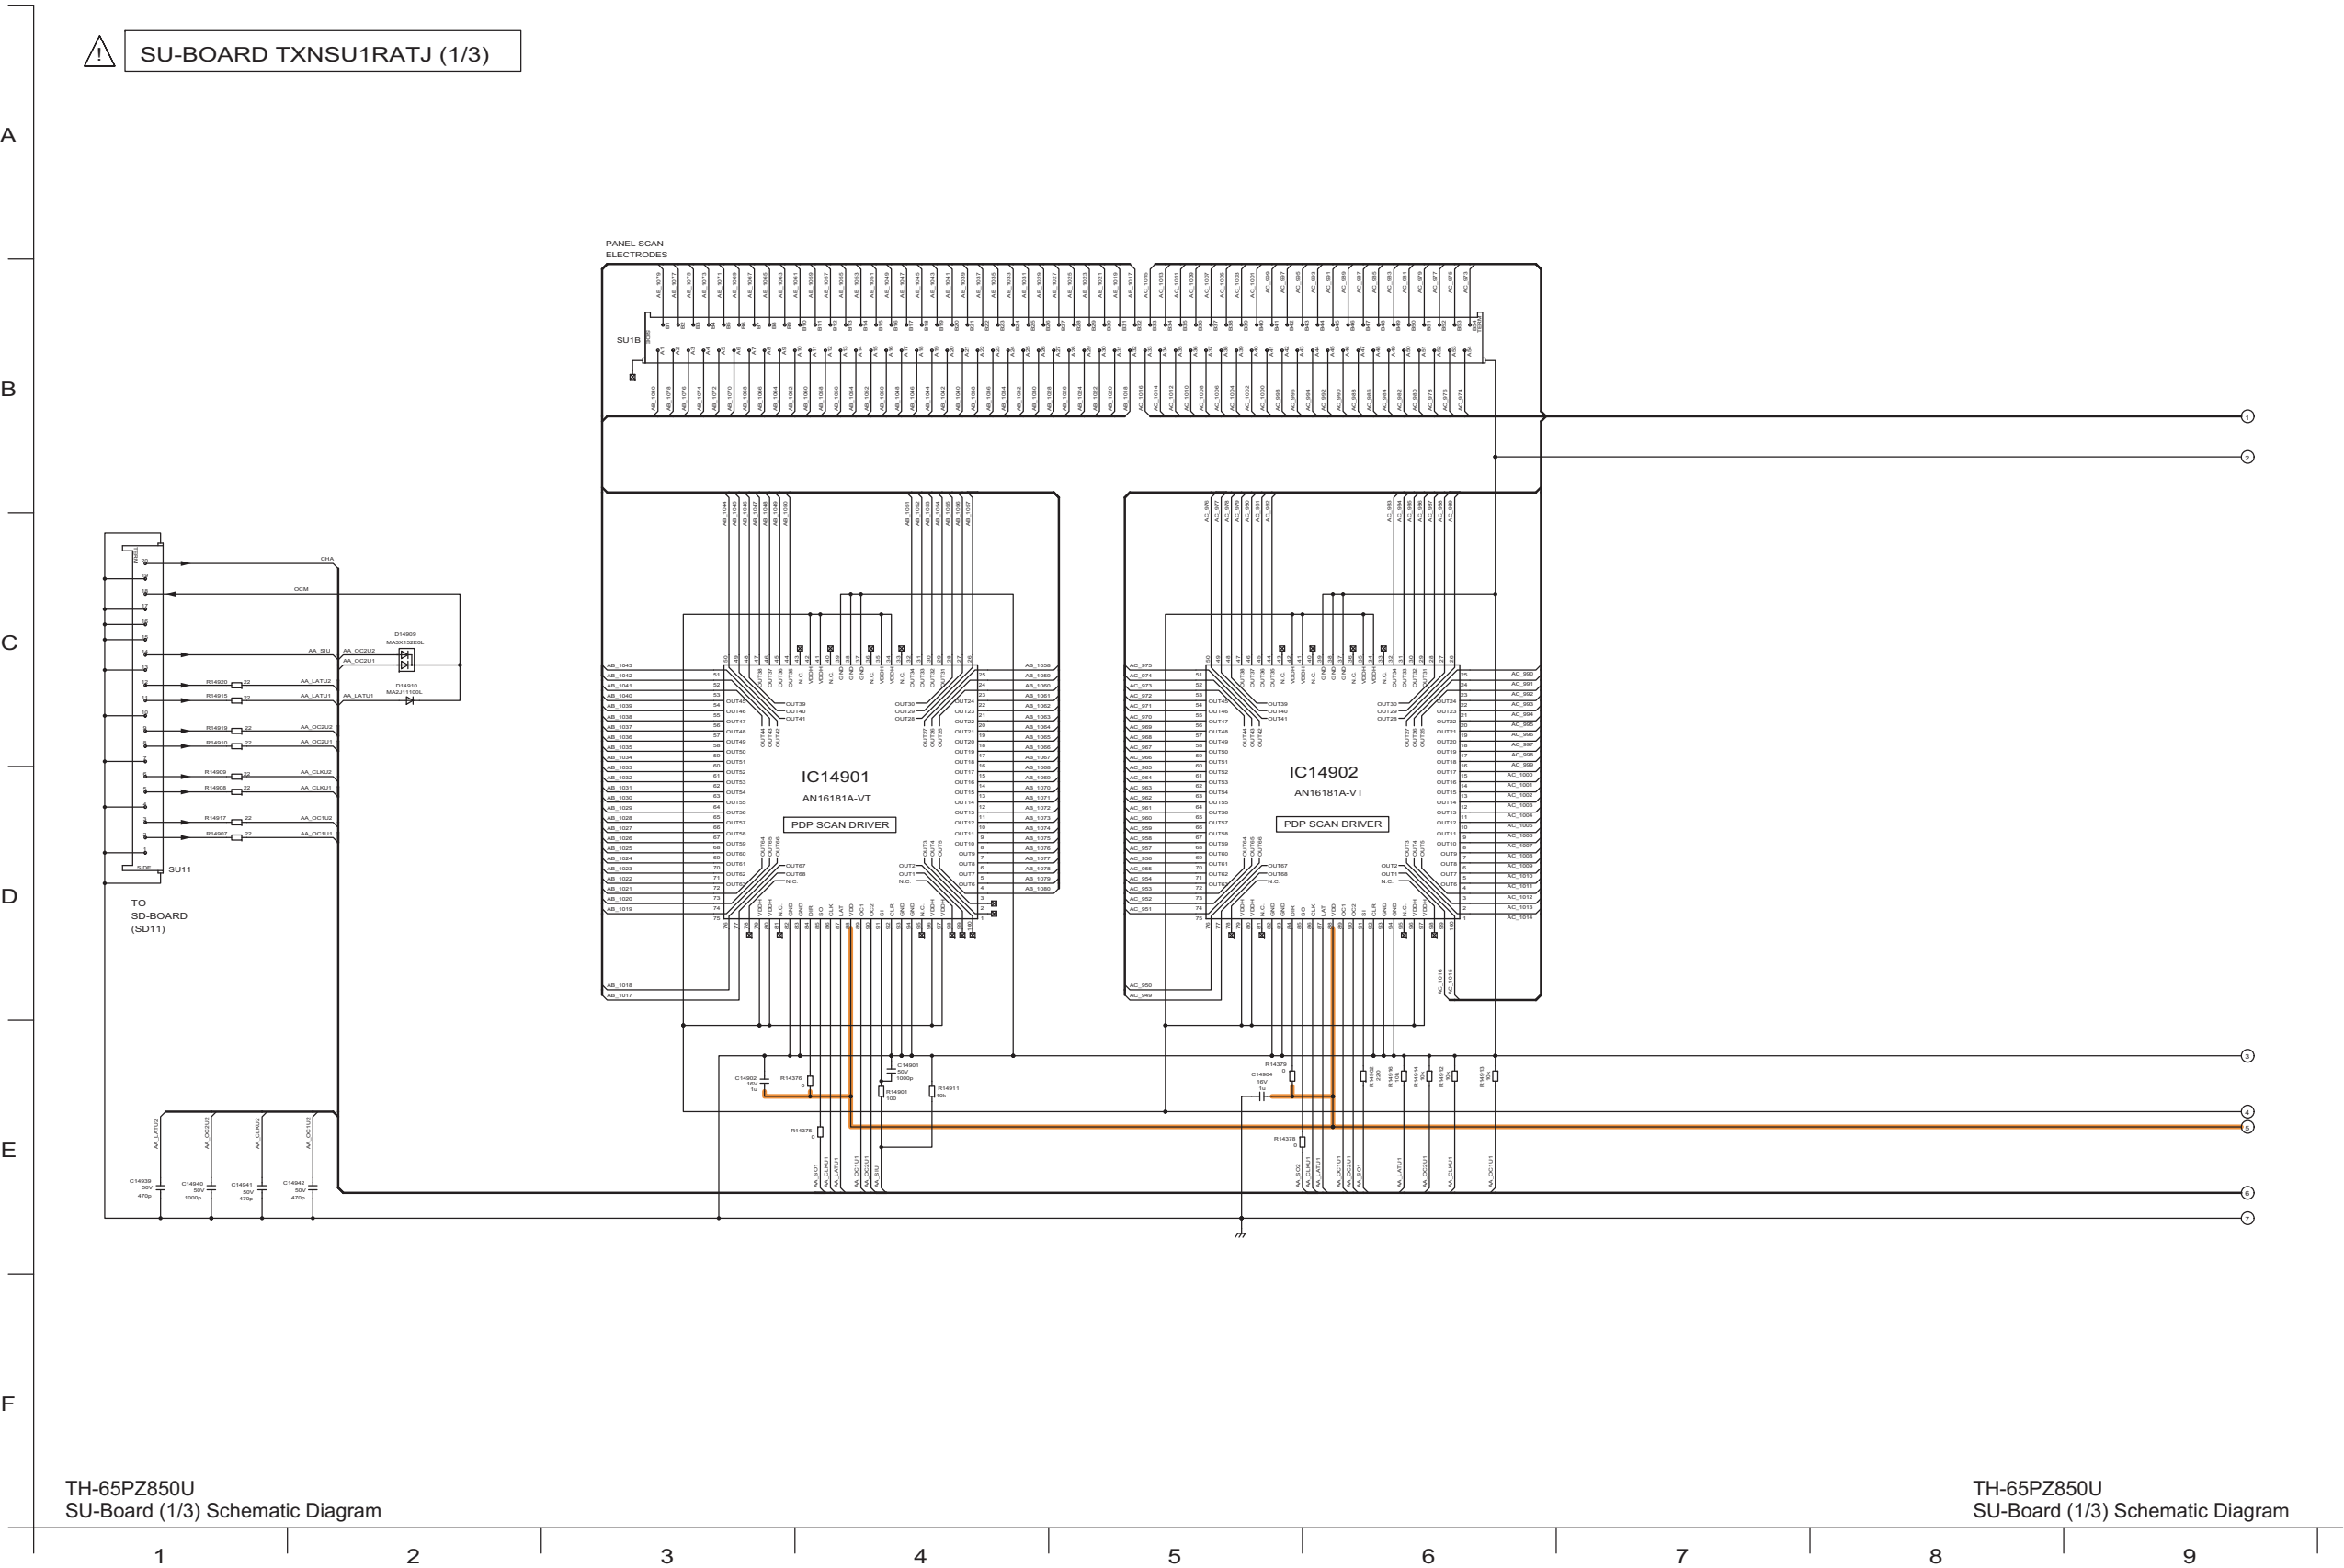


11.49. SU-Board (2/3) Schematic Diagram

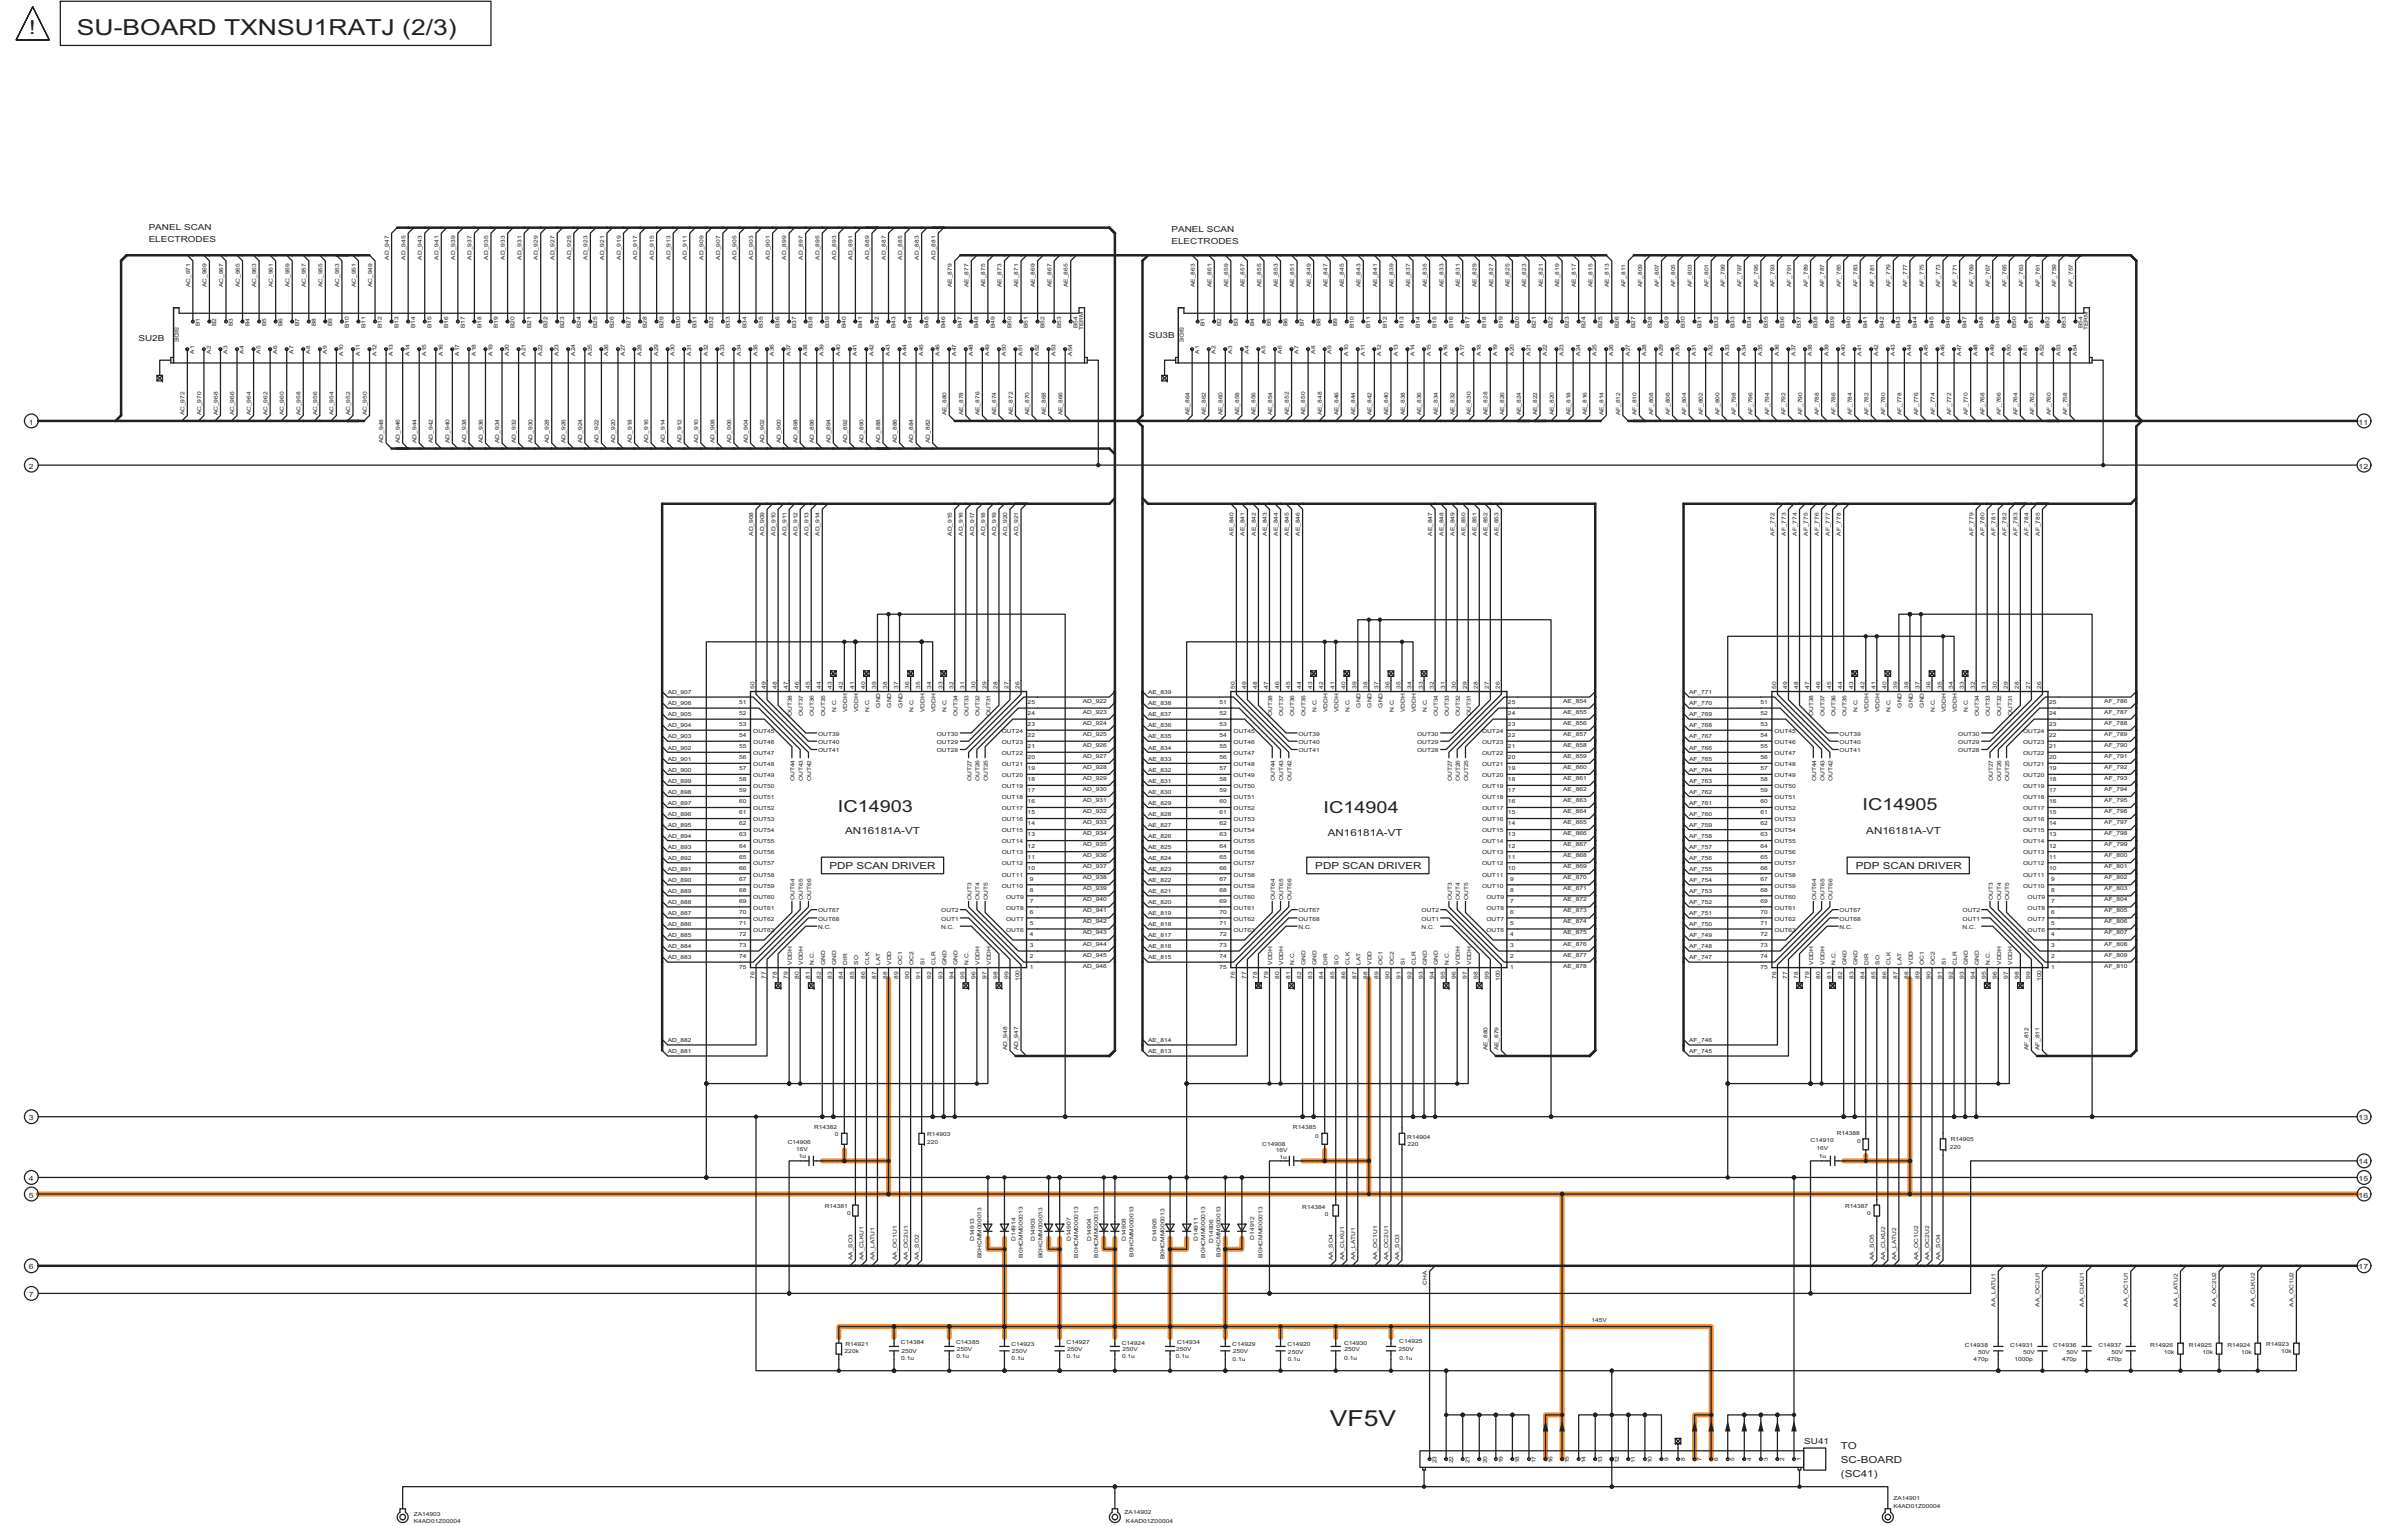


TH-65PZ850U
SU-Board (2/3) Schematic Diagram

TH-65PZ850U
SU-Board (2/3) Schematic Diagram

 SU-BOARD TXNSU1RATJ (3/3)




11.51. SD-Board (1/3) Schematic Diagram

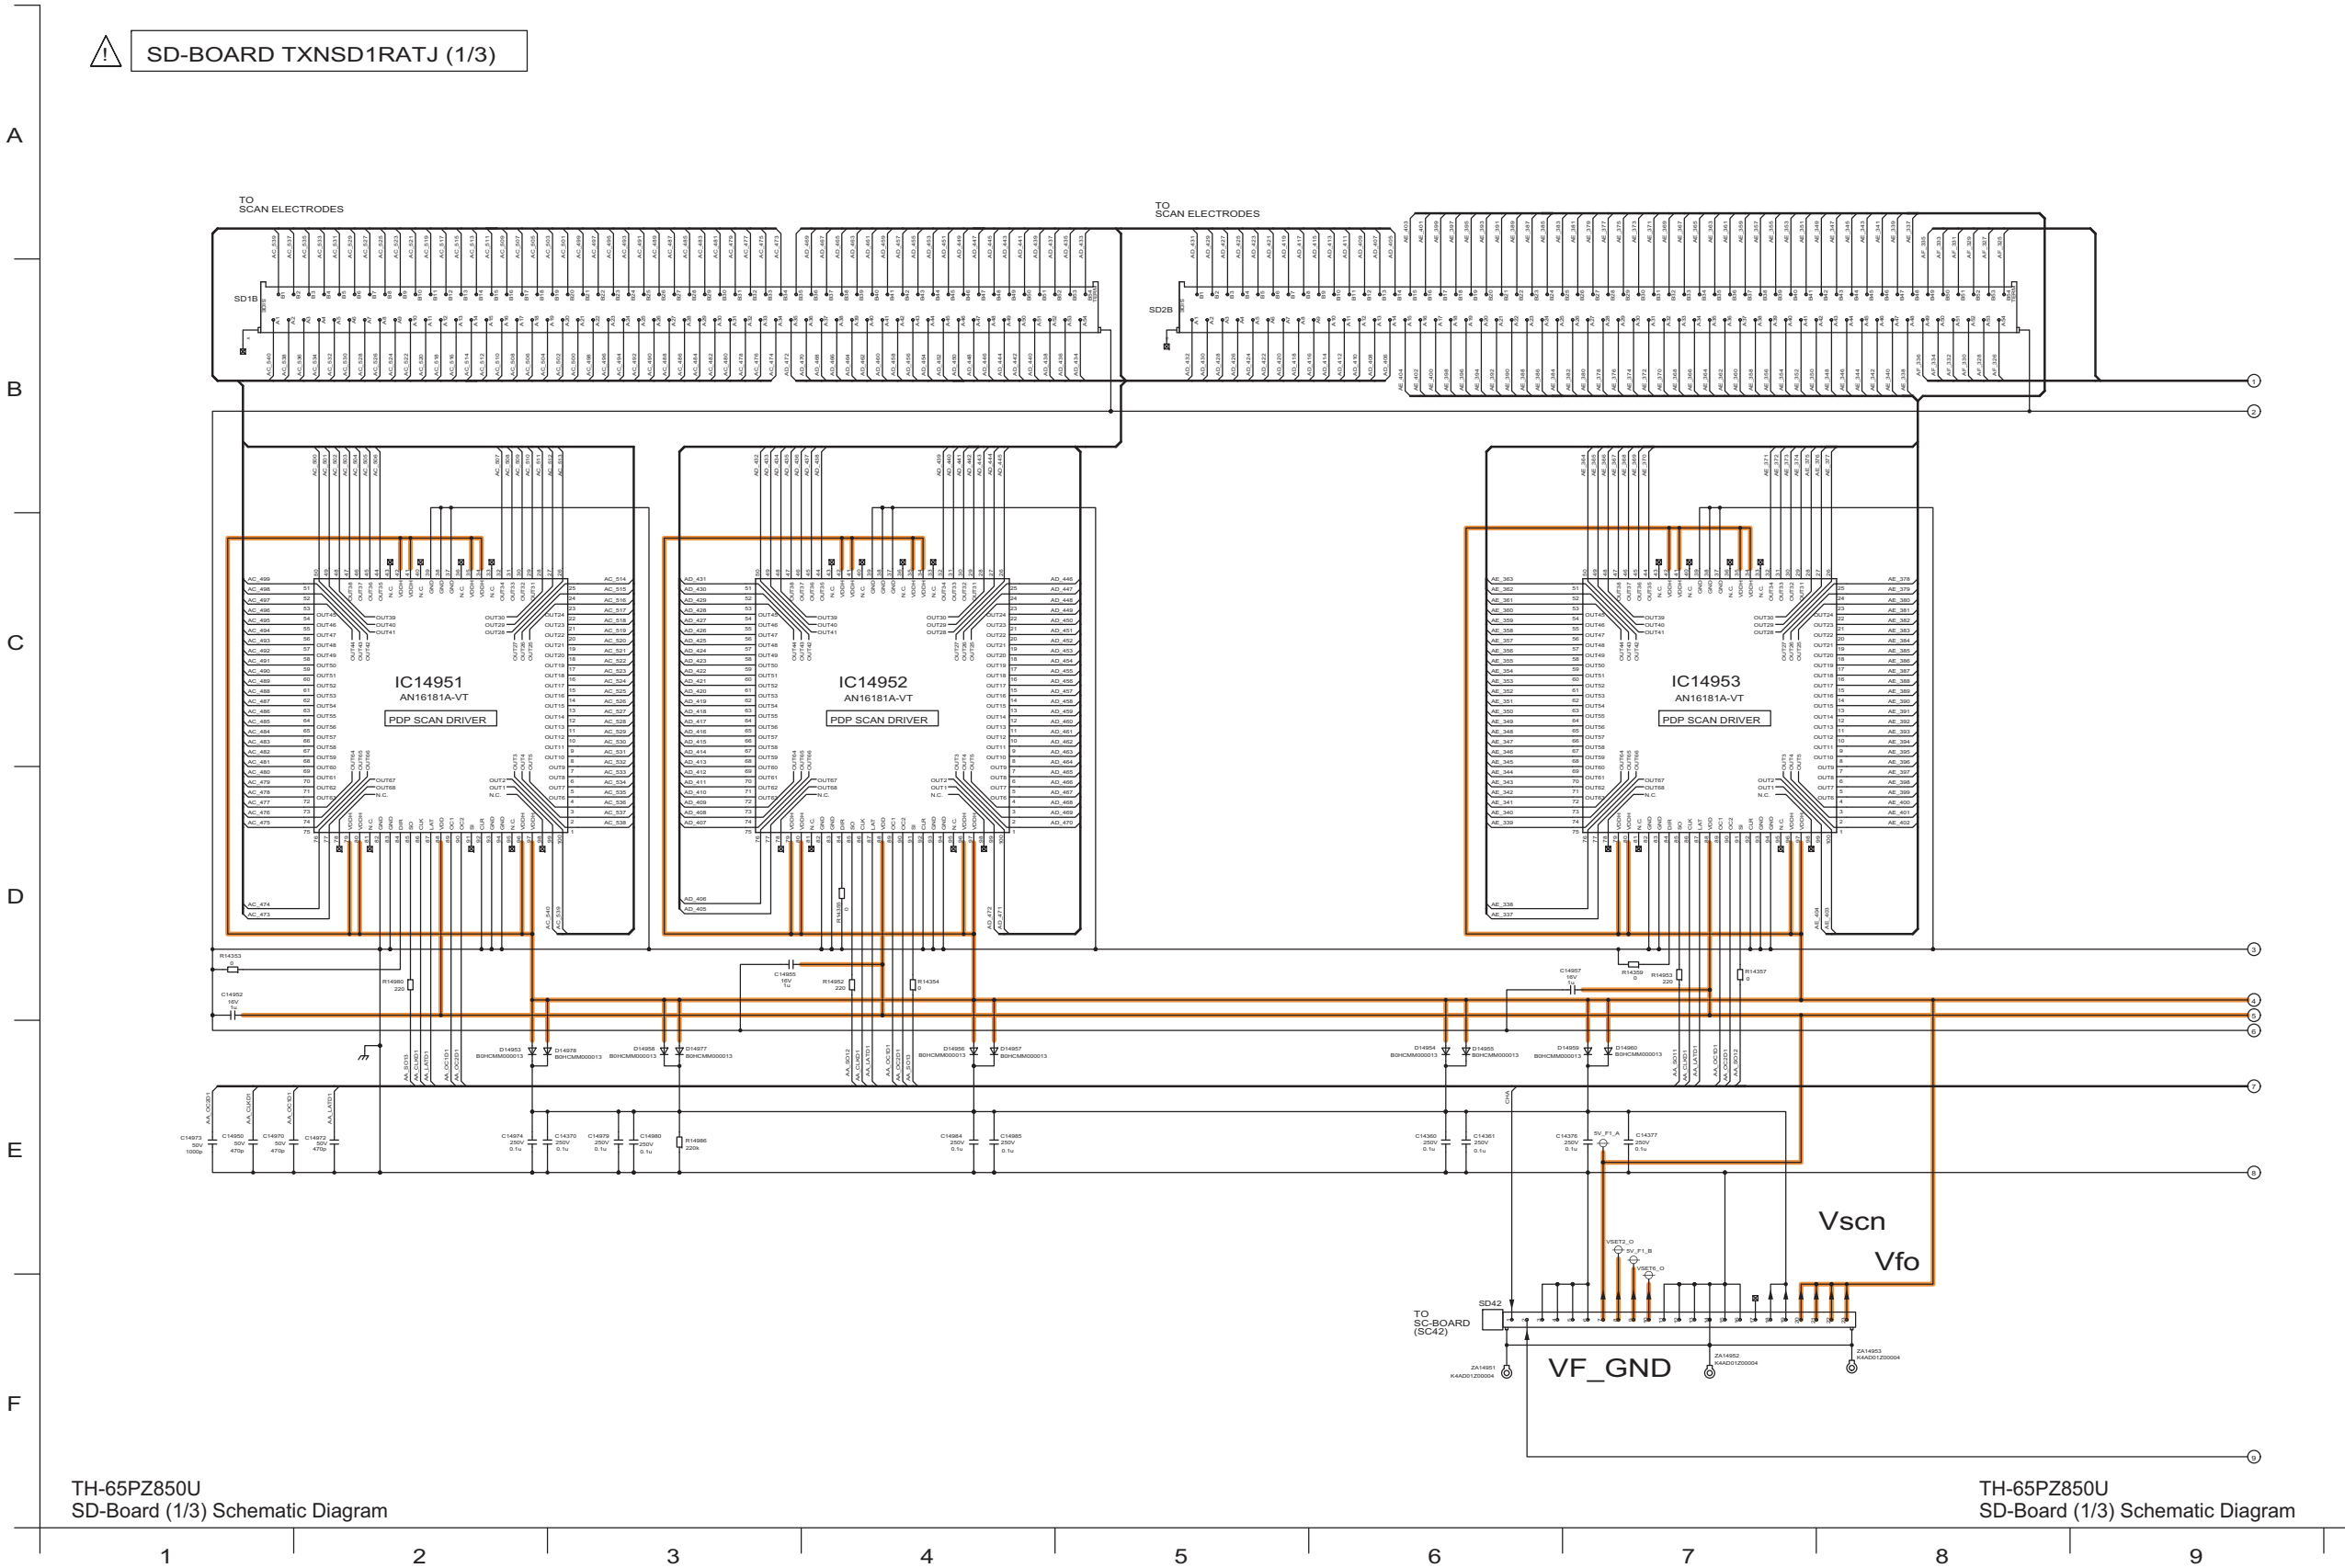

11.52. SD-Board (2/3) Schematic Diagram

SD-BOARD TXNSD1RATJ (2/3)

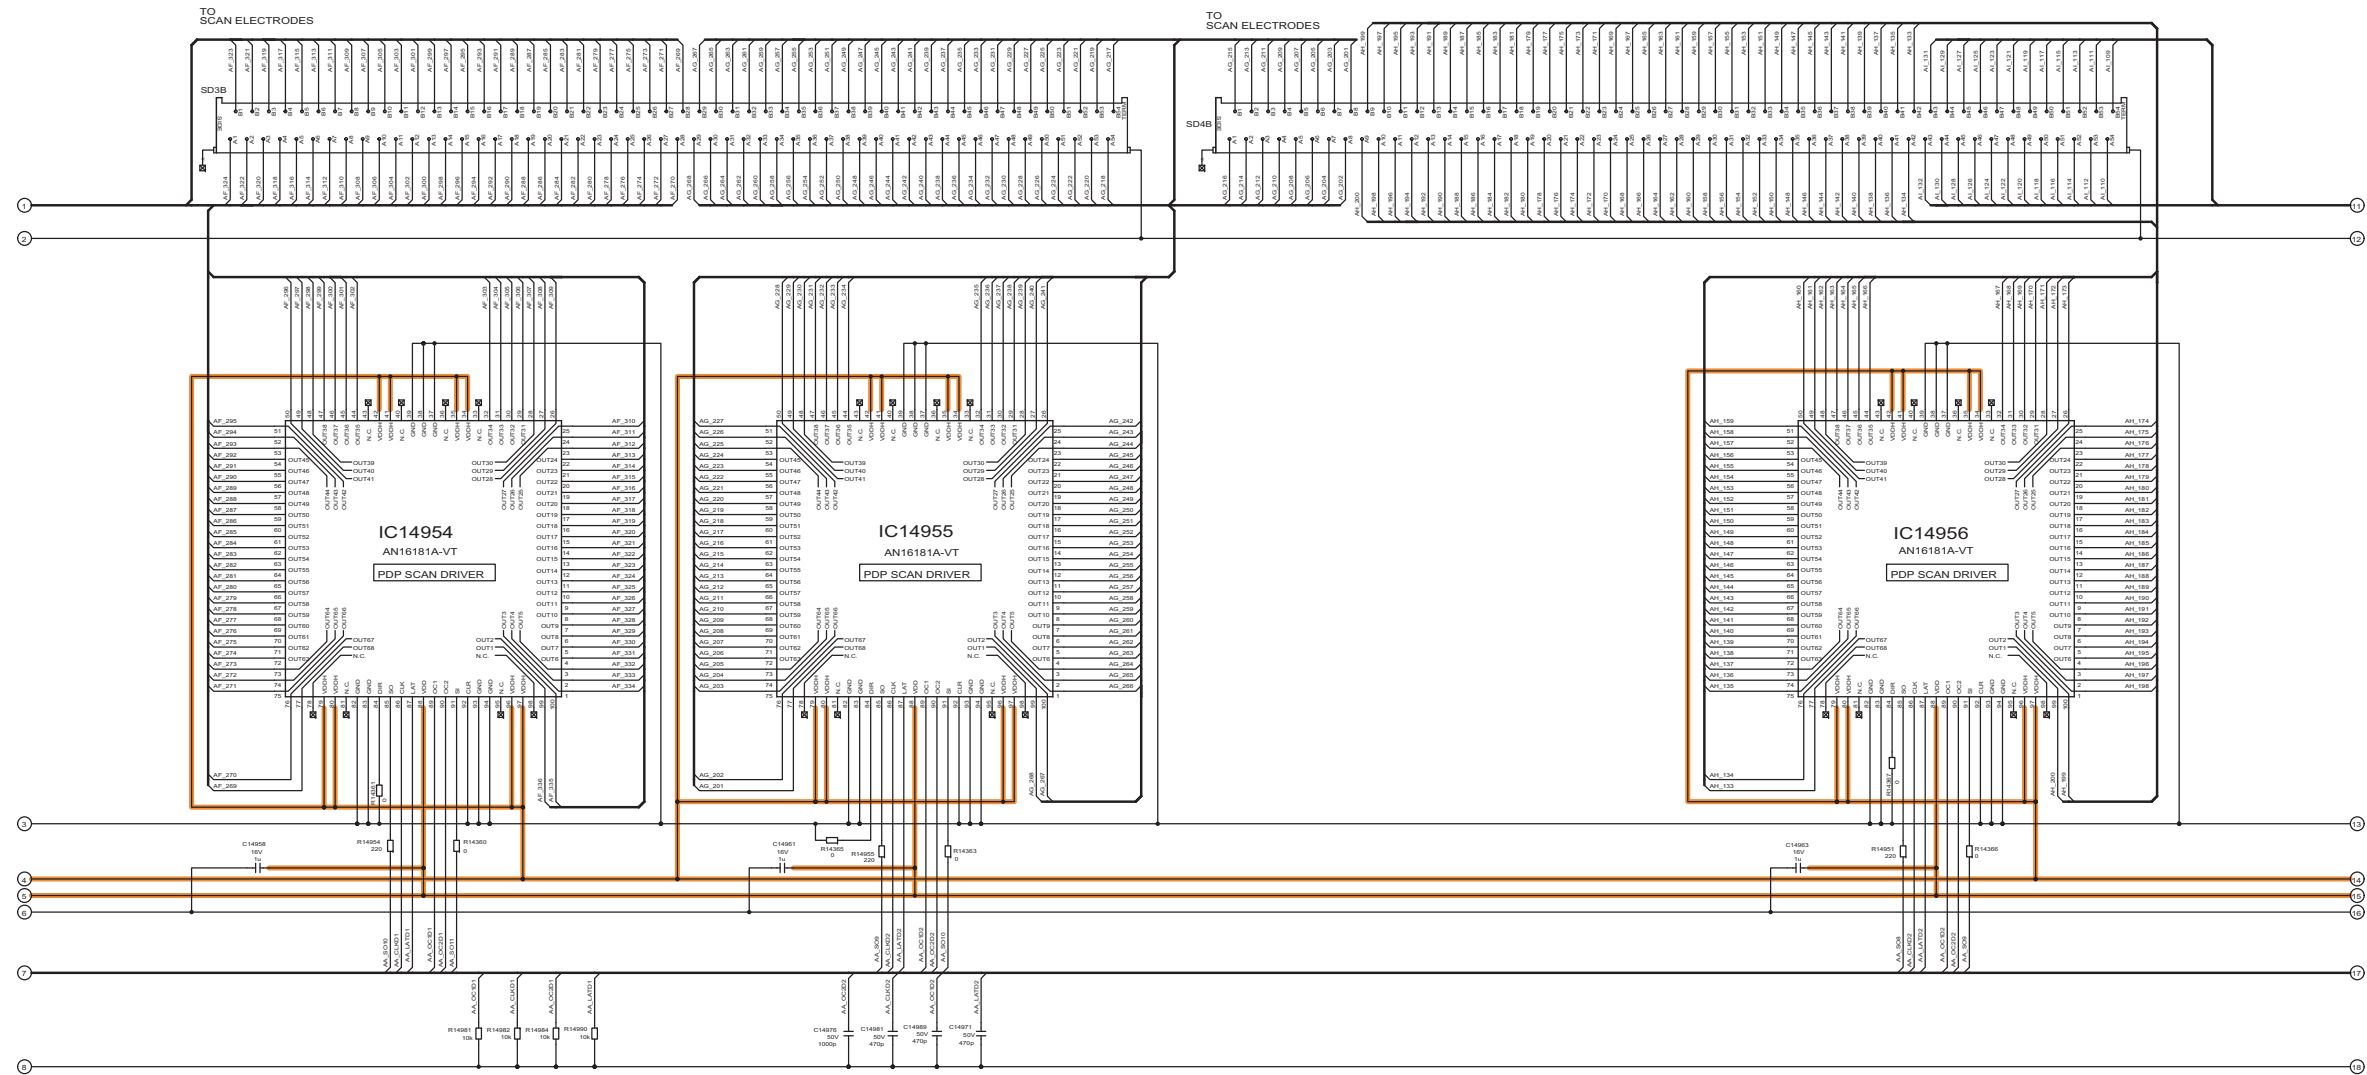


TH-65PZ850U
SD-Board (2/3) Schematic Diagram

TH-65PZ850U
SD-Board (2/3) Schematic Diagram

11.53. SD-Board (3/3) Schematic Diagram


SD-BOARD TXNSD1RATJ (3/3)

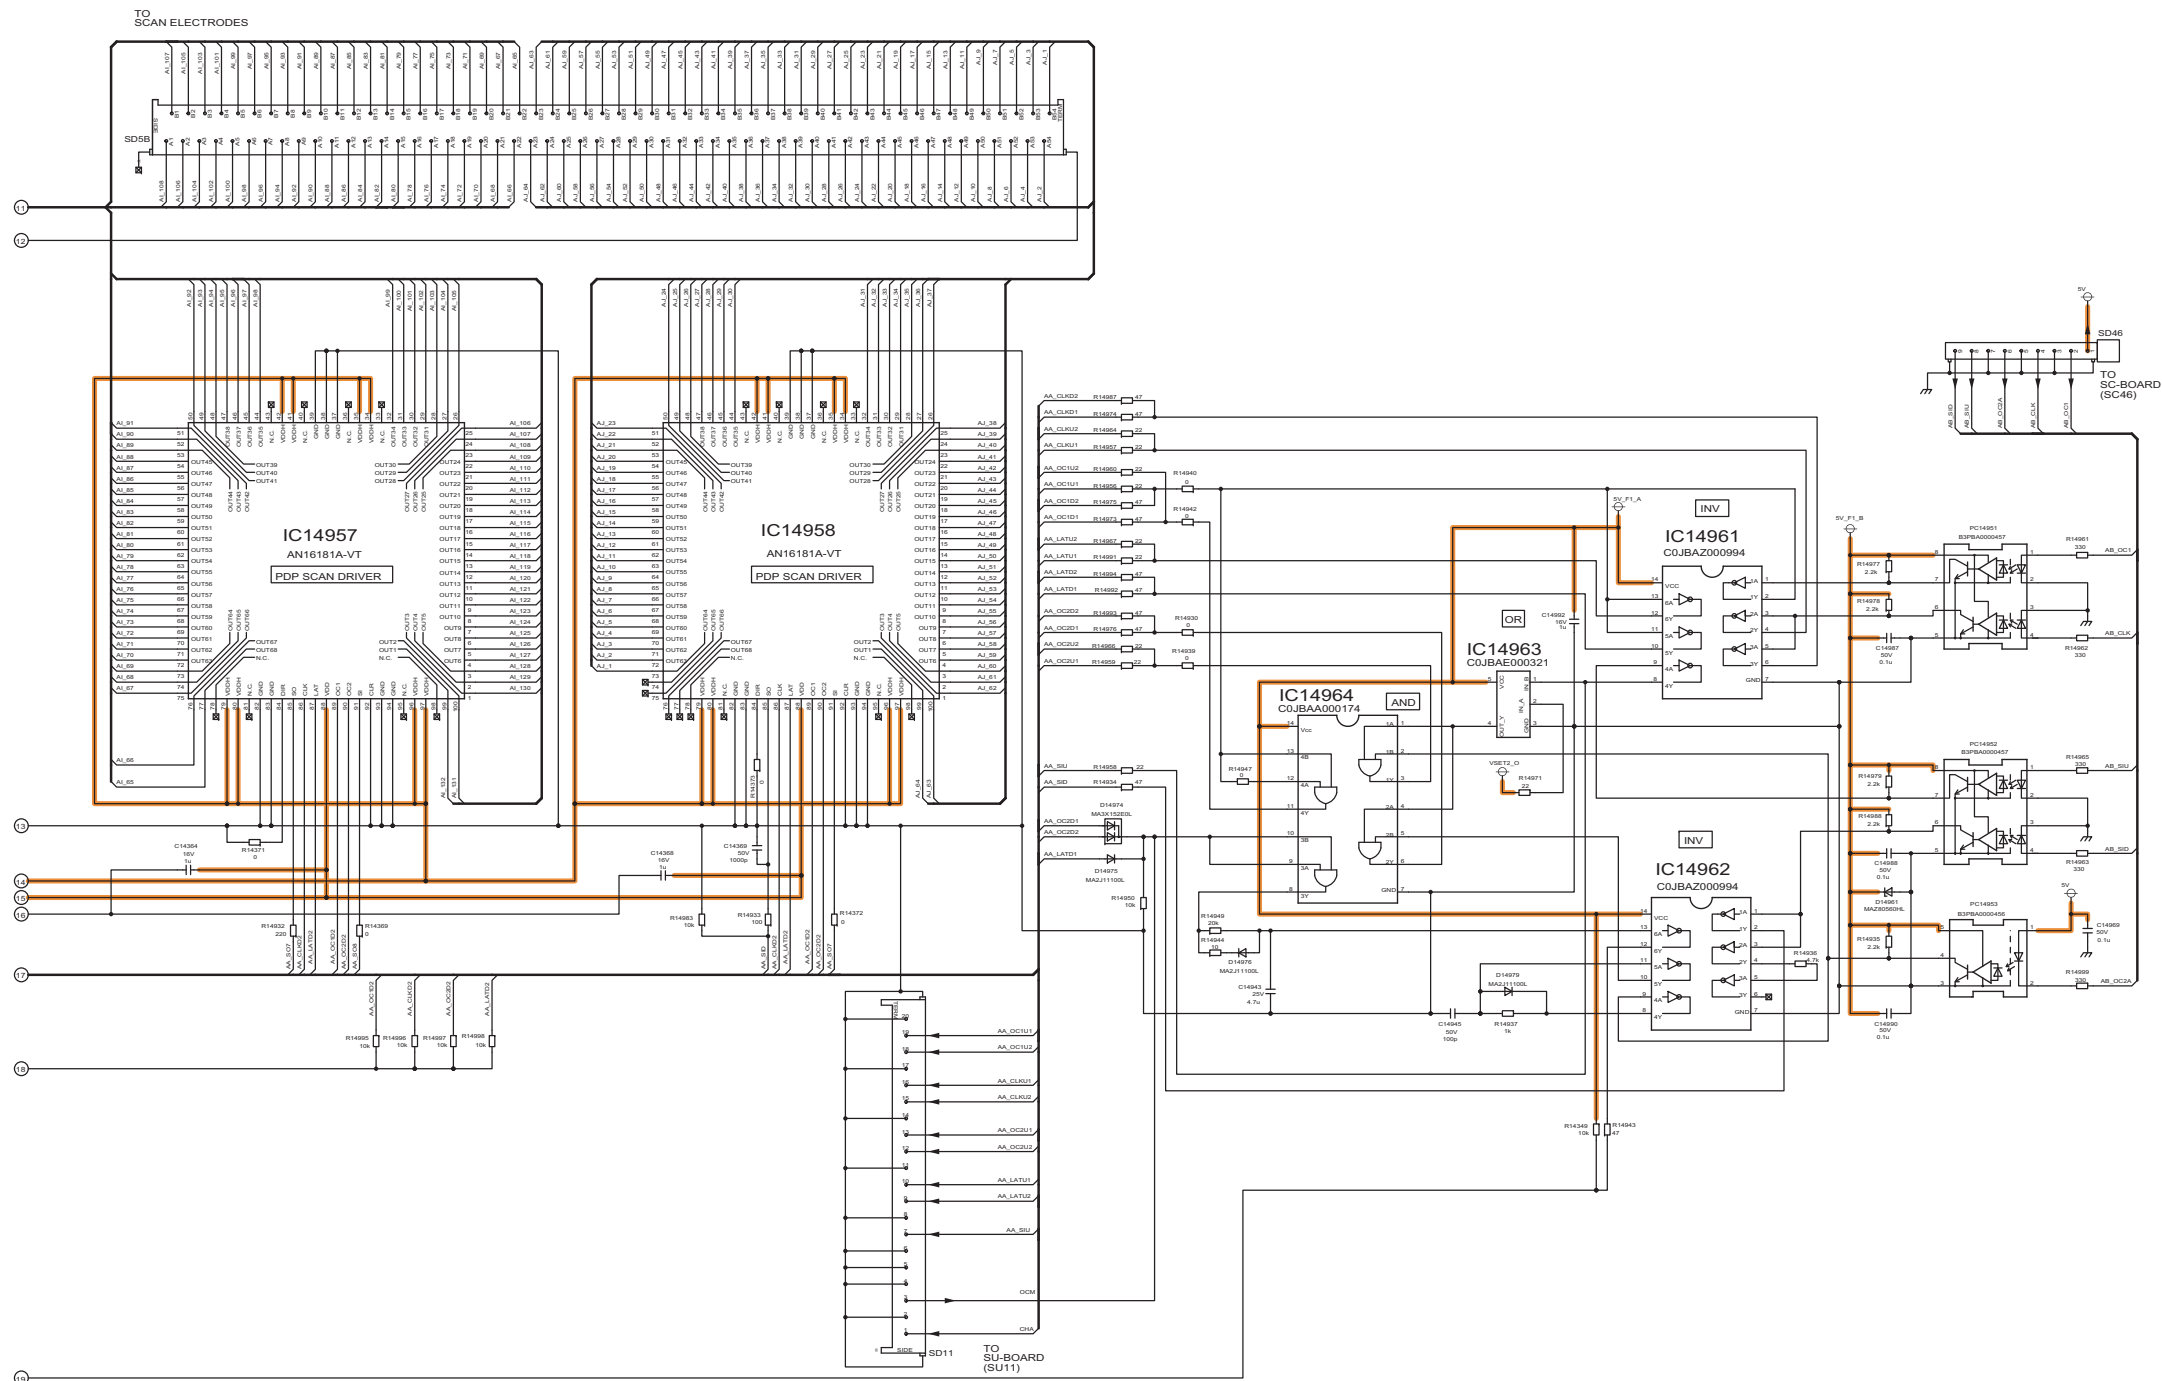


TH-65PZ850U
SD-Board (3/3) Schematic Diagram

TH-65PZ850U
SD-Board (3/3) Schematic Diagram

11.54. SS-Board (1/2) Schematic Diagram

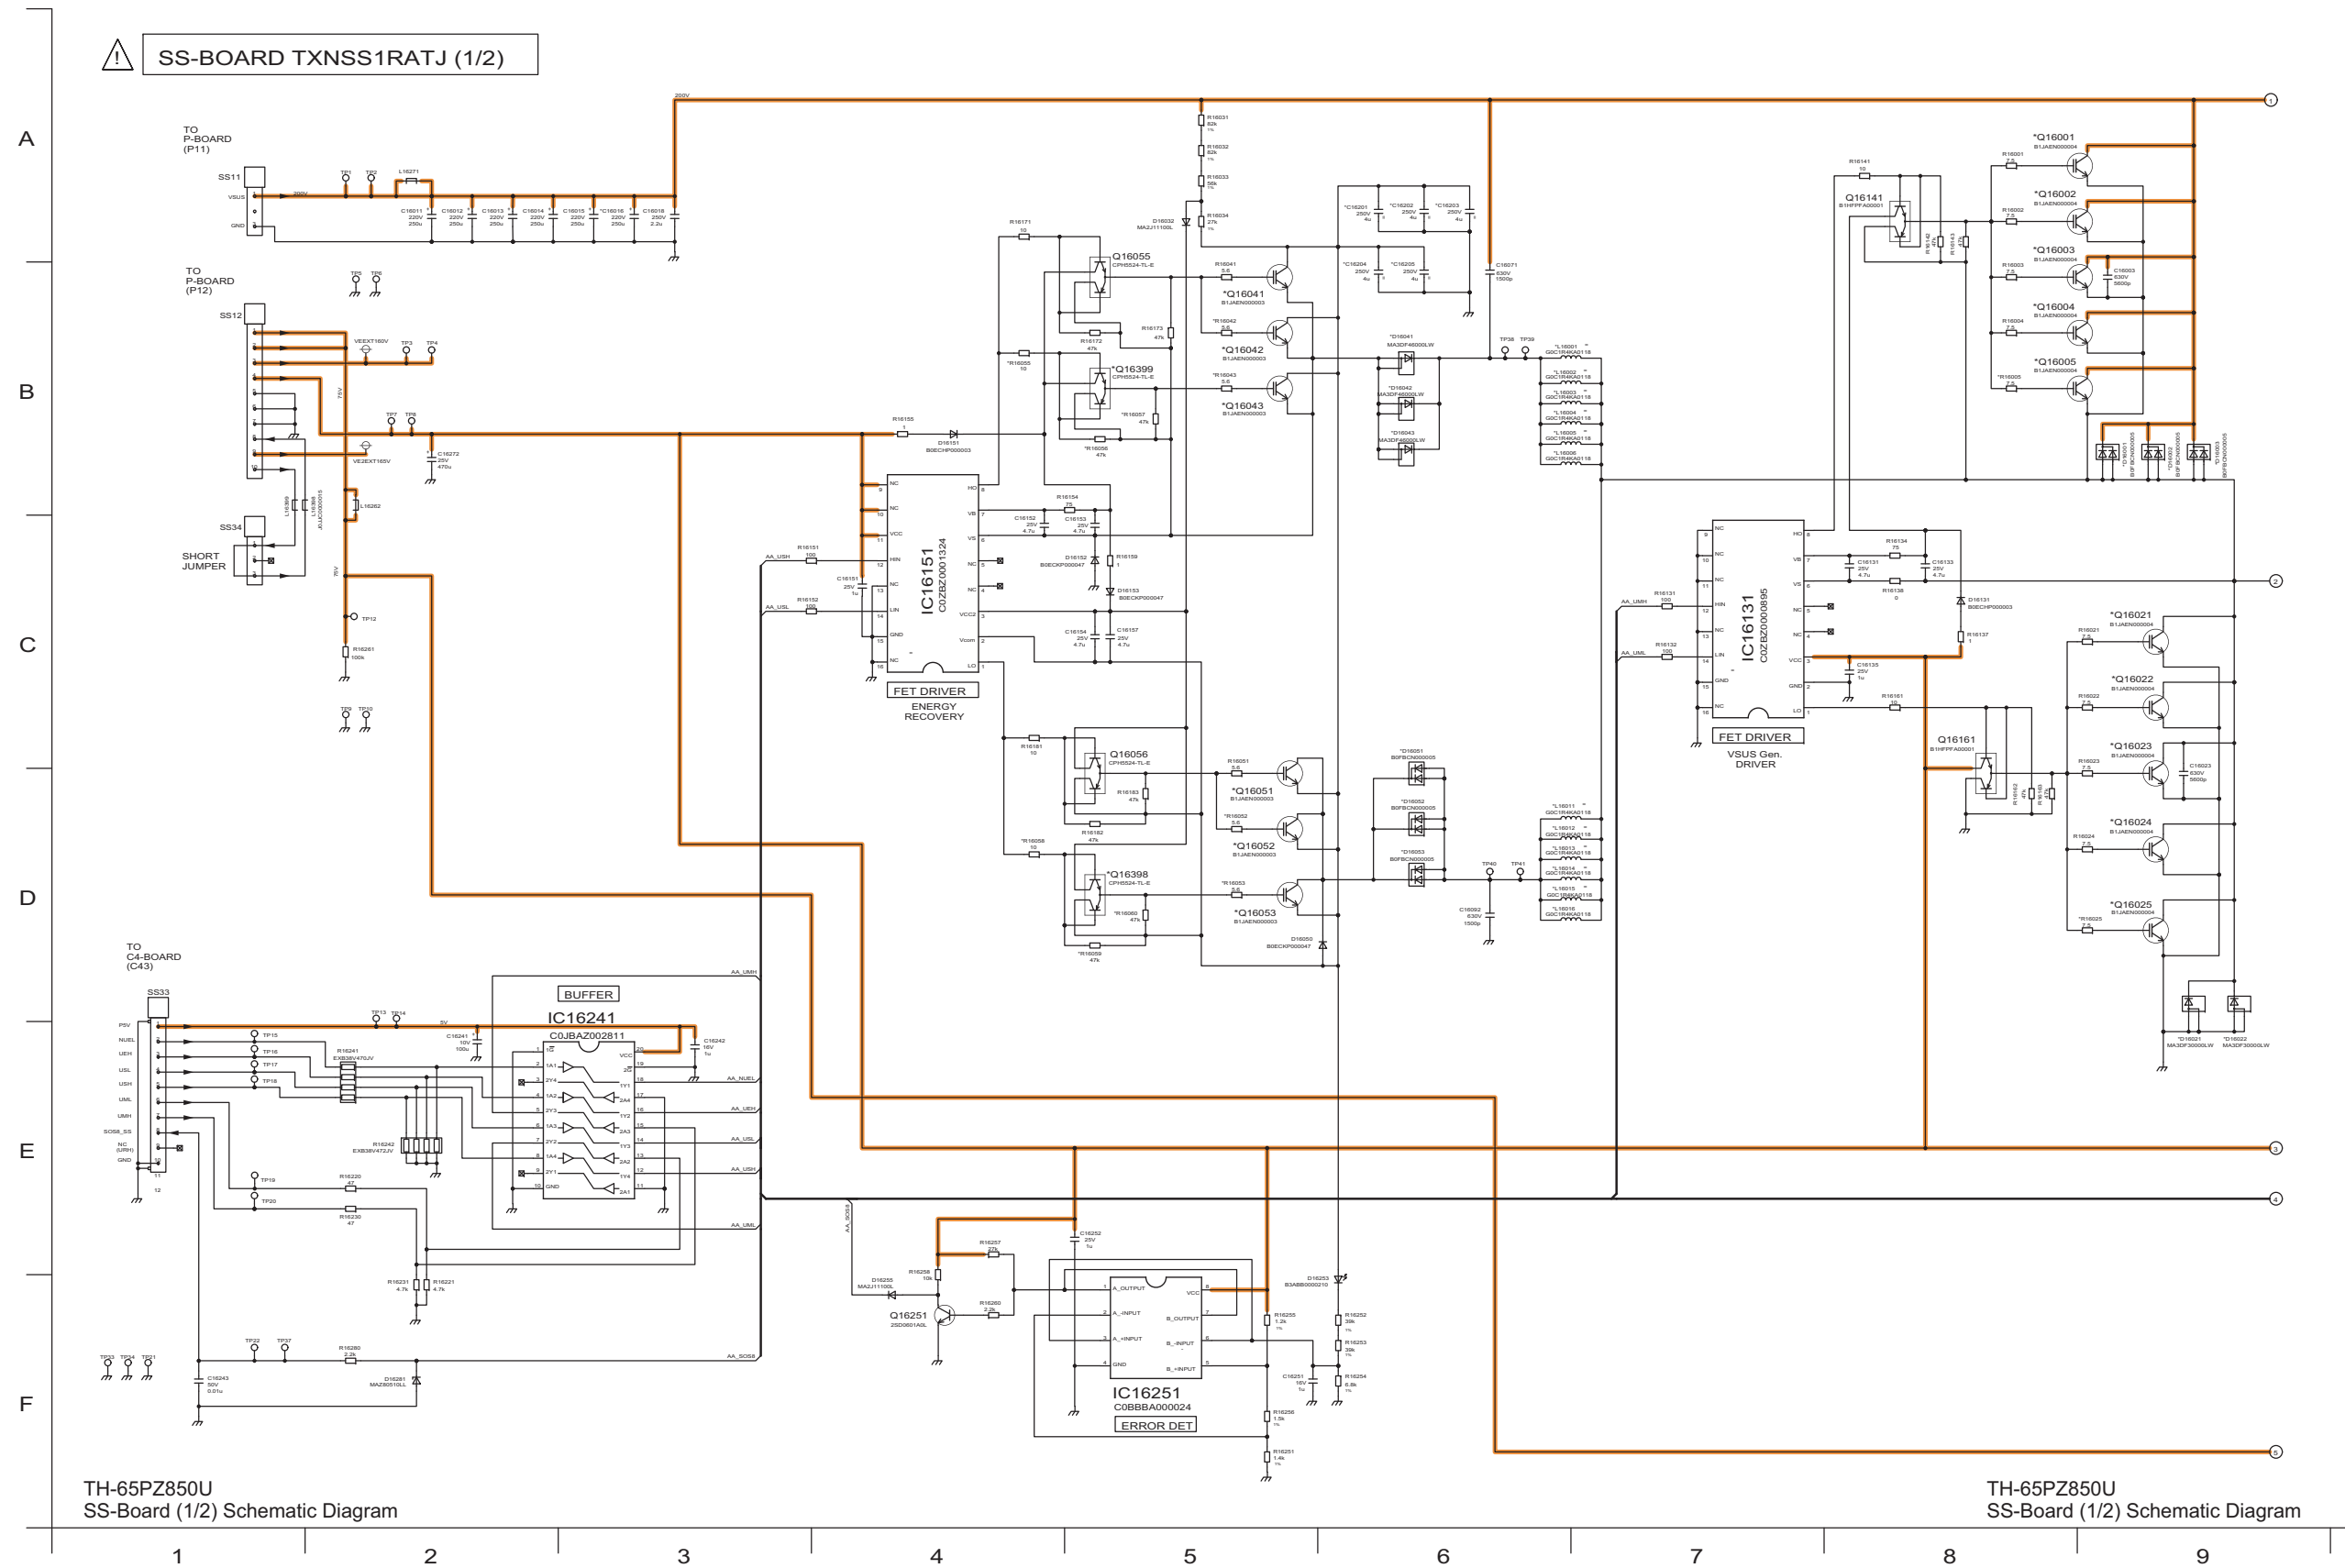

11.55. SS-Board (2/2), SS2-Board and SS3-Board Schematic Diagram

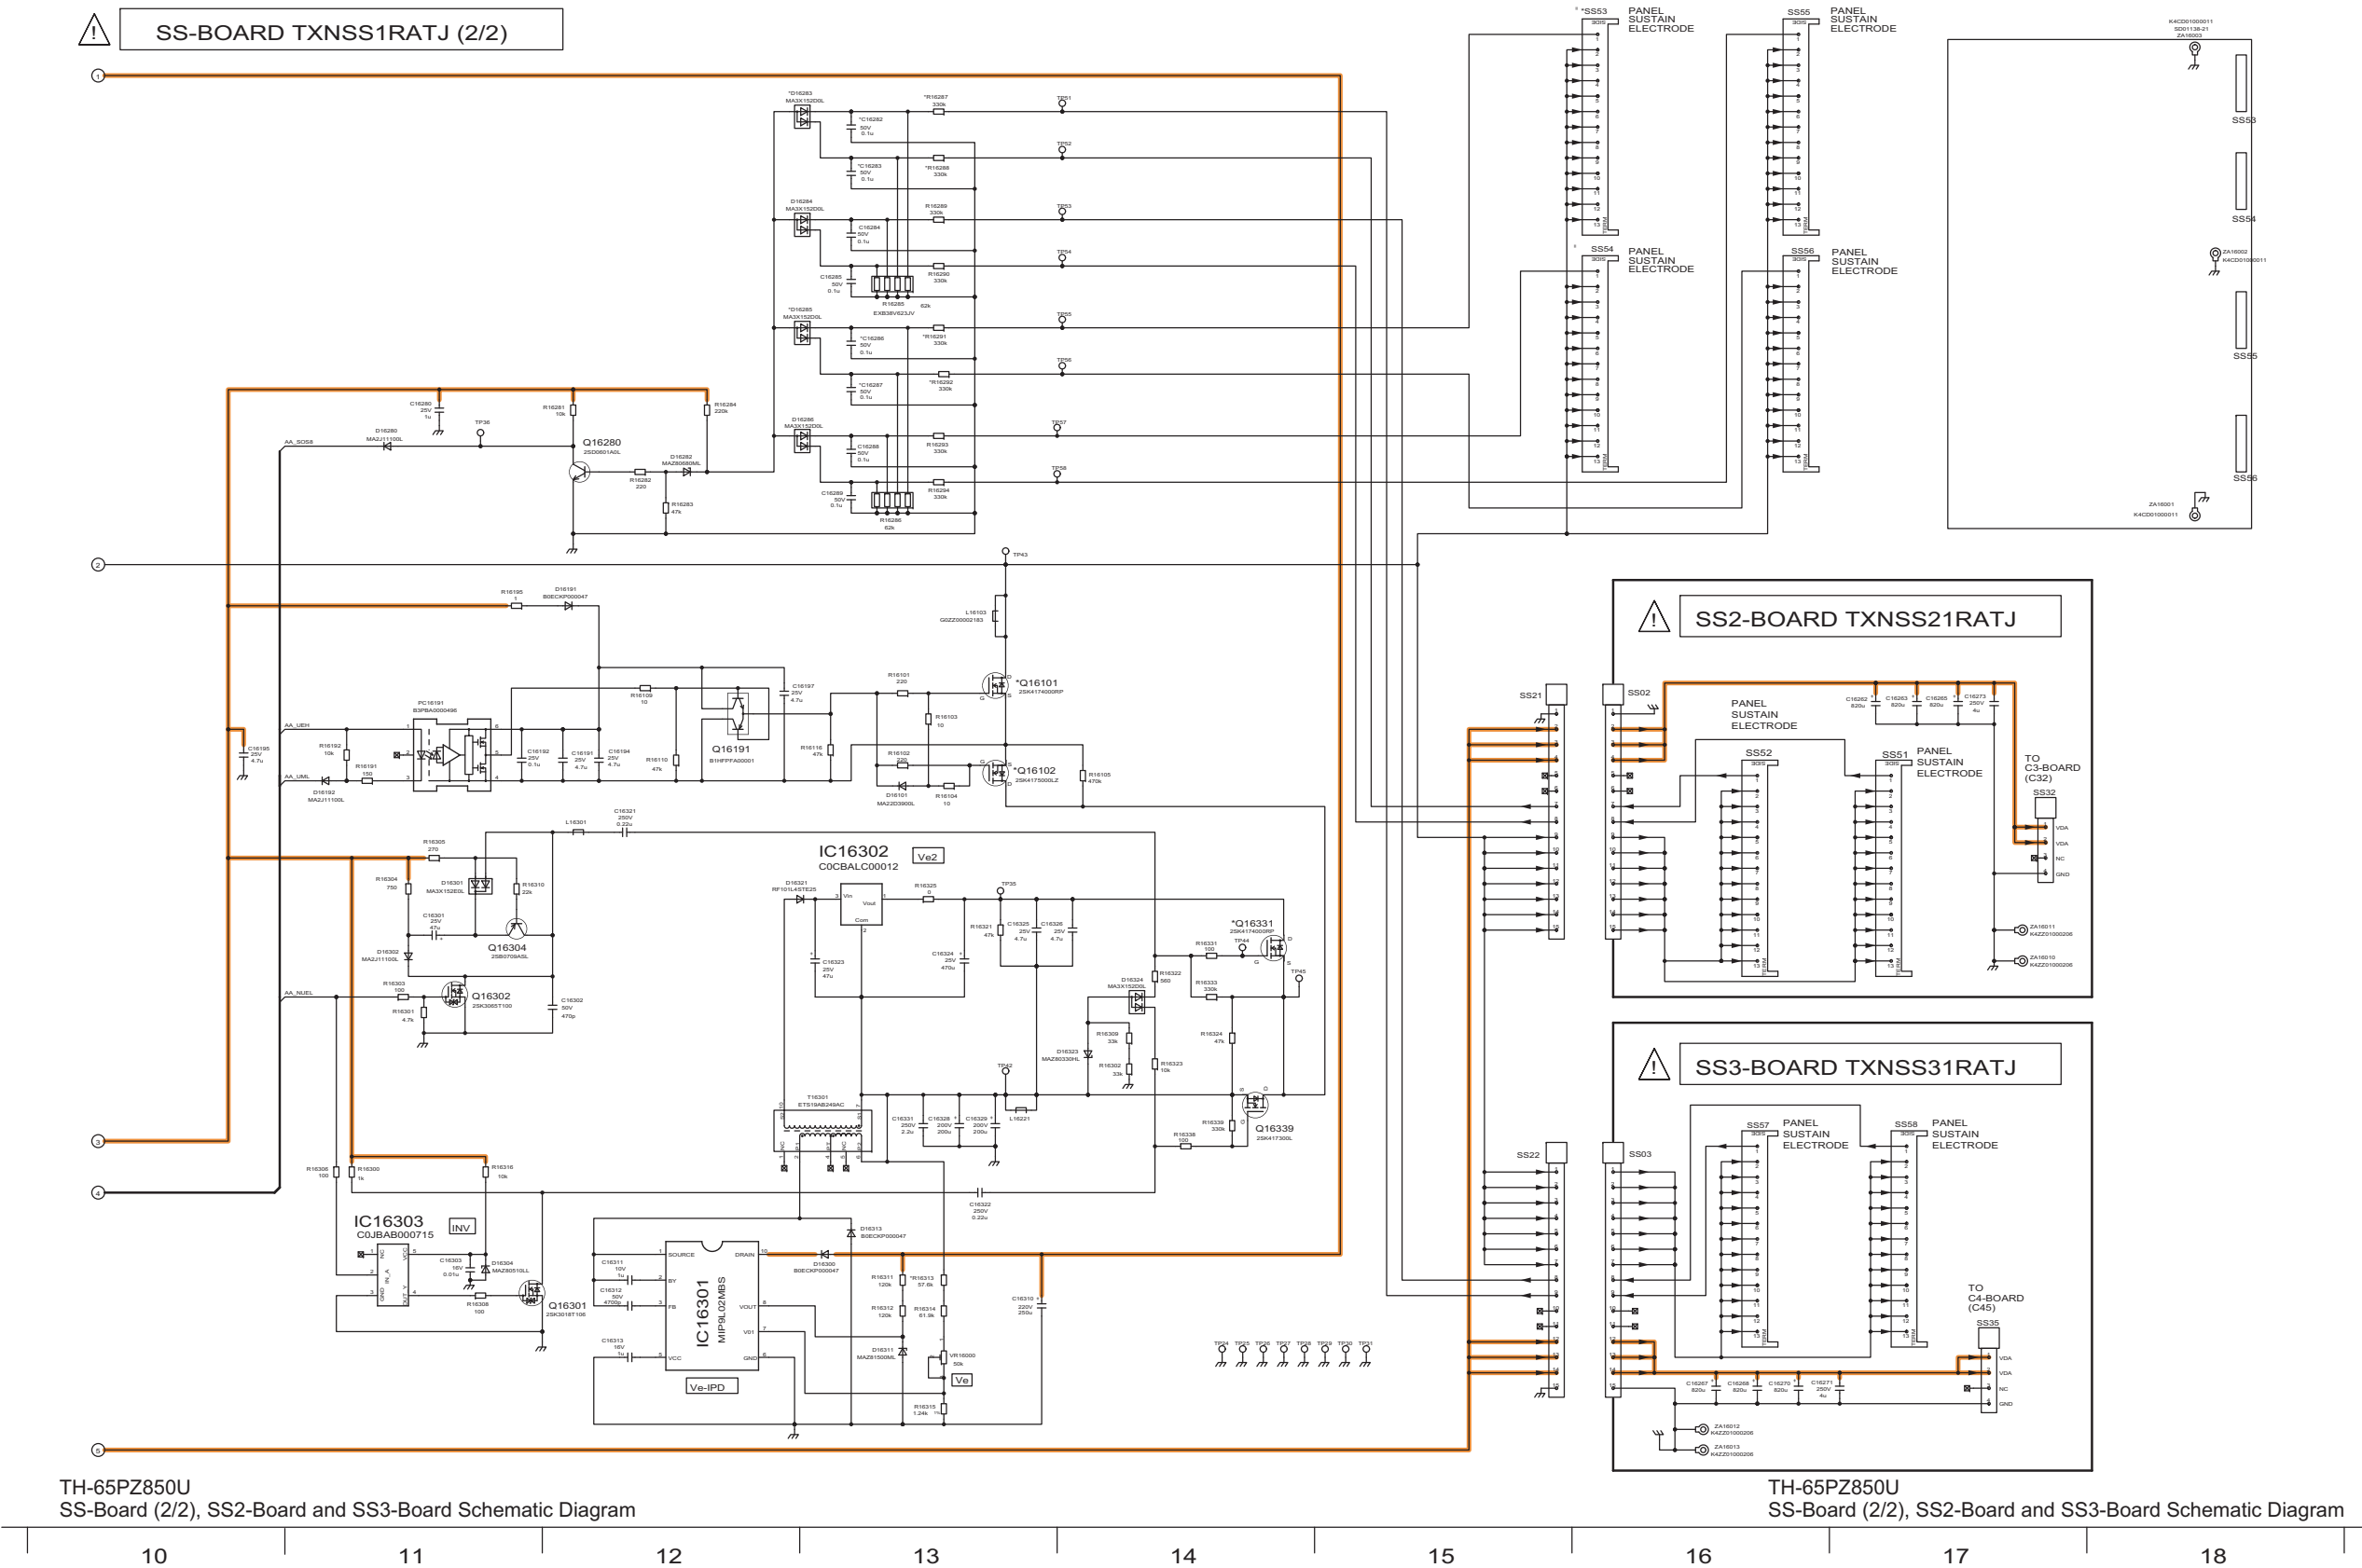

12.1. P(SUS)-Board




P(SUS)-BOARD (FOIL SIDE)			
IC		TRANSISTOR	
IC251	C-5	Q201	A-4
MODULE		Q202	A-4
		Q203	C-4
		Q204	C-4
		Q651	C-5
		Q652	C-5
MC201	C-3	TEST POINT	
MC203	A-5		
MC204	C-4		
MC231	D-3		
MC601	D-3		
MC602	B-2	TP1	A-4
MC603	C-3	TP2	A-4
MC606	A-3	TP5	B-6
		TP6	A-5
PHOTO COUPLER		VOLUME	
PC201	C-4	VR251	C-6
PC202	C-4		
PC231	C-4		


P(SUS)-BOARD (COMPONENT SIDE)			
IC		TRANSISTOR	
IC251	D-5	Q201 Q202 Q203 Q204 Q651 Q652	F-4 G-4 D-4 D-4 D-5 D-5
MODULE		TEST POINT	
MC201 MC203 MC204 MC231 MC601 MC602 MC603 MC606	E-3 F-5 D-4 D-3 D-3 F-2 E-3 F-3	TP1 TP2 TP5 TP6	G-4 F-4 E-6 G-5
PHOTO COUPLER		VOLUME	
PC201 PC202 PC231	D-4 D-4 D-4	VR251	D-6

TH-65PZ850U
P(SUS)-BOARD ETX2MM706NGN


12.2. P(MULTI)-Board

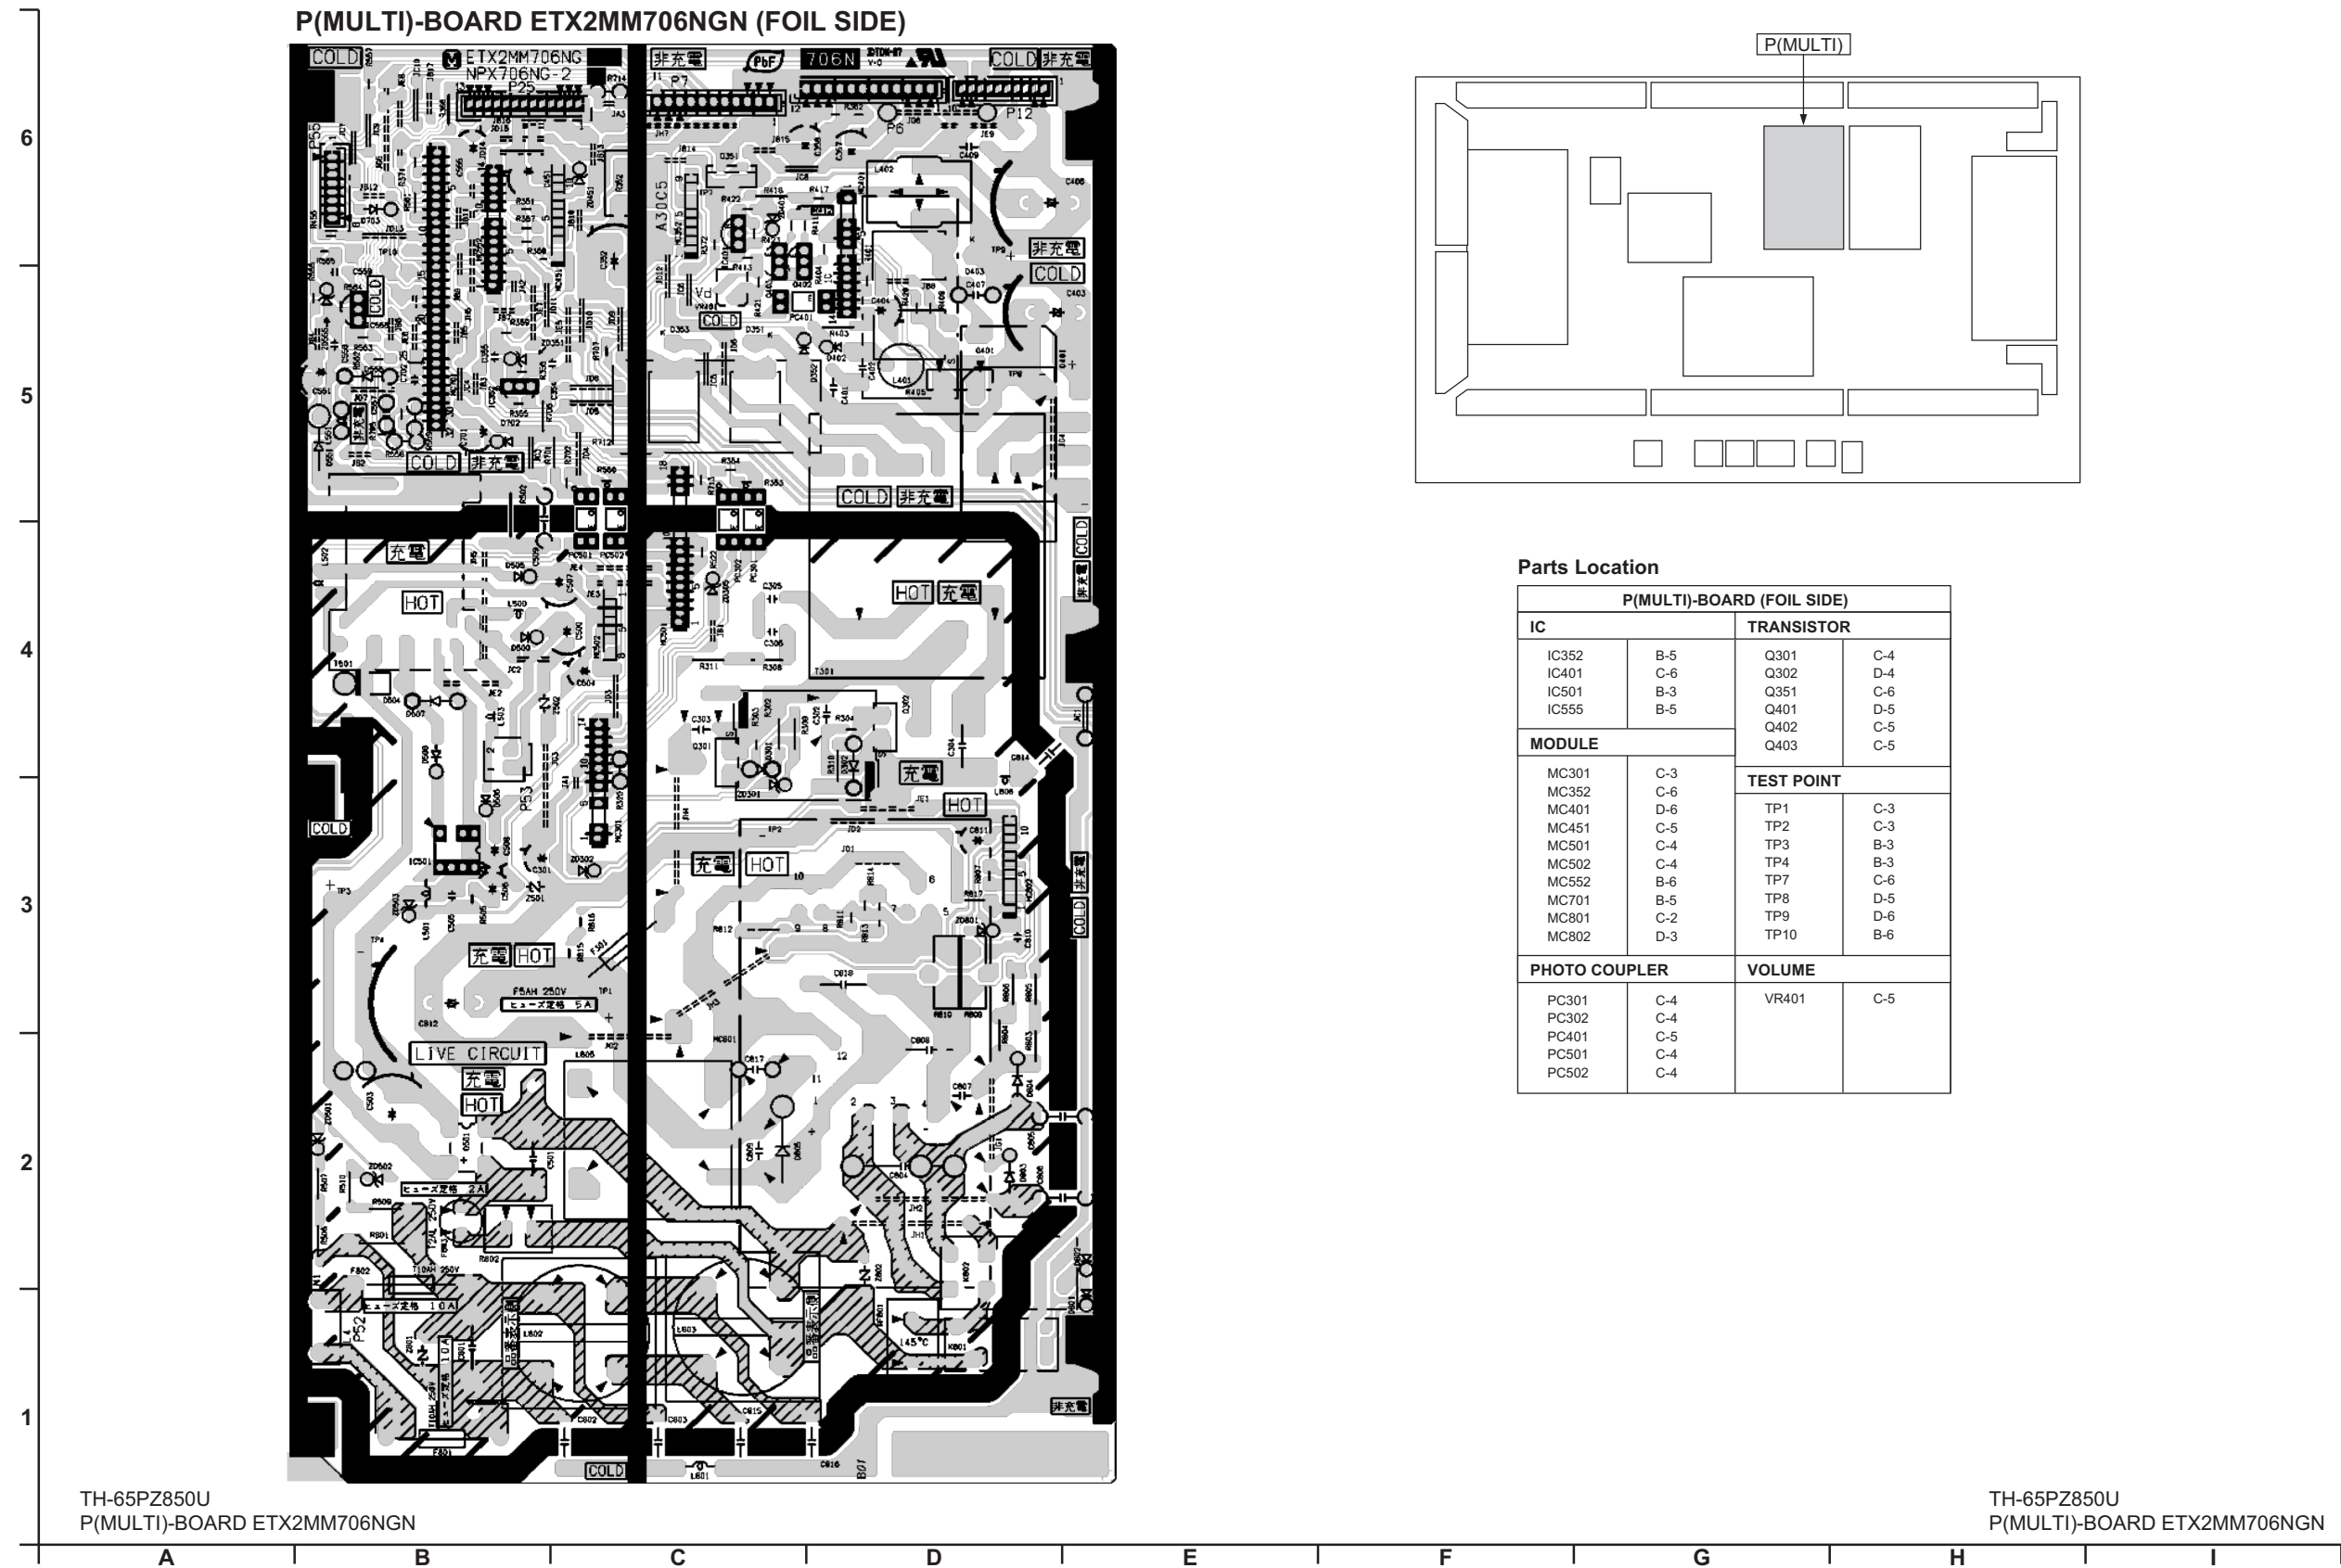


12.3. G, GH, GL and GS-Board

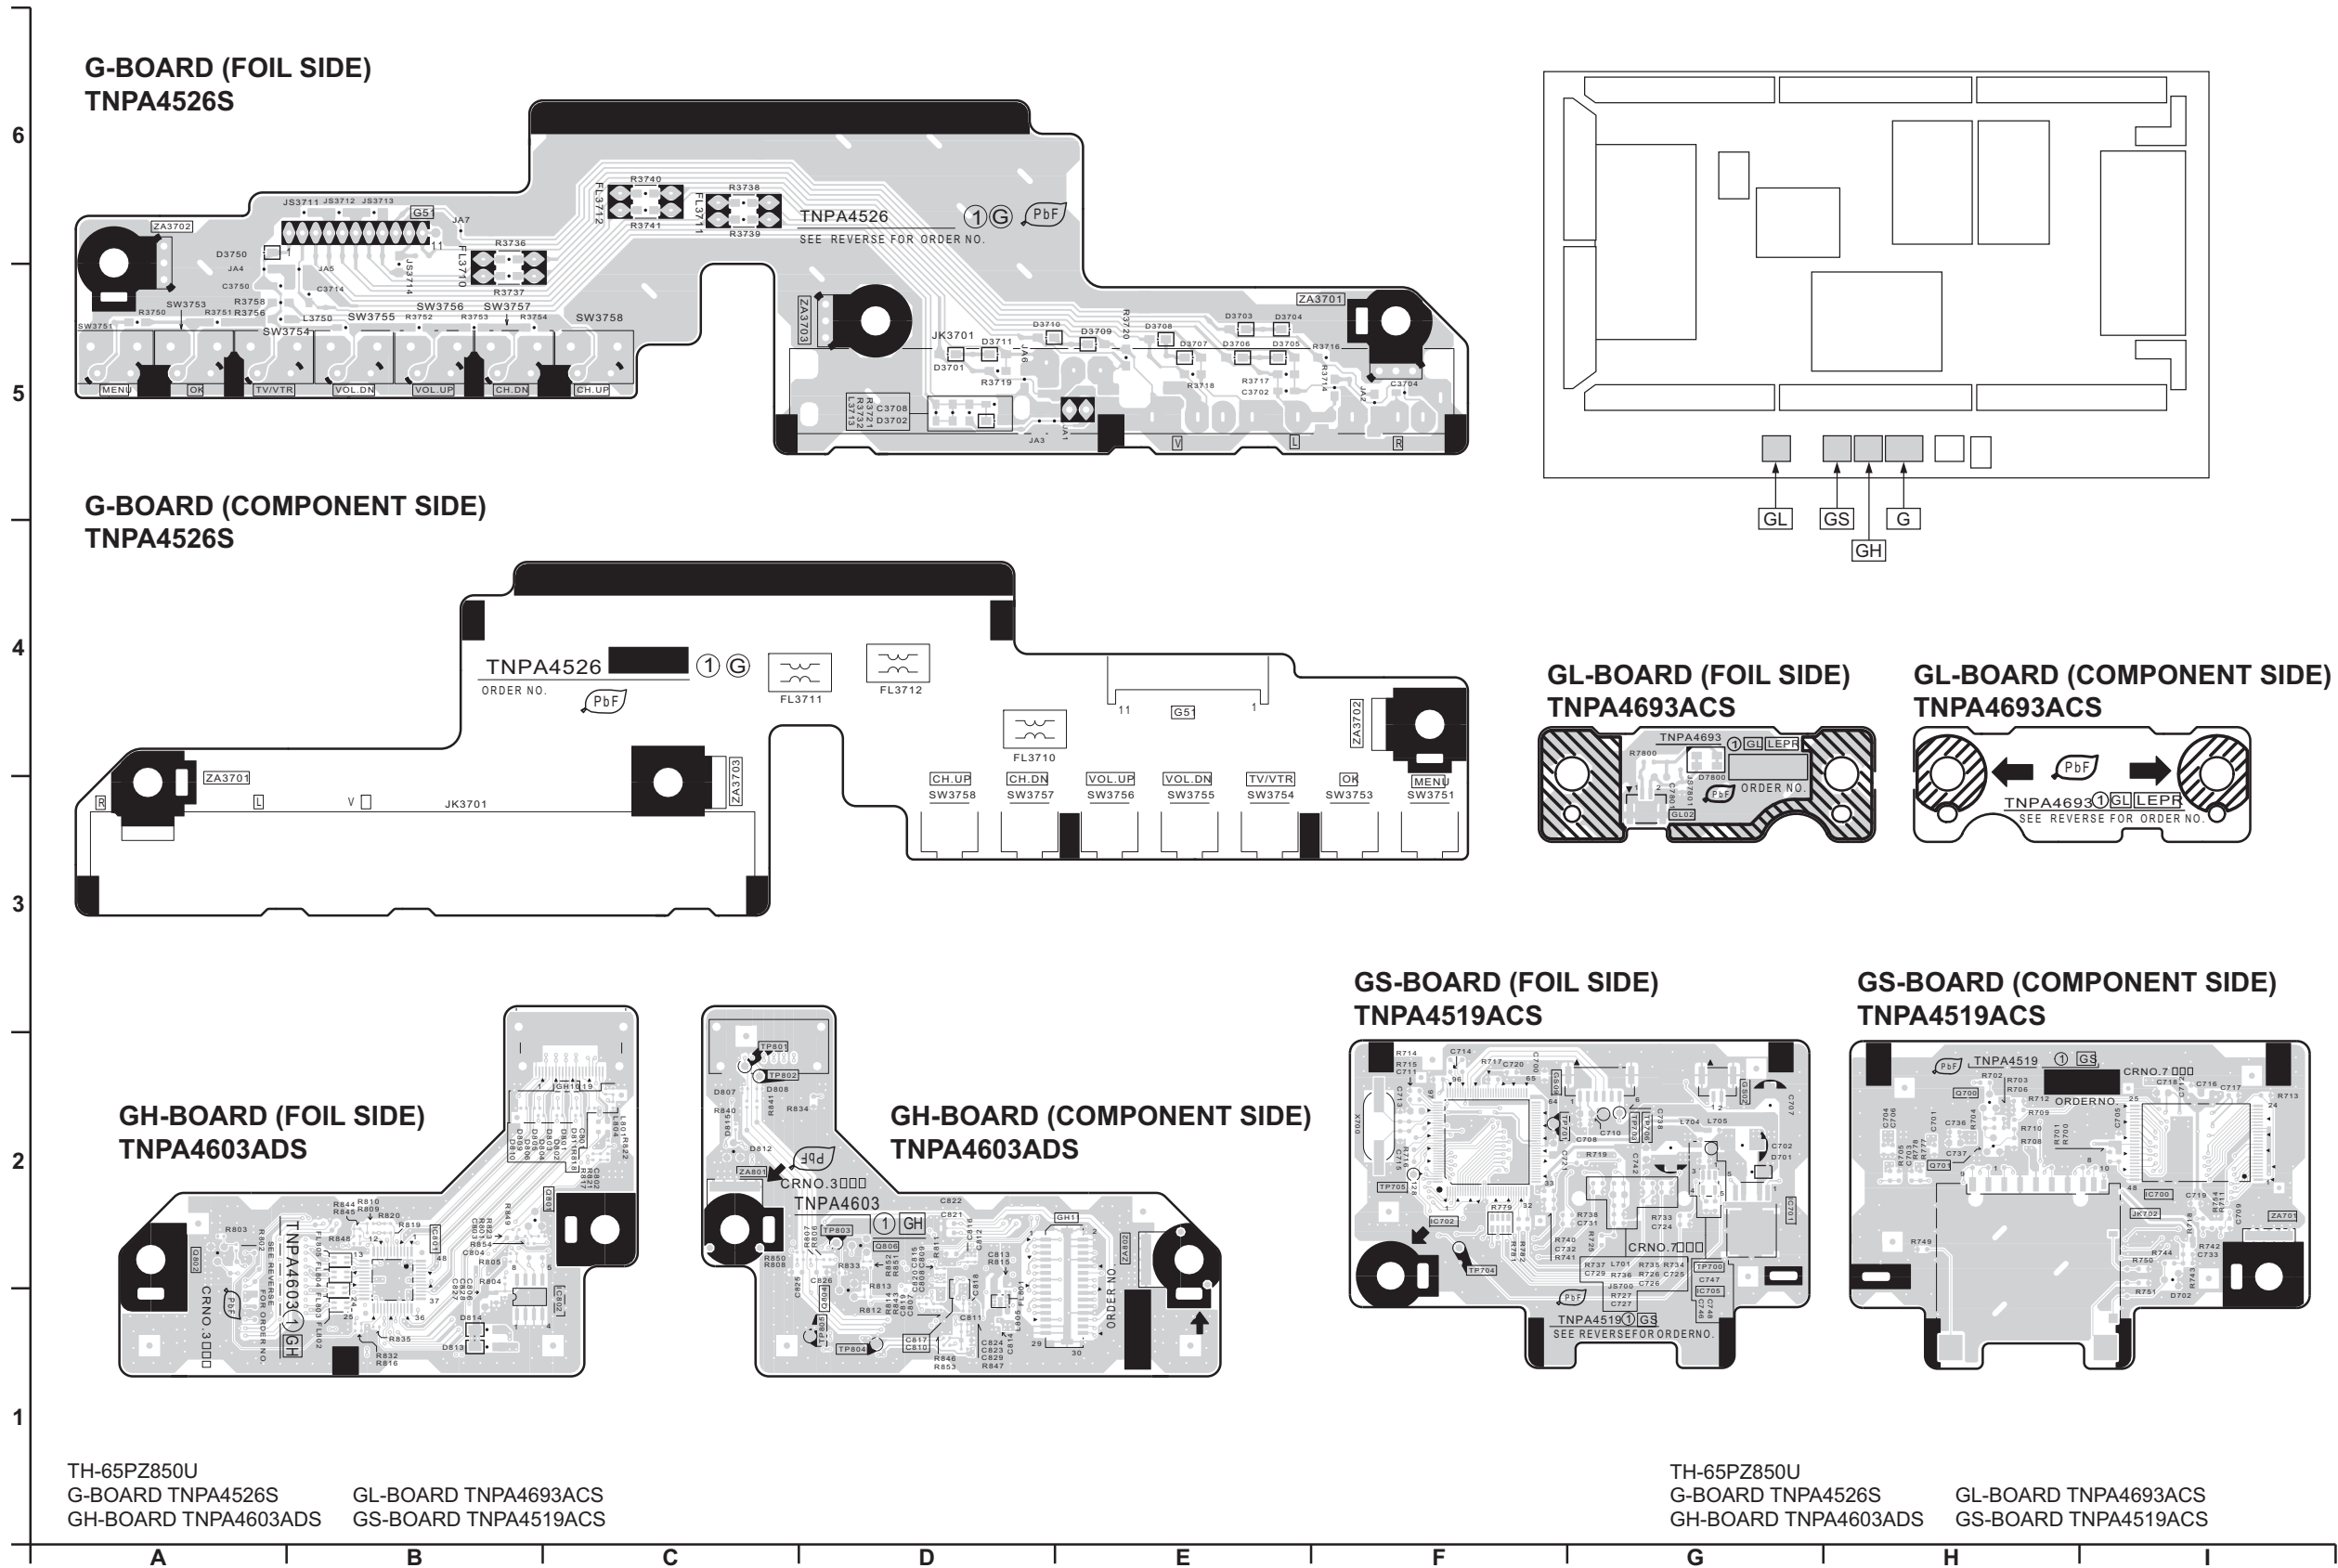


12.4. K, PB and S-Board

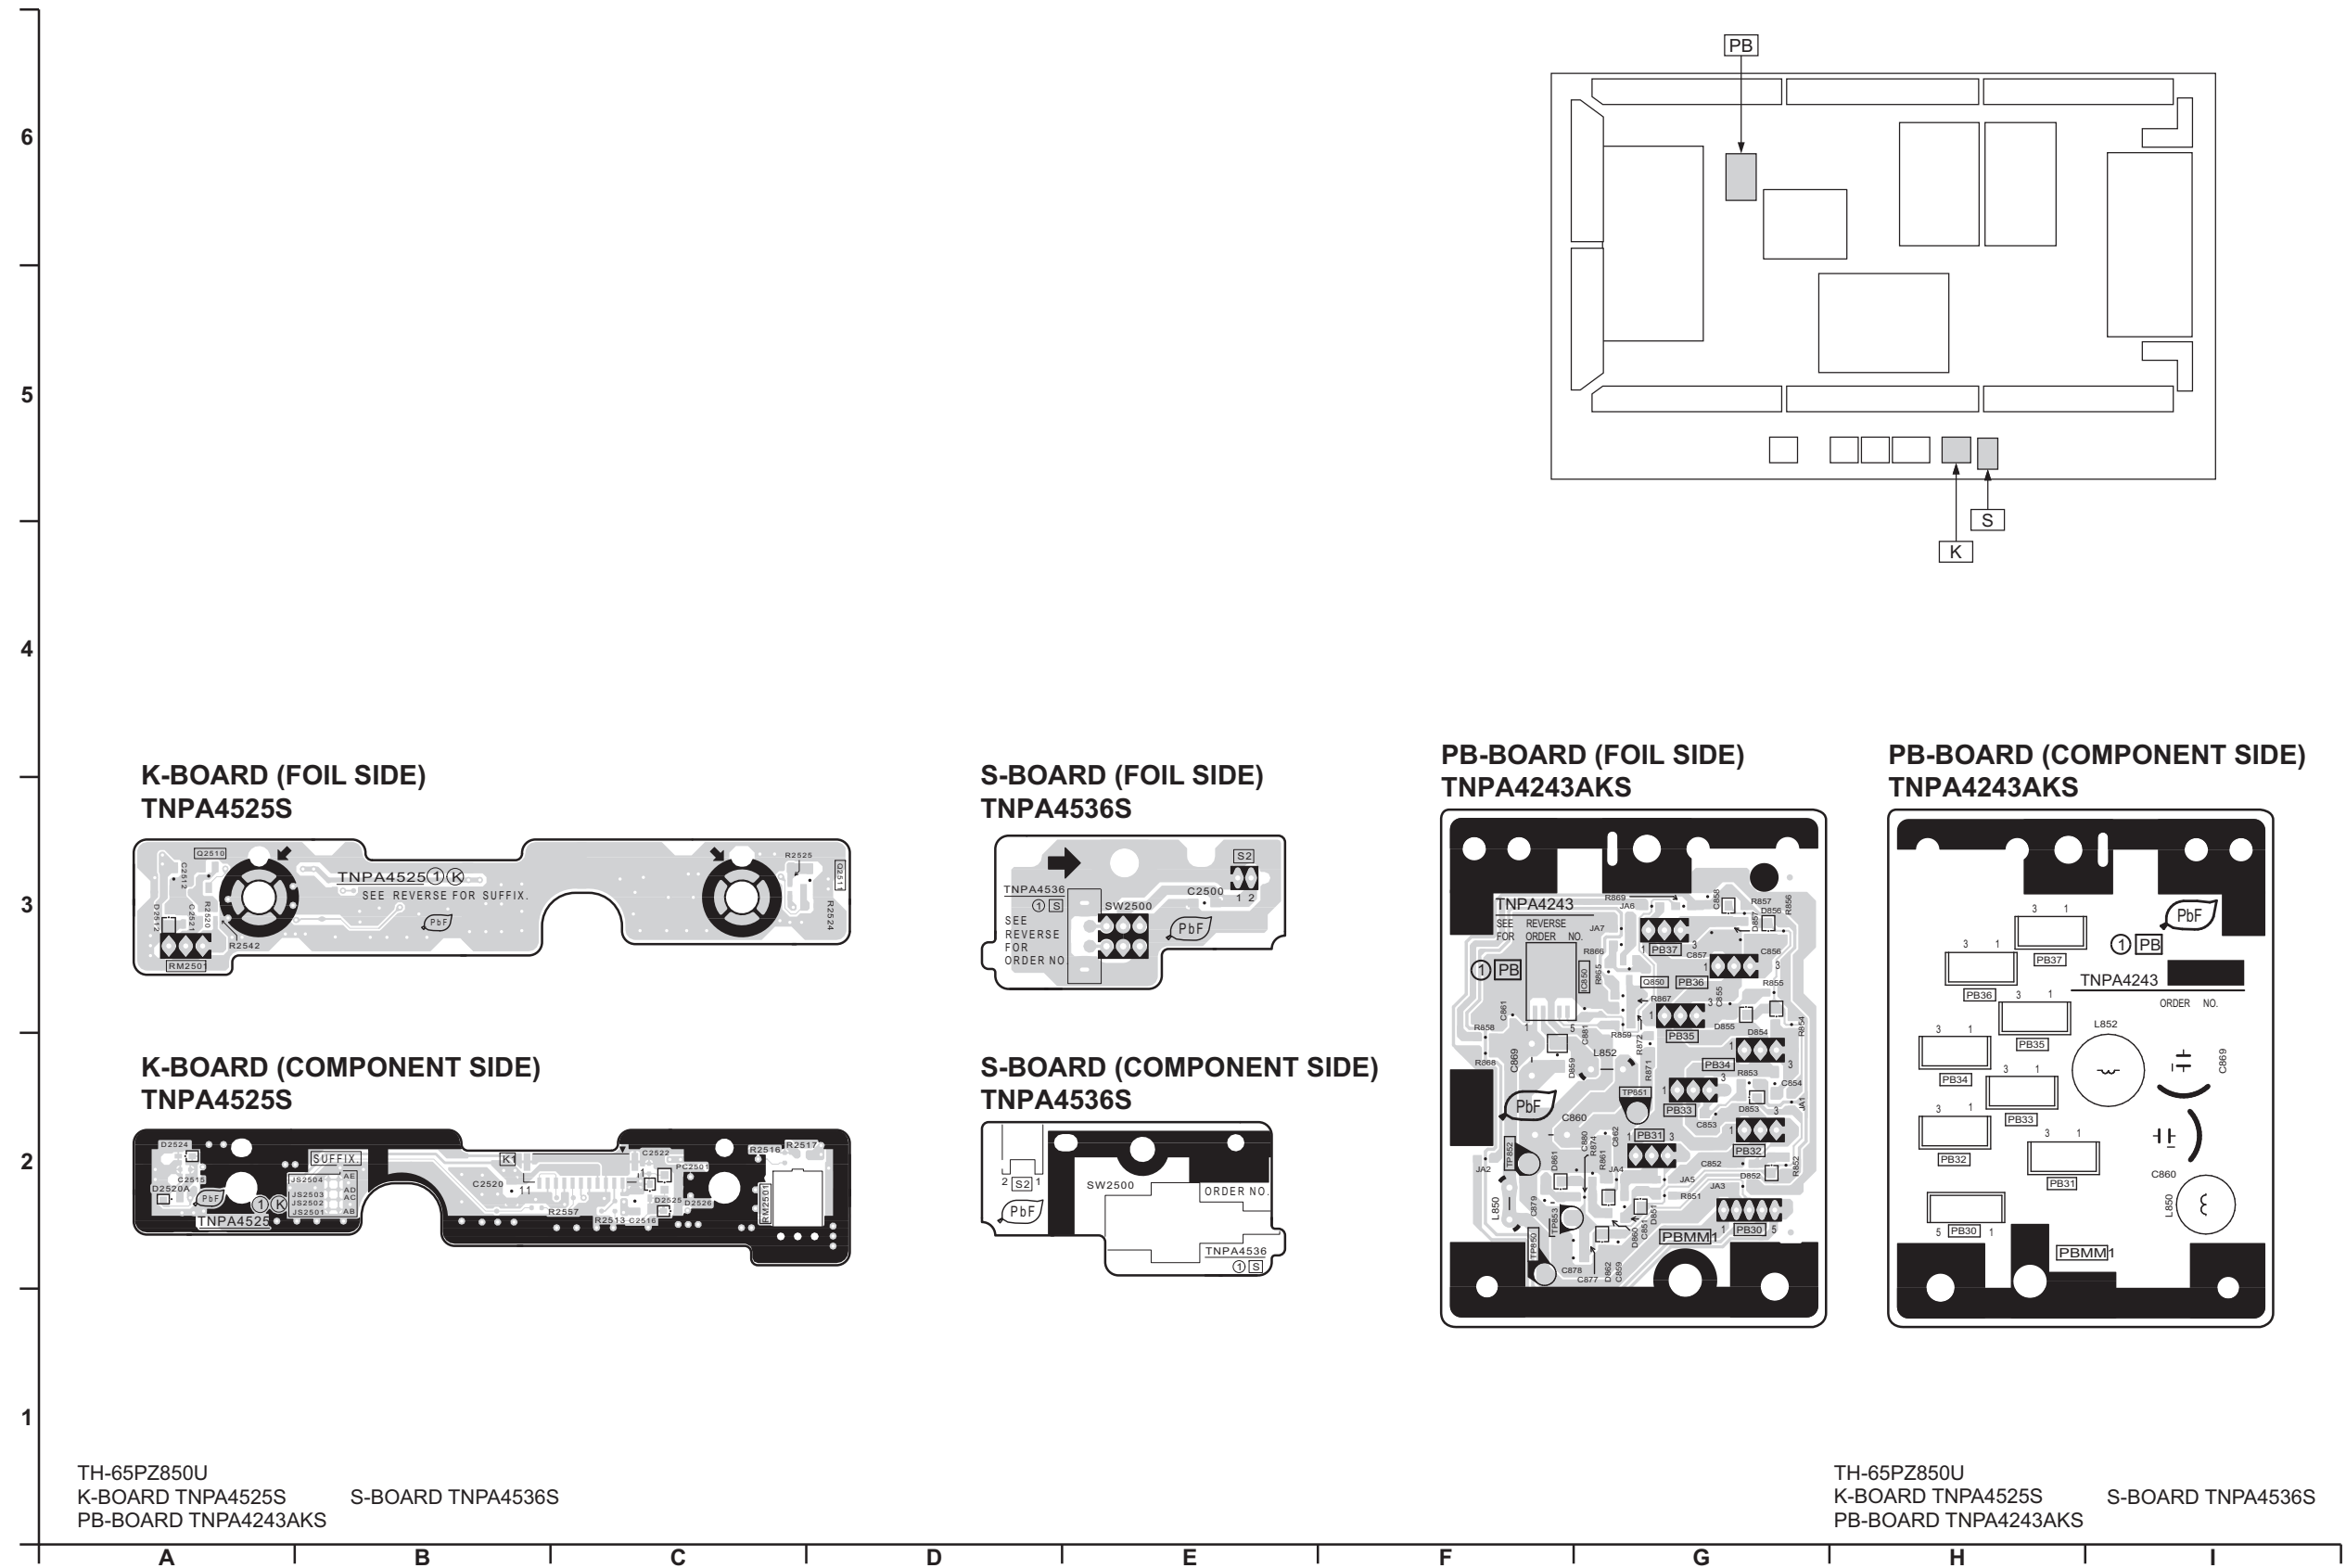

12.5. A-Board

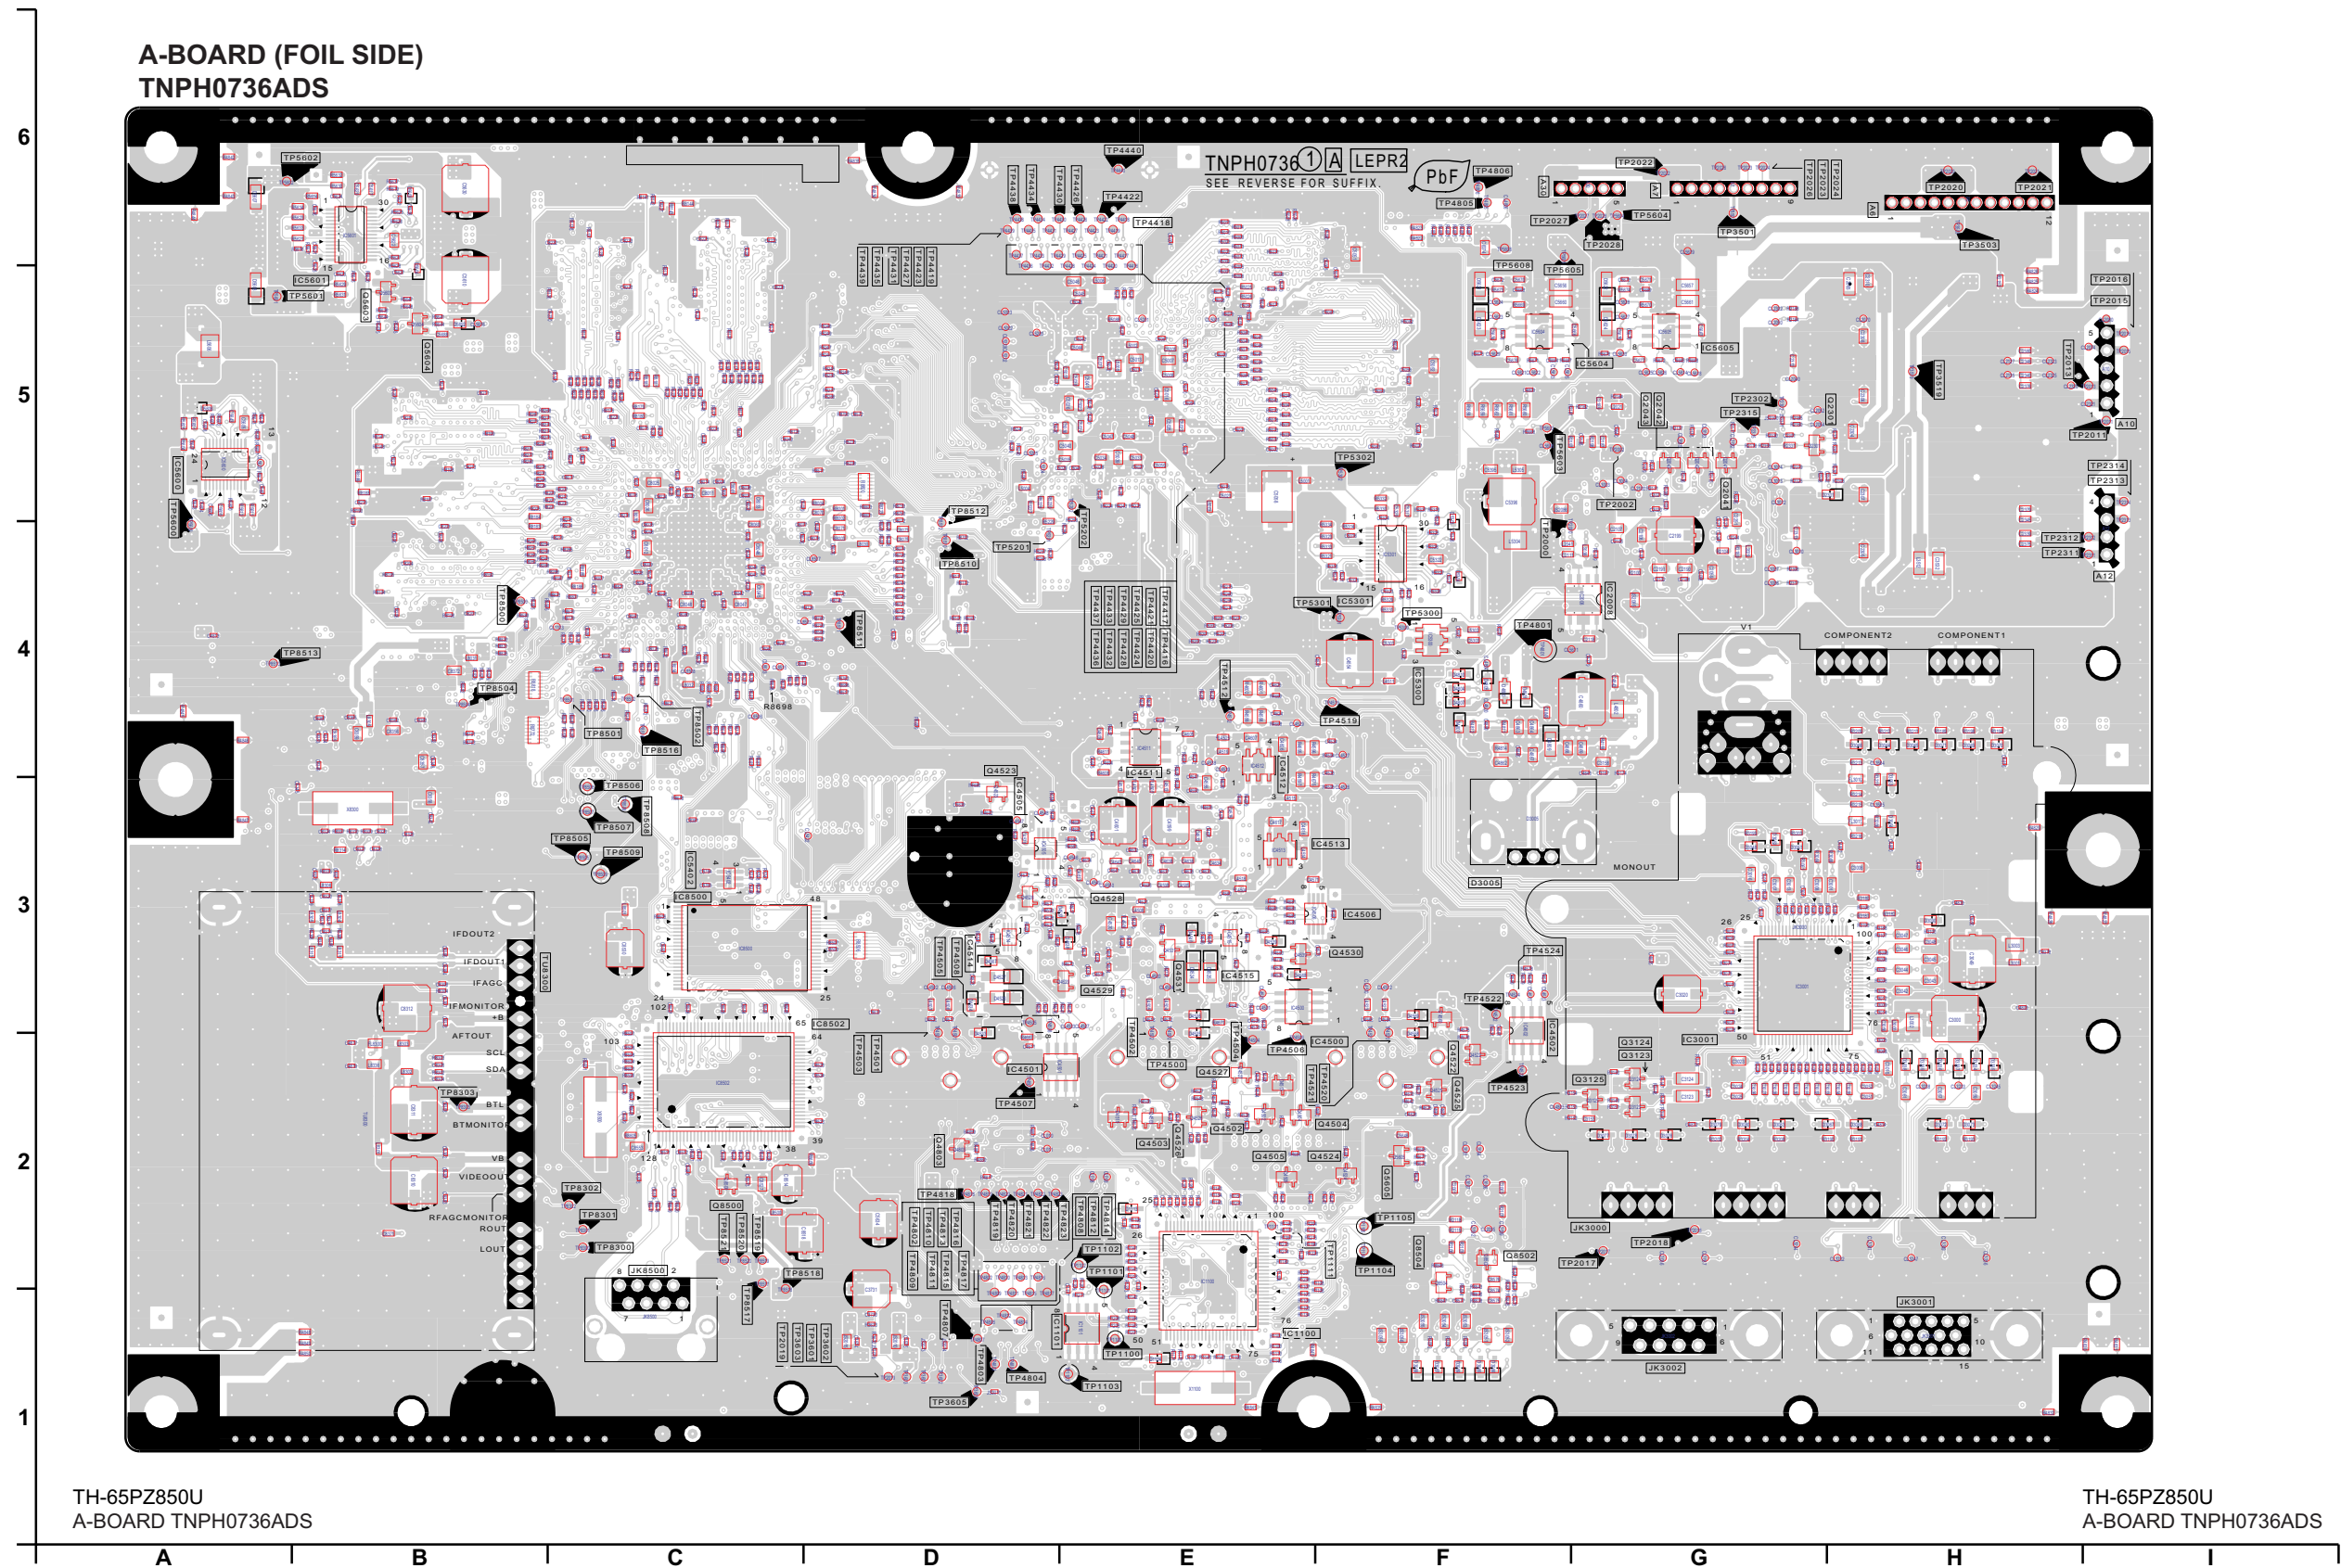

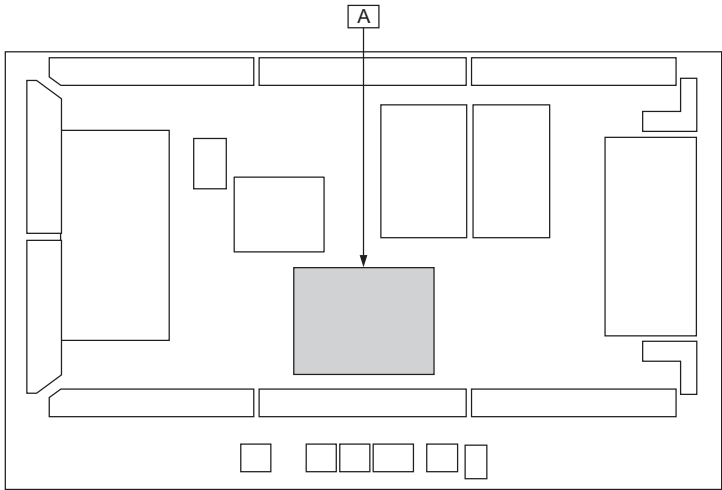

Parts Location

A-BOARD (FOIL SIDE)									
IC		TRANSISTOR		TEST POINT					
IC1100	E-1	Q2041	G-5	TP1100	E-1	TP4424	E-4	TP4814	E-2
IC1101	E-1	Q2042	G-5	TP1101	E-2	TP4425	E-4	TP4815	D-2
IC2008	G-4	Q2043	G-5	TP1102	E-2	TP4426	E-6	TP4816	D-2
IC3001	G-3	Q2301	H-5	TP1103	E-1	TP4427	D-6	TP4817	D-2
IC4500	F-2	Q3123	G-2	TP1104	F-2	TP4428	E-4	TP4818	D-2
IC4501	D-2	Q3124	G-2	TP1105	F-2	TP4429	E-4	TP4819	D-2
IC4502	F-3	Q3125	G-2	TP1111	F-2	TP4430	D-6	TP4820	D-2
IC4505	D-3	Q4502	E-2	TP2000	F-4	TP4431	D-6	TP4821	D-2
IC4506	F-3	Q4503	E-2	TP2002	G-5	TP4432	E-4	TP4822	D-2
IC4511	E-4	Q4504	F-2	TP2011	I-5	TP4433	E-4	TP4823	E-2
IC4512	E-4	Q4505	E-2	TP2013	H-5	TP4434	D-6	TP5201	D-4
IC4513	F-3	Q4522	F-2	TP2015	I-5	TP4435	D-6	TP5202	E-5
IC4514	D-3	Q4523	D-4	TP2016	I-5	TP4436	E-4	TP5300	F-4
IC4515	E-3	Q4524	F-2	TP2017	G-2	TP4437	E-4	TP5301	F-4
IC5300	F-4	Q4525	F-2	TP2018	G-2	TP4438	D-6	TP5302	F-5
IC5301	F-4	Q4526	E-2	TP2019	C-1	TP4439	D-6	TP5600	A-4
IC5402	C-3	Q4527	E-2	TP2020	H-6	TP4440	E-6	TP5601	B-5
IC5600	A-5	Q4528	E-3	TP2021	H-6	TP4500	E-2	TP5602	B-6
IC5601	B-6	Q4529	E-3	TP2022	G-6	TP4501	D-2	TP5603	F-5
IC5604	G-5	Q4530	F-3	TP2023	G-6	TP4502	E-2	TP5604	G-6
IC5605	G-5	Q4531	E-3	TP2024	H-6	TP4503	D-2	TP5605	F-5
IC8500	C-3	Q4803	D-2	TP2026	G-6	TP4504	E-2	TP5608	F-6
IC8502	C-2	Q5603	B-5	TP2027	F-6	TP4505	D-3	TP8300	C-2
		Q5604	B-5	TP2028	G-6	TP4506	E-2	TP8301	C-2
		Q5605	F-2	TP2302	G-5	TP4507	D-2	TP8302	C-2
		Q8500	C-2	TP2311	H-4	TP4508	D-3	TP8303	B-2
		Q8502	F-2	TP2312	H-4	TP4512	E-4	TP8500	B-4
		Q8504	F-2	TP2313	I-5	TP4519	F-4	TP8501	C-4
				TP2314	I-5	TP4520	F-2	TP8502	C-4
				TP2315	G-5	TP4521	E-2	TP8504	B-4
				TP3501	G-6	TP4522	F-3	TP8505	C-3
				TP3503	H-6	TP4523	F-2	TP8506	C-3
				TP3519	H-5	TP4524	F-3	TP8507	C-3
				TP3601	D-1	TP4801	F-4	TP8508	C-3
				TP3602	D-1	TP4802	D-2	TP8509	C-3
				TP3603	C-1	TP4803	D-1	TP8510	D-4
				TP3605	D-1	TP4804	D-1	TP8511	D-4
				TP4416	E-4	TP4805	F-6	TP8512	D-5
				TP4417	E-4	TP4806	F-6	TP8513	B-4
				TP4418	E-5	TP4807	D-1	TP8516	C-4
				TP4419	D-6	TP4808	E-2	TP8517	C-2
				TP4420	E-4	TP4809	D-2	TP8518	C-2
				TP4421	E-4	TP4810	D-2	TP8519	C-2
				TP4422	E-6	TP4811	D-2	TP8520	C-2
				TP4423	D-6	TP4812	E-2	TP8521	C-2
						TP4813	D-2		

TH-65PZ850U
A-BOARD PARTS LOCATION


Parts Location

A-BOARD (COMPONENT SIDE)					
IC		TRANSISTOR		TEST POINT	
IC2009	C-2	Q4514	D-4	TP1110	D-2
IC2106	C-5	Q4515	D-3	TP2025	C-6
IC2107	C-5	Q4516	D-4	TP3500	C-6
IC2301	B-4	Q4517	D-4	TP3502	B-6
IC2302	B-5	Q4800	D-2	TP3518	B-6
IC4503	E-3	Q4801	E-2	TP4800	C-4
IC4510	E-3	Q4802	C-4	TP5606	D-6
IC4800	C-4	Q5301	D-4	TP5607	C-6
IC4801	F-2	Q5302	D-4	TP8522	F-4
IC4802	E-2	Q5600	H-5	TP8523	F-5
IC5001	D-5	Q5601	H-6		
IC5002	D-6	Q5602	H-5		
IC5100	E-5	Q5606	C-5		
IC5603	D-2	Q8300	G-2		
IC8001	G-5	Q8501	C-1		
IC8201	H-4	Q8503	C-2		
IC8202	H-5				
IC8203	G-5				
IC8204	G-5				
IC8300	H-3				
IC8501	F-3				
IC8503	G-3				
IC8504	G-2				
IC8505	G-2				
IC8506	G-3				

TH-65PZ850U
A-BOARD PARTS LOCATION

TH-65PZ850U
A-BOARD TNPH0736ADS

12.6. D-Board

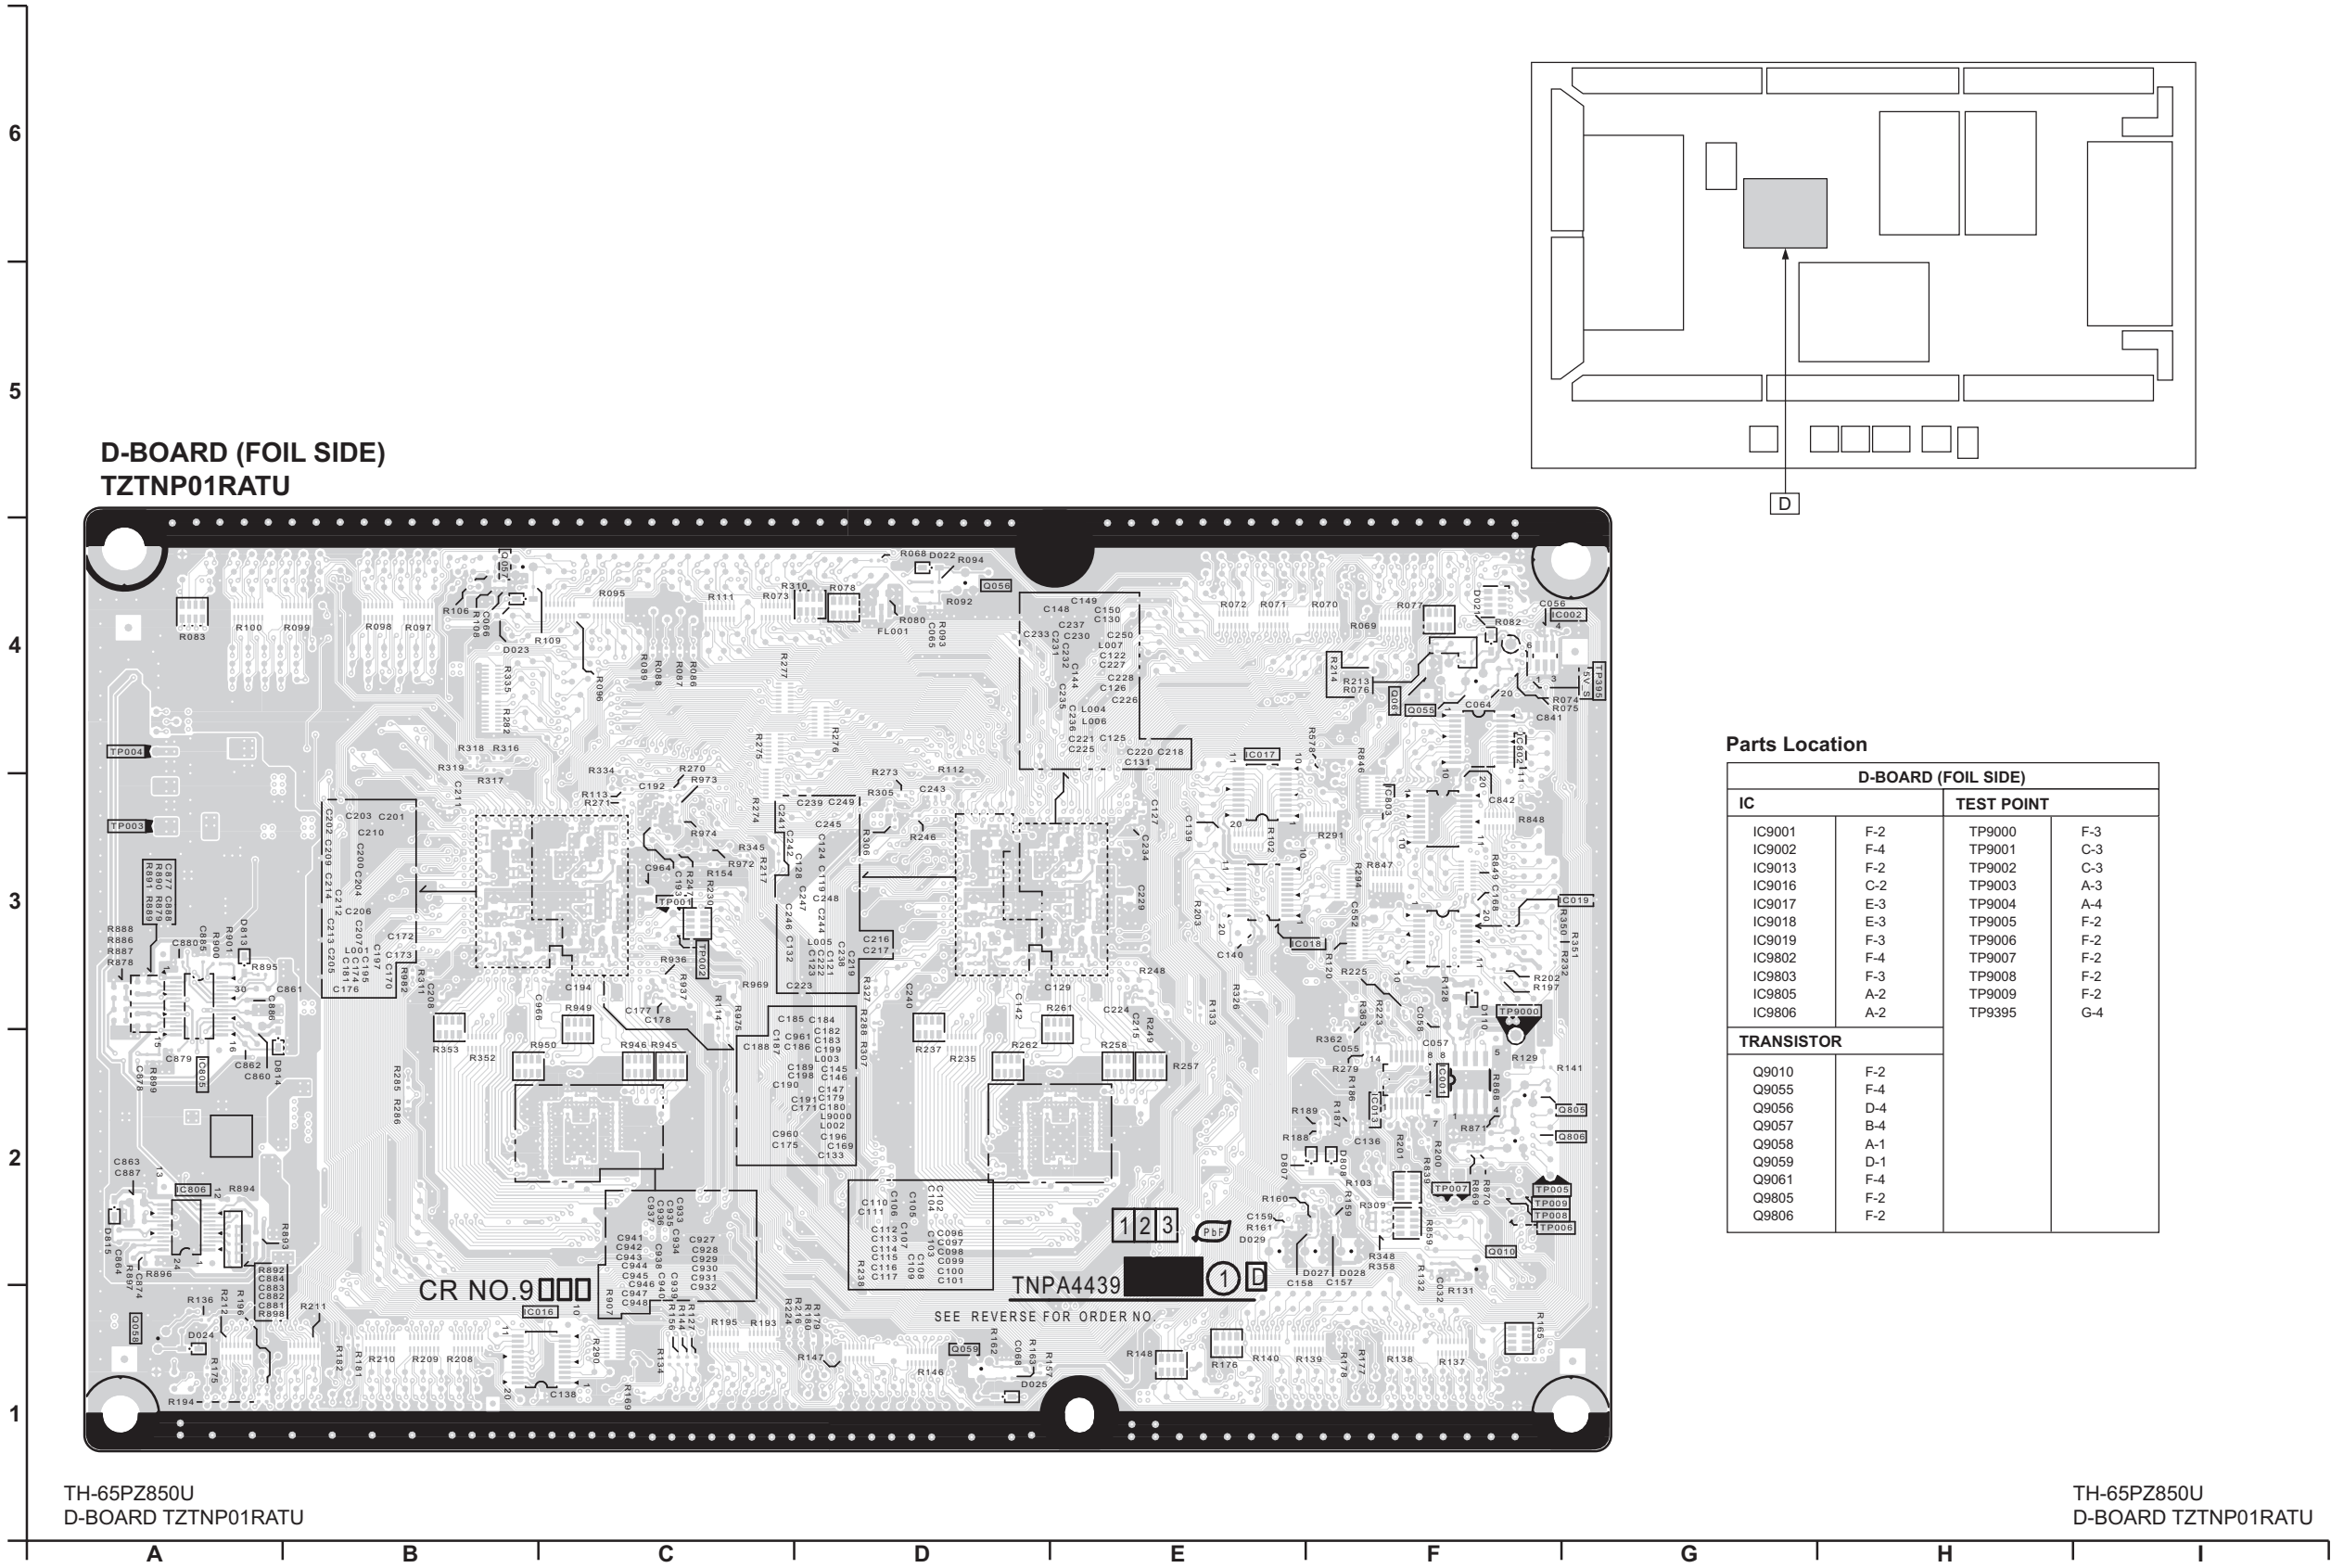

TH-65PZ850U
D-BOARD TZTNP01RATU

TH-65PZ850U
D-BOARD TZTNP01RATU

A

B

C

D

E


F

G


H

I


12.7. C1-Board

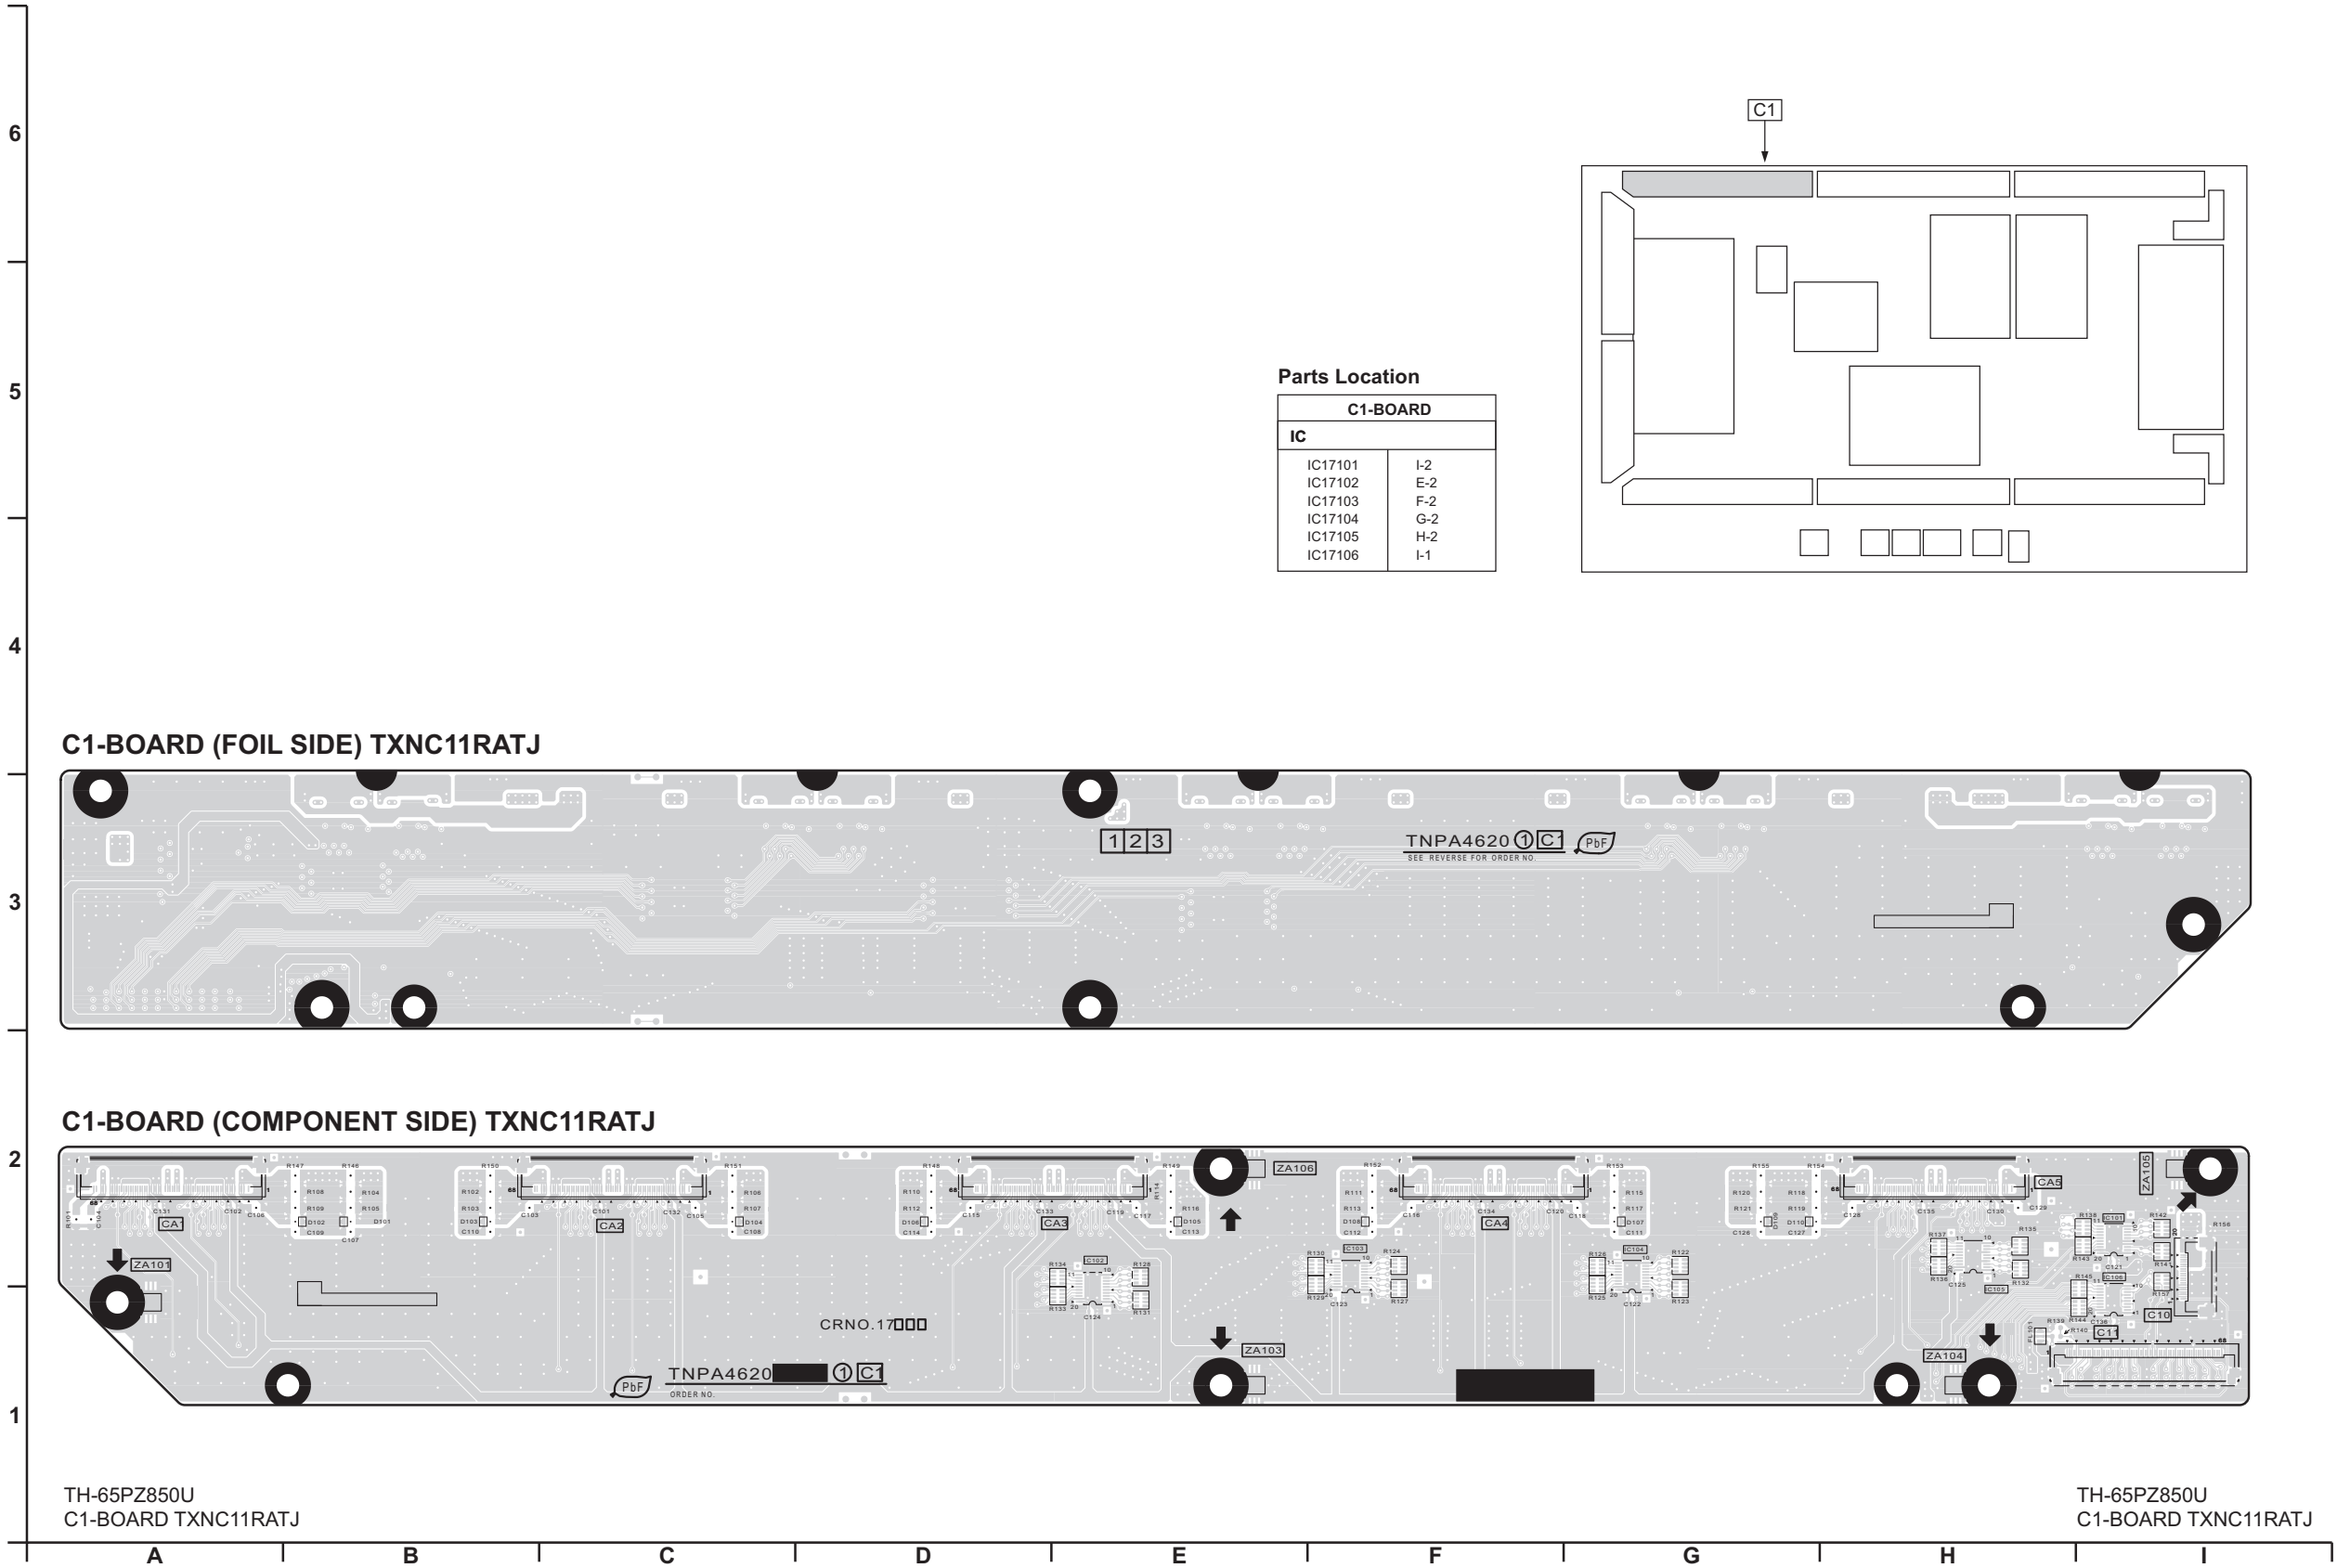


12.8. C2-Board

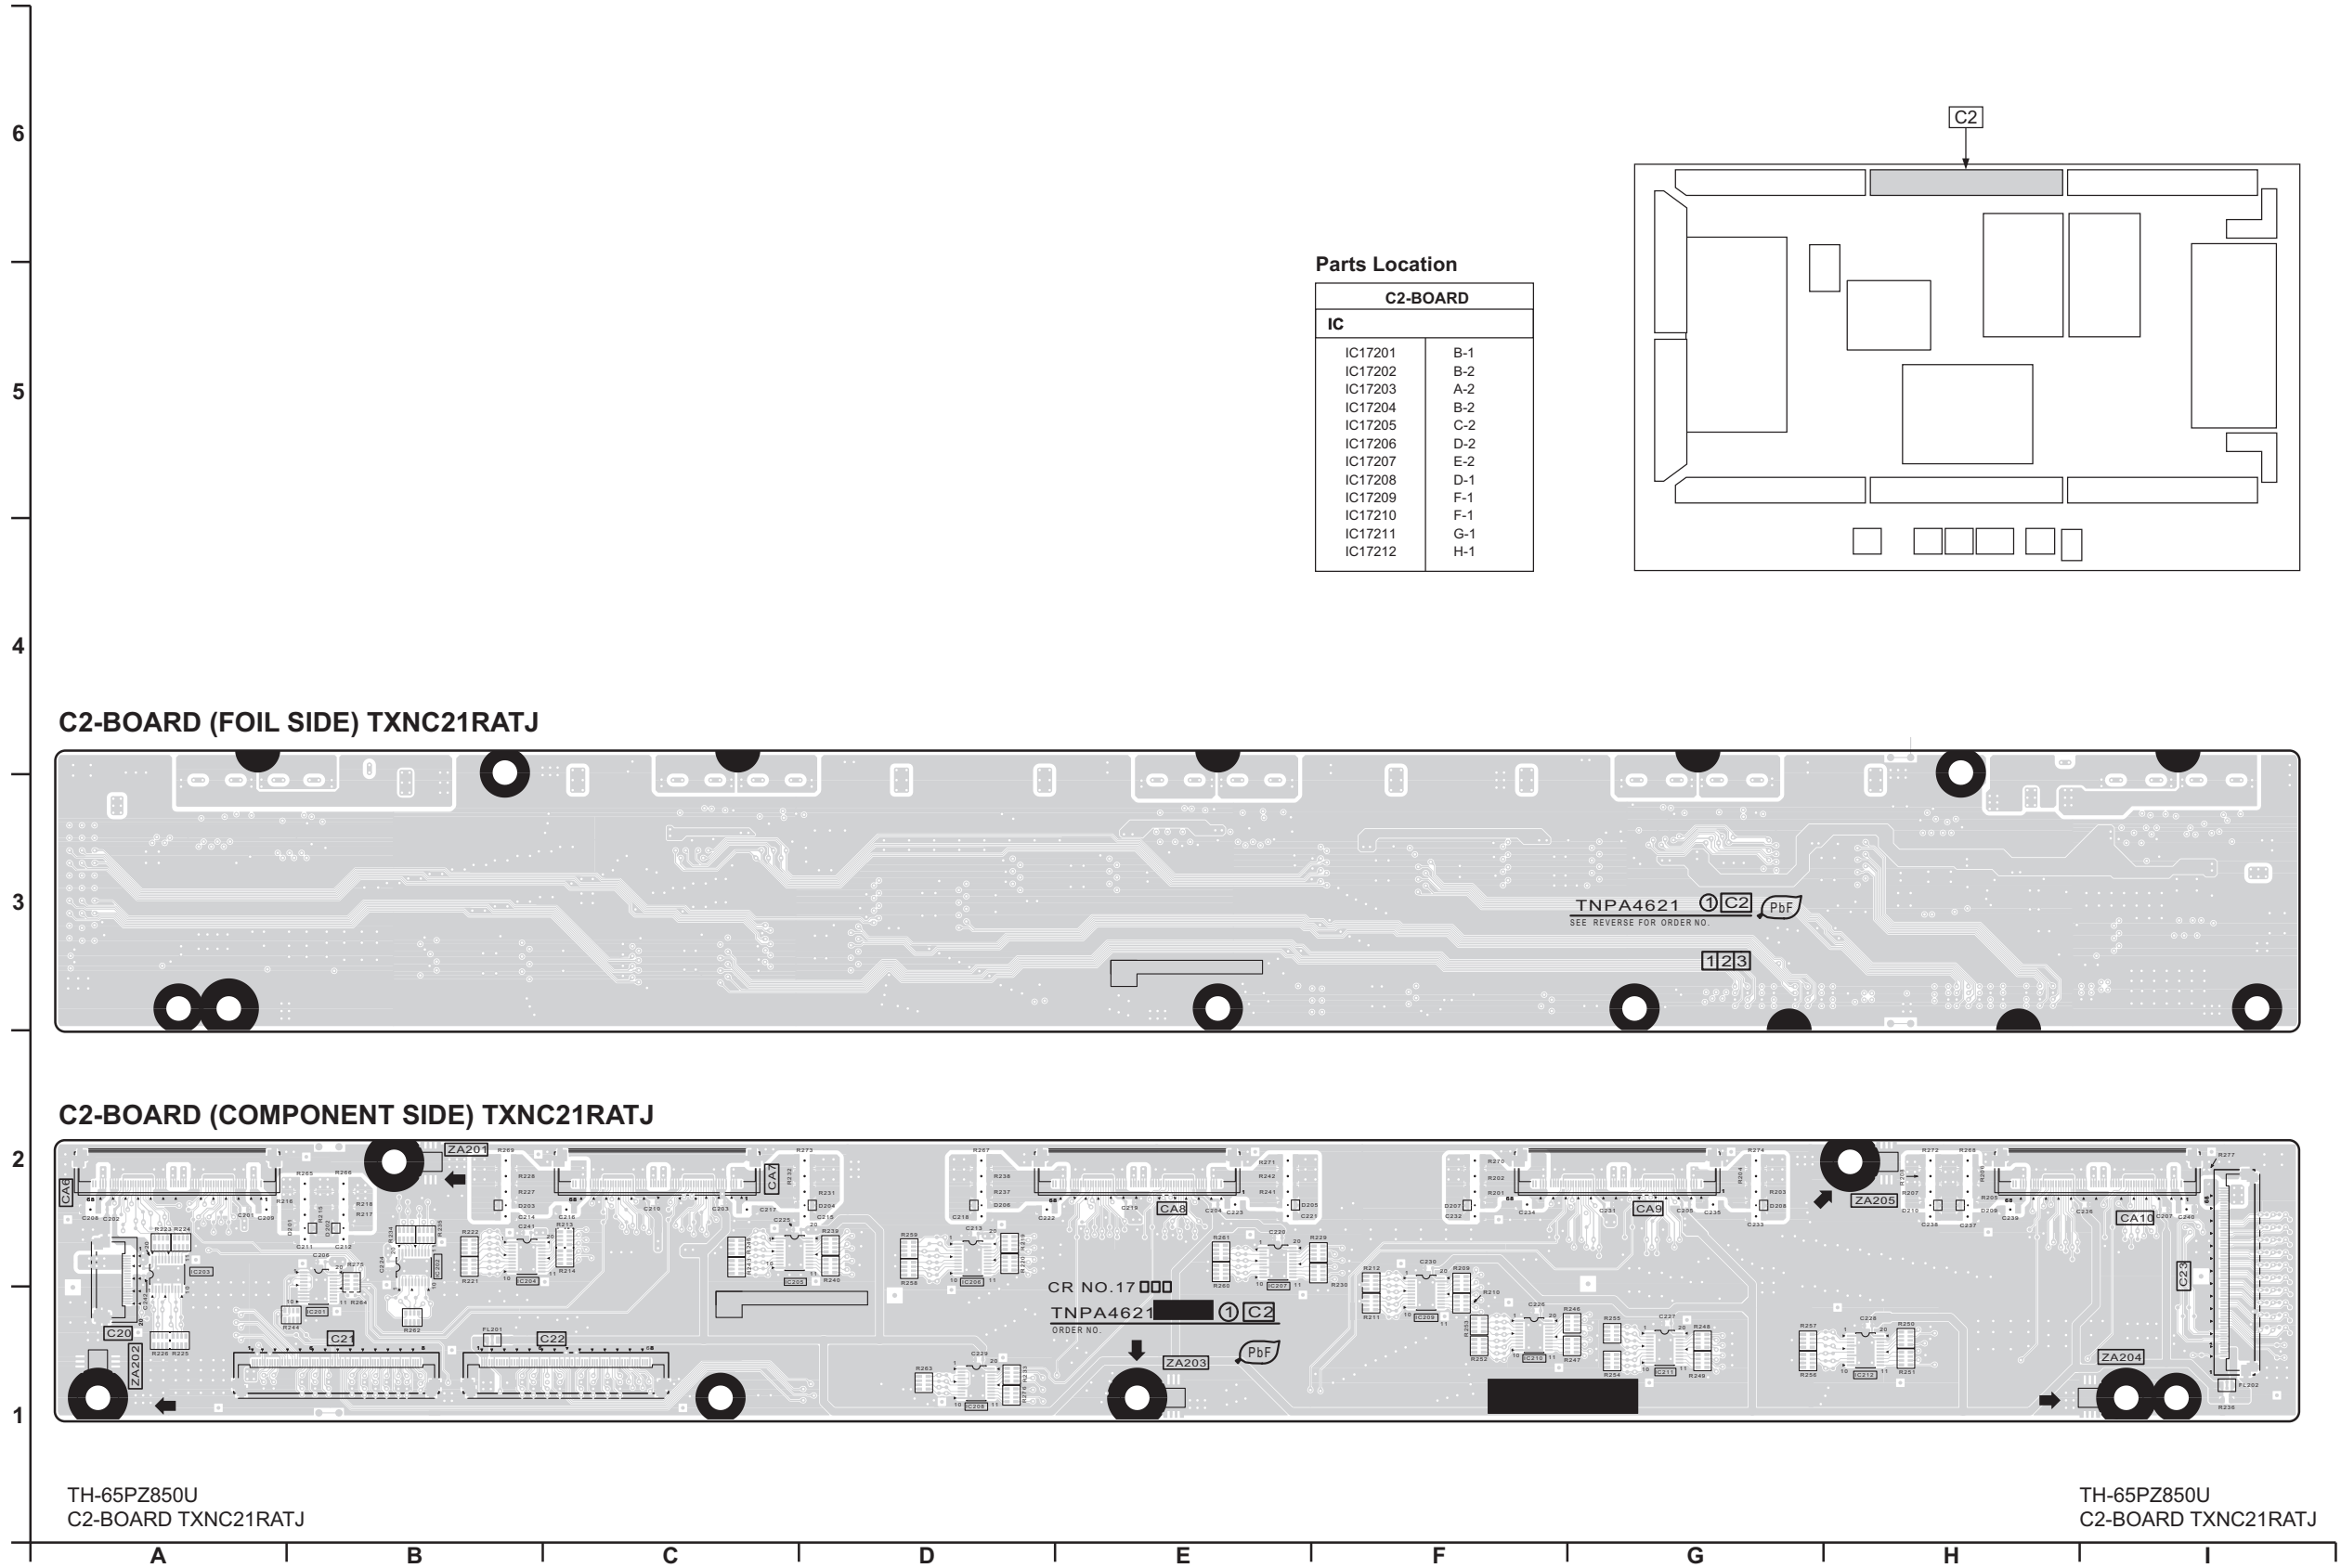


12.9. C3-Board

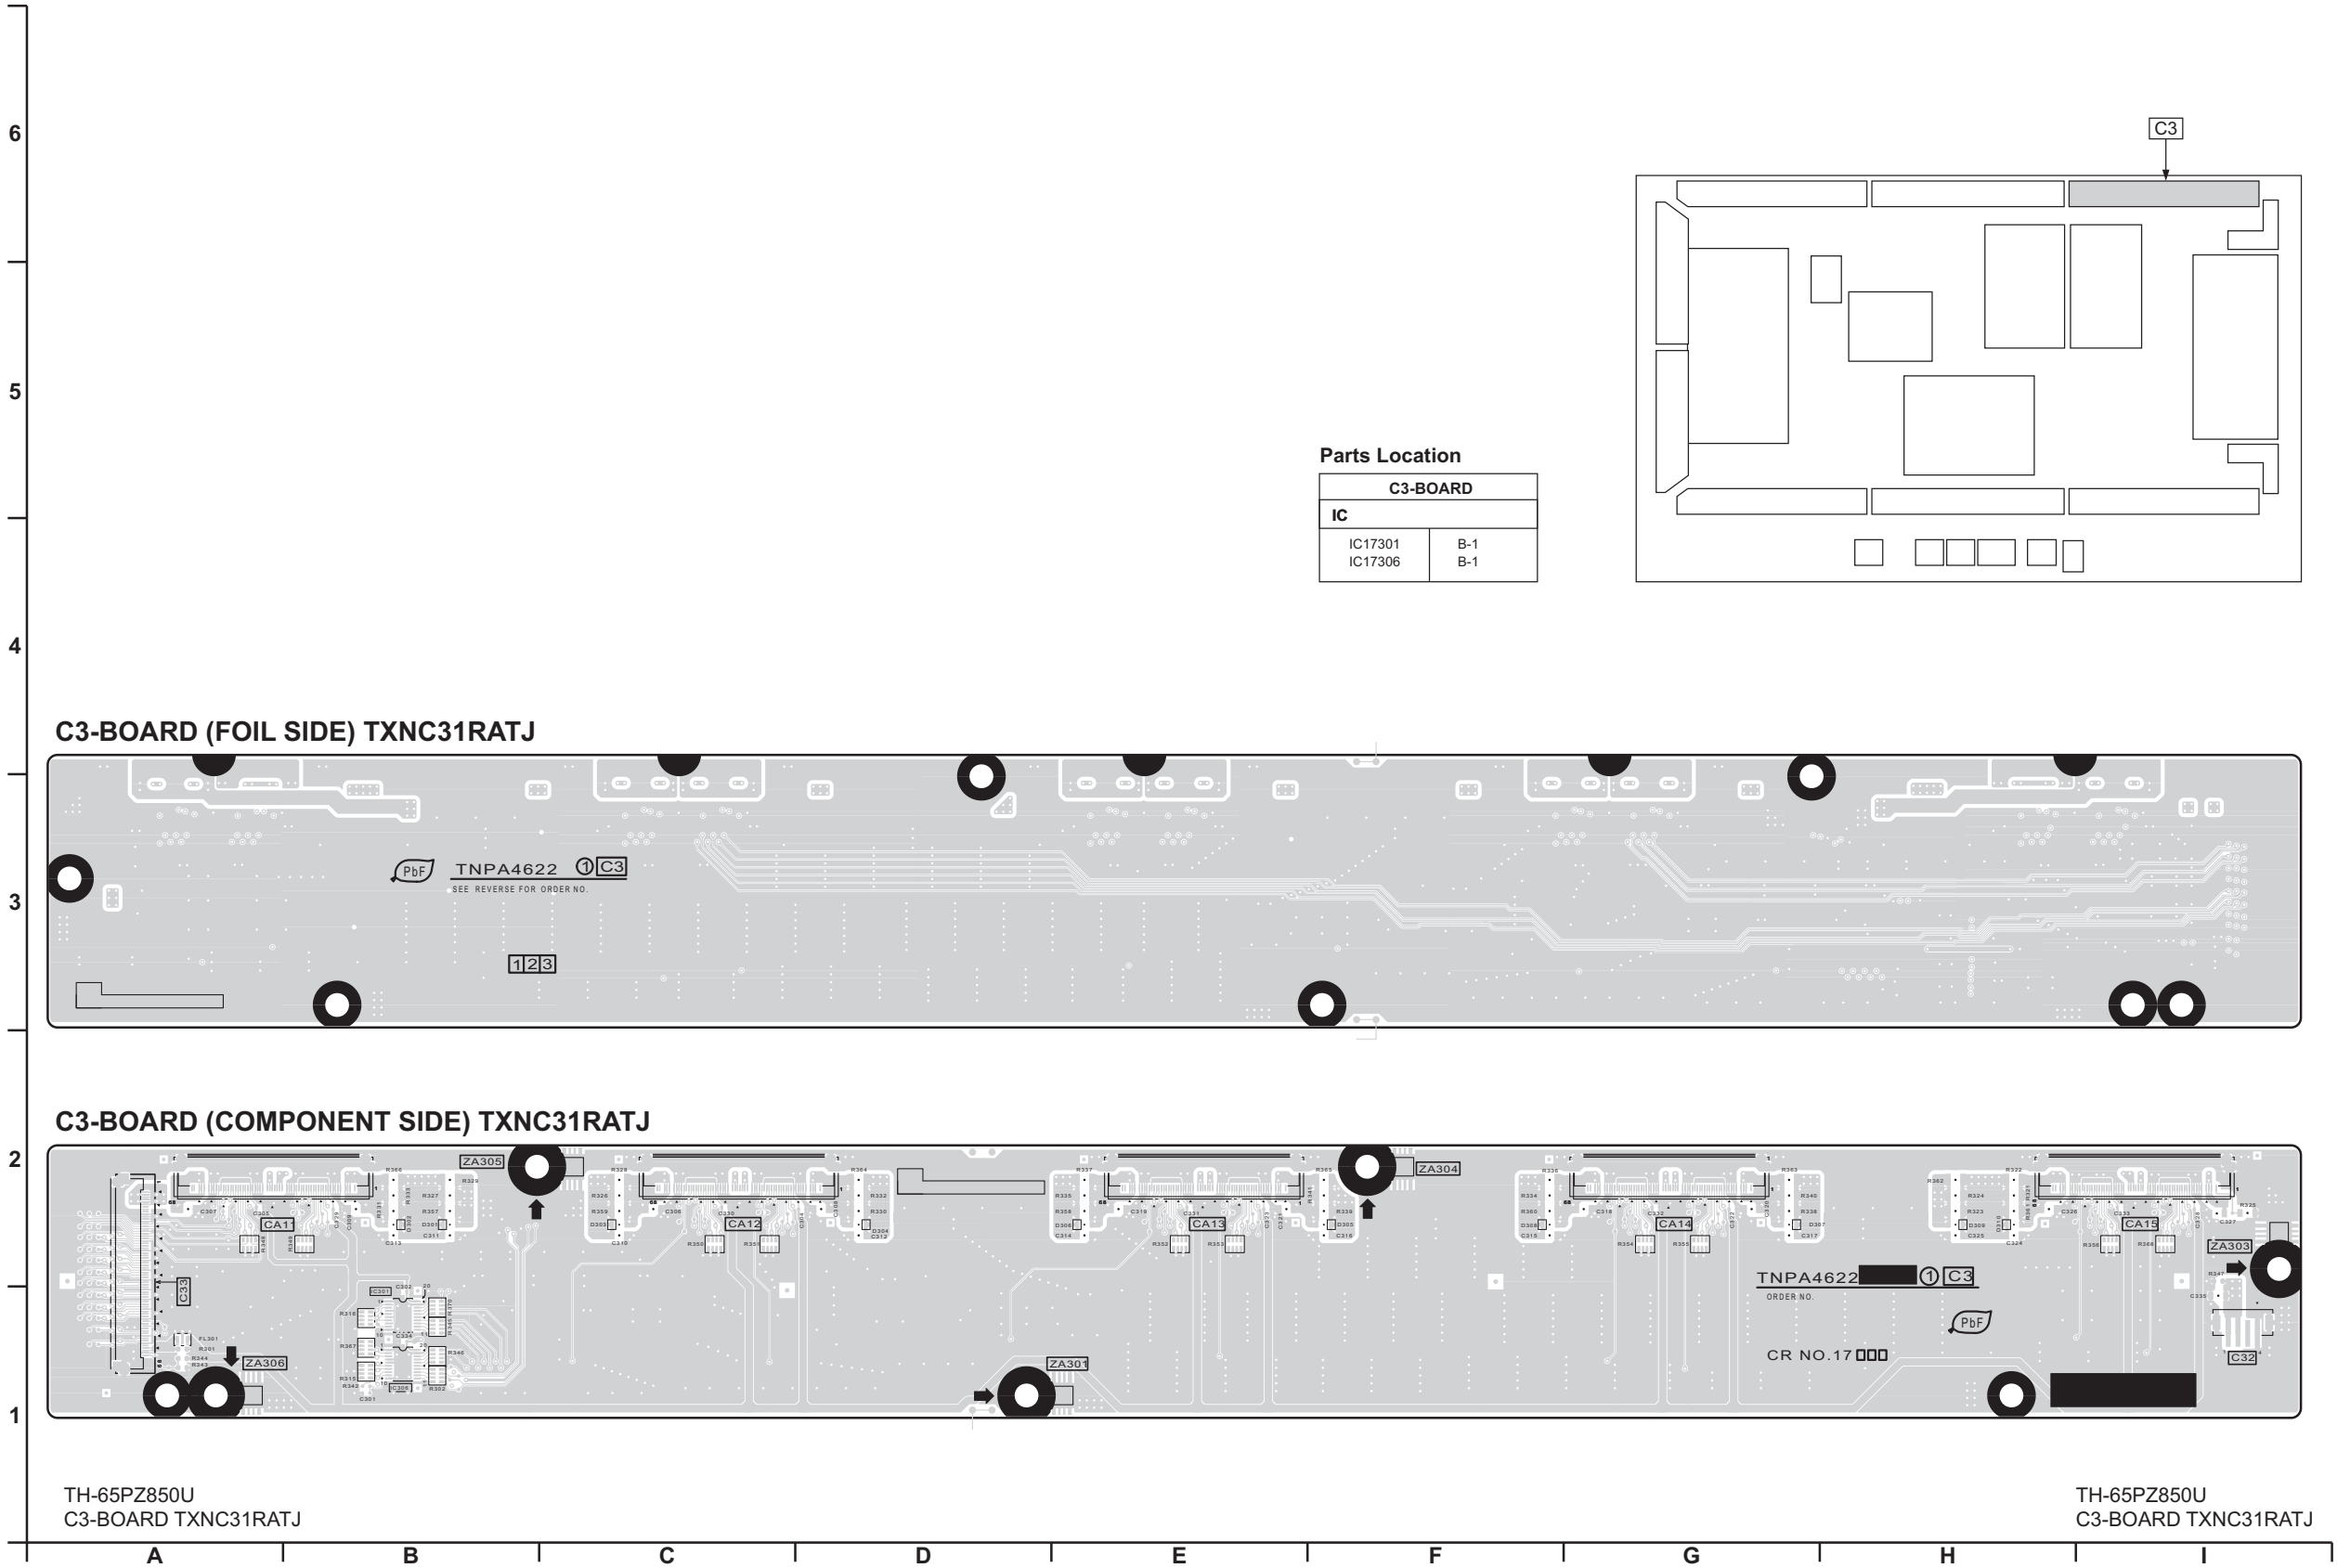


12.10. C4-Board

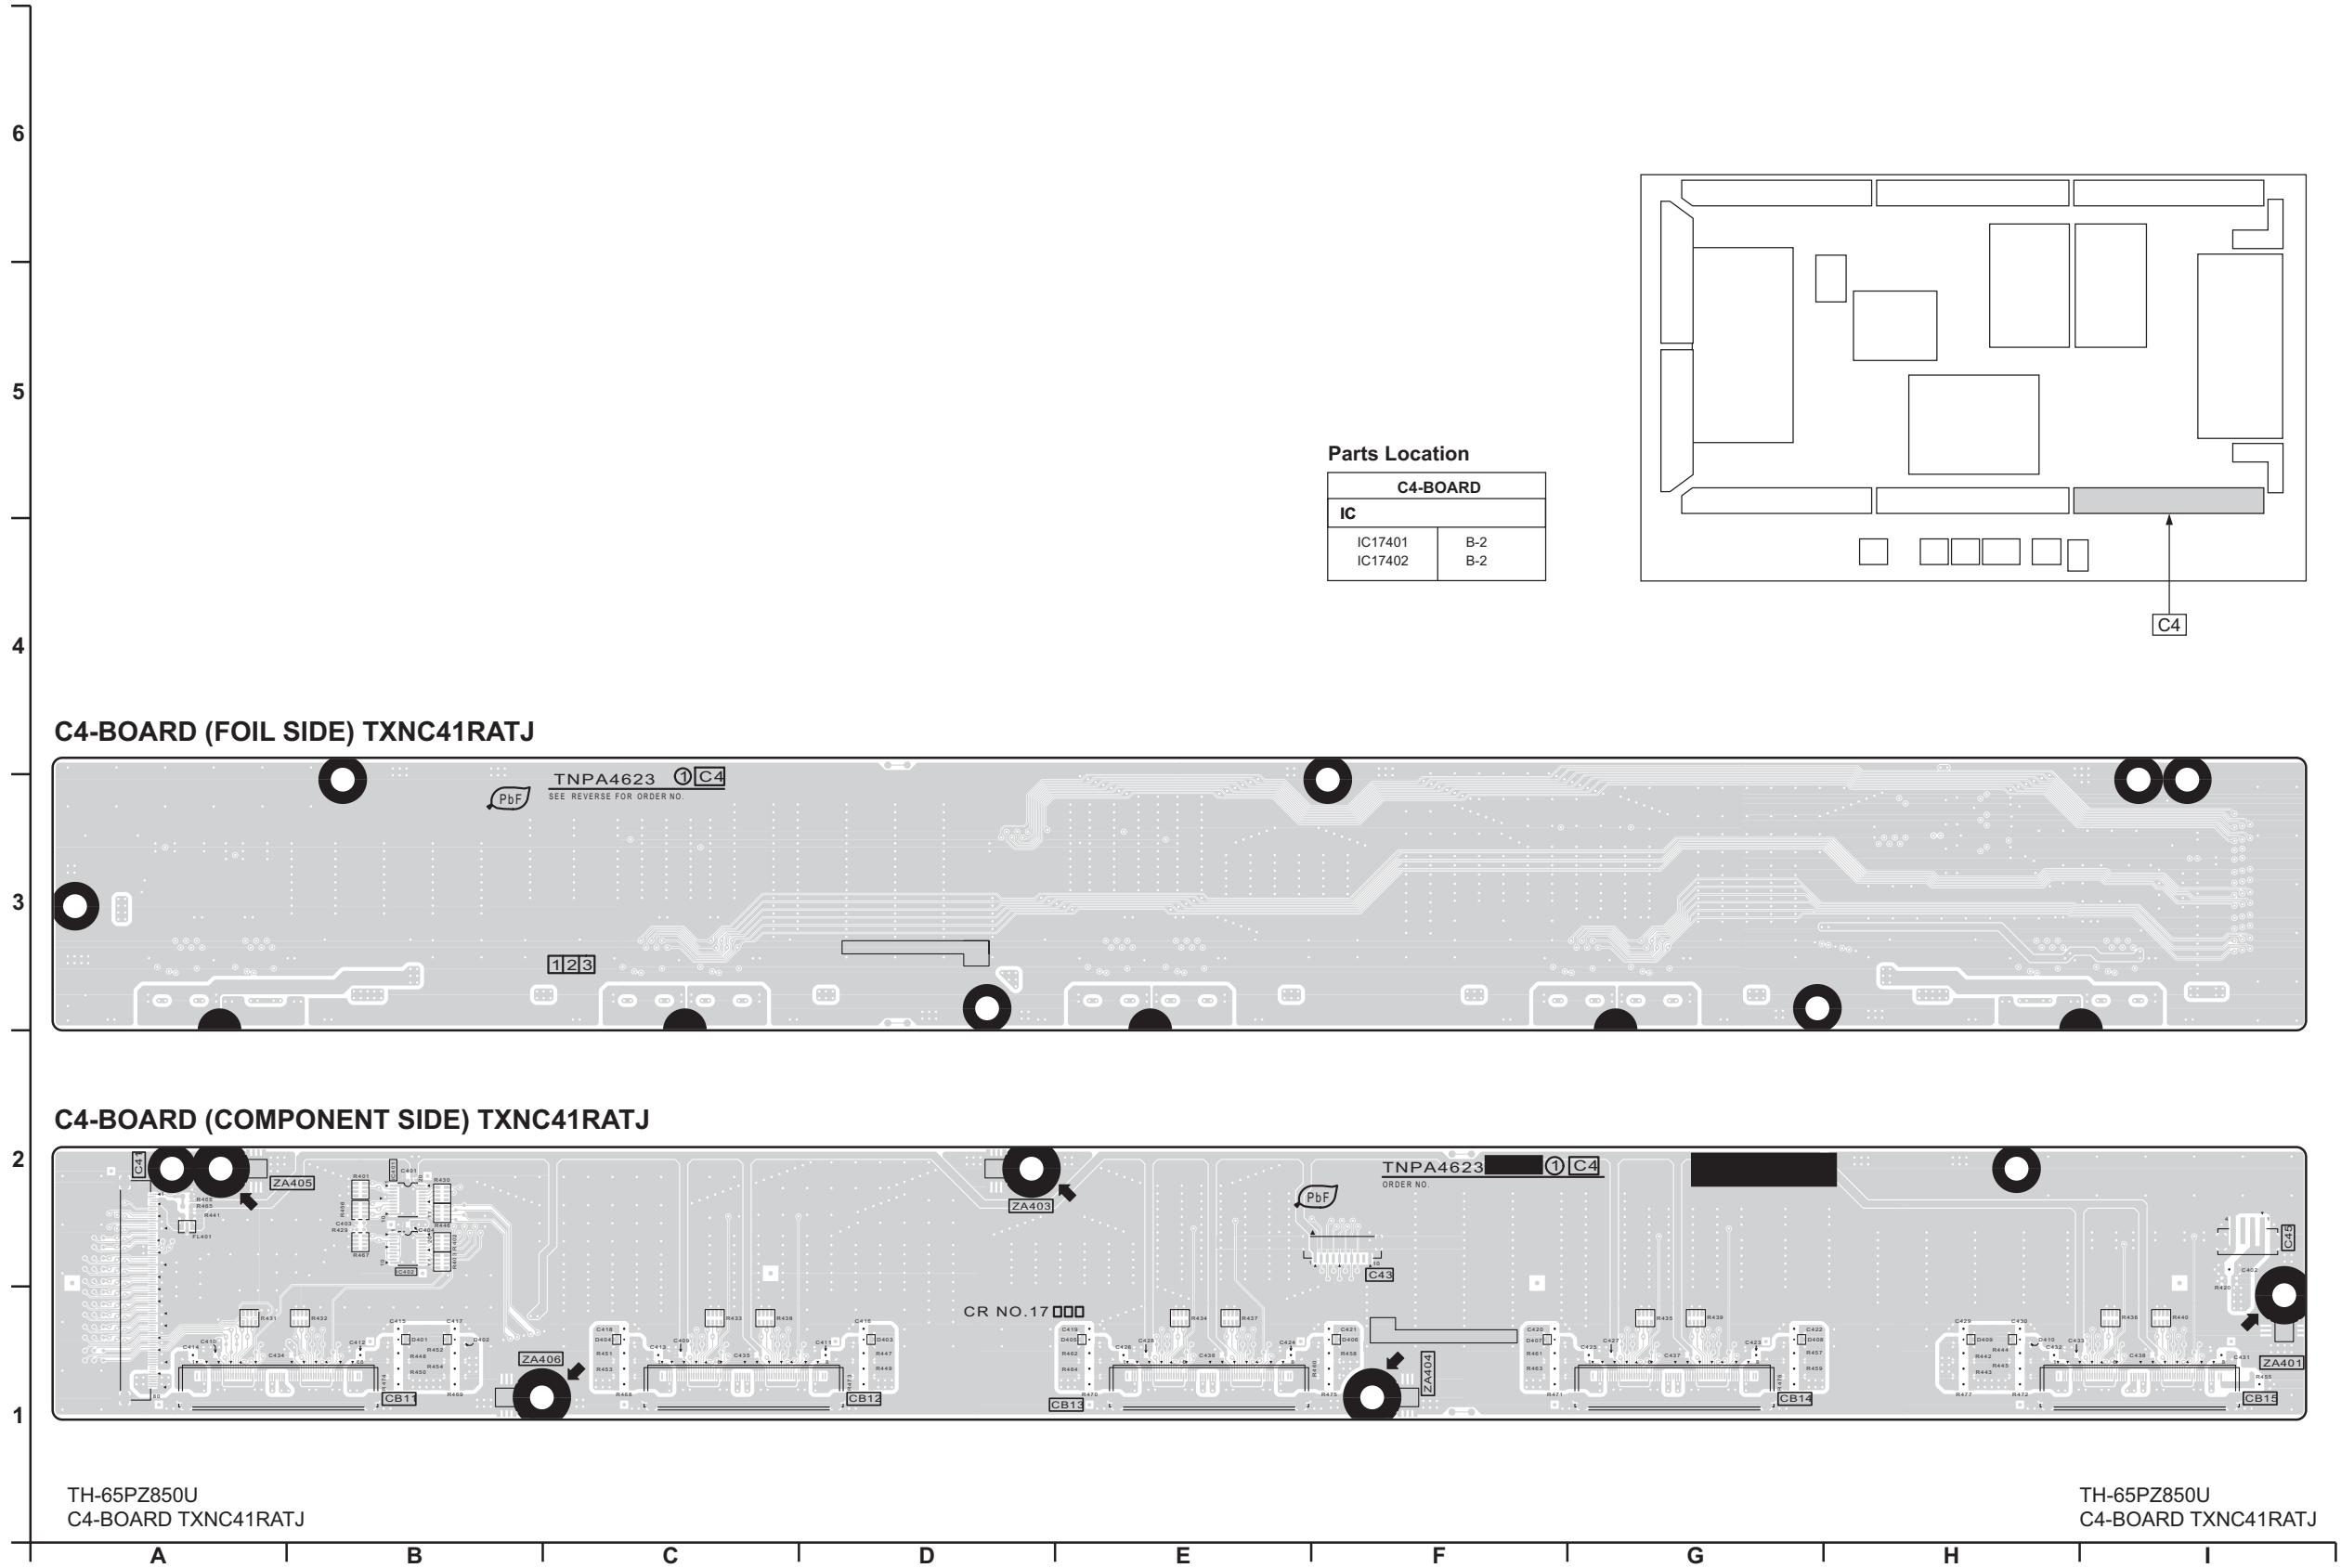

12.11. C5-Board

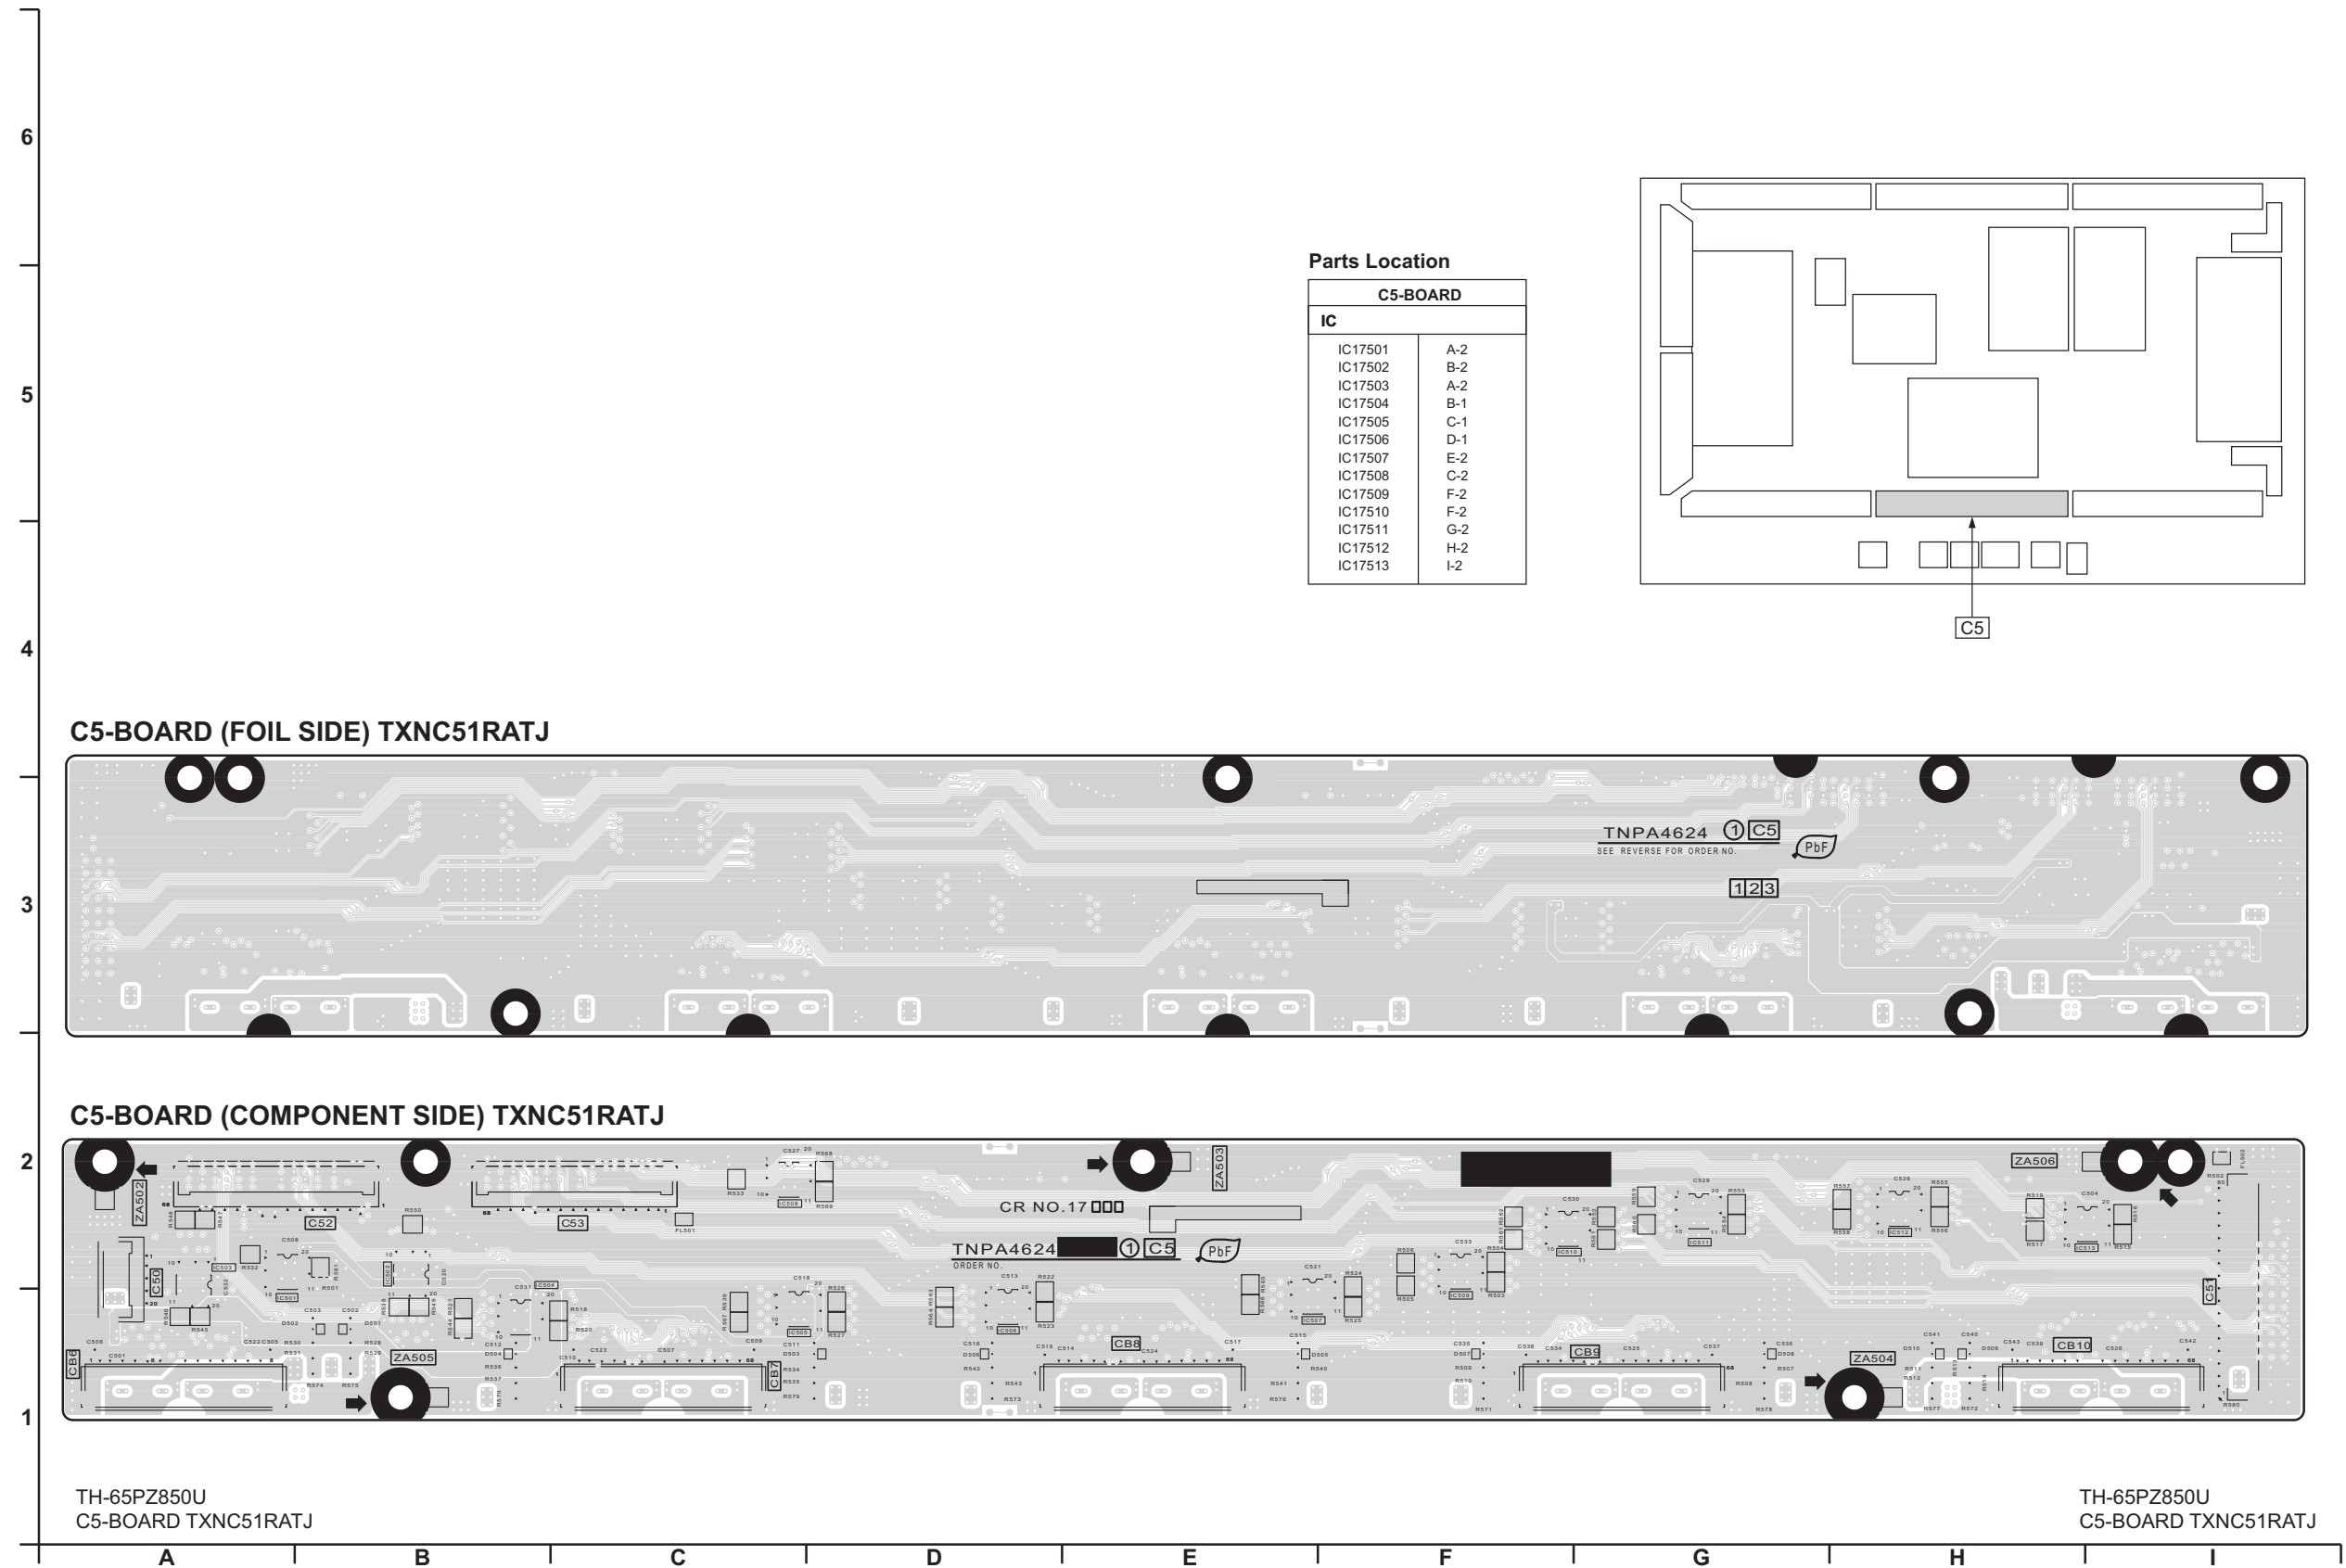


12.12. C6-Board

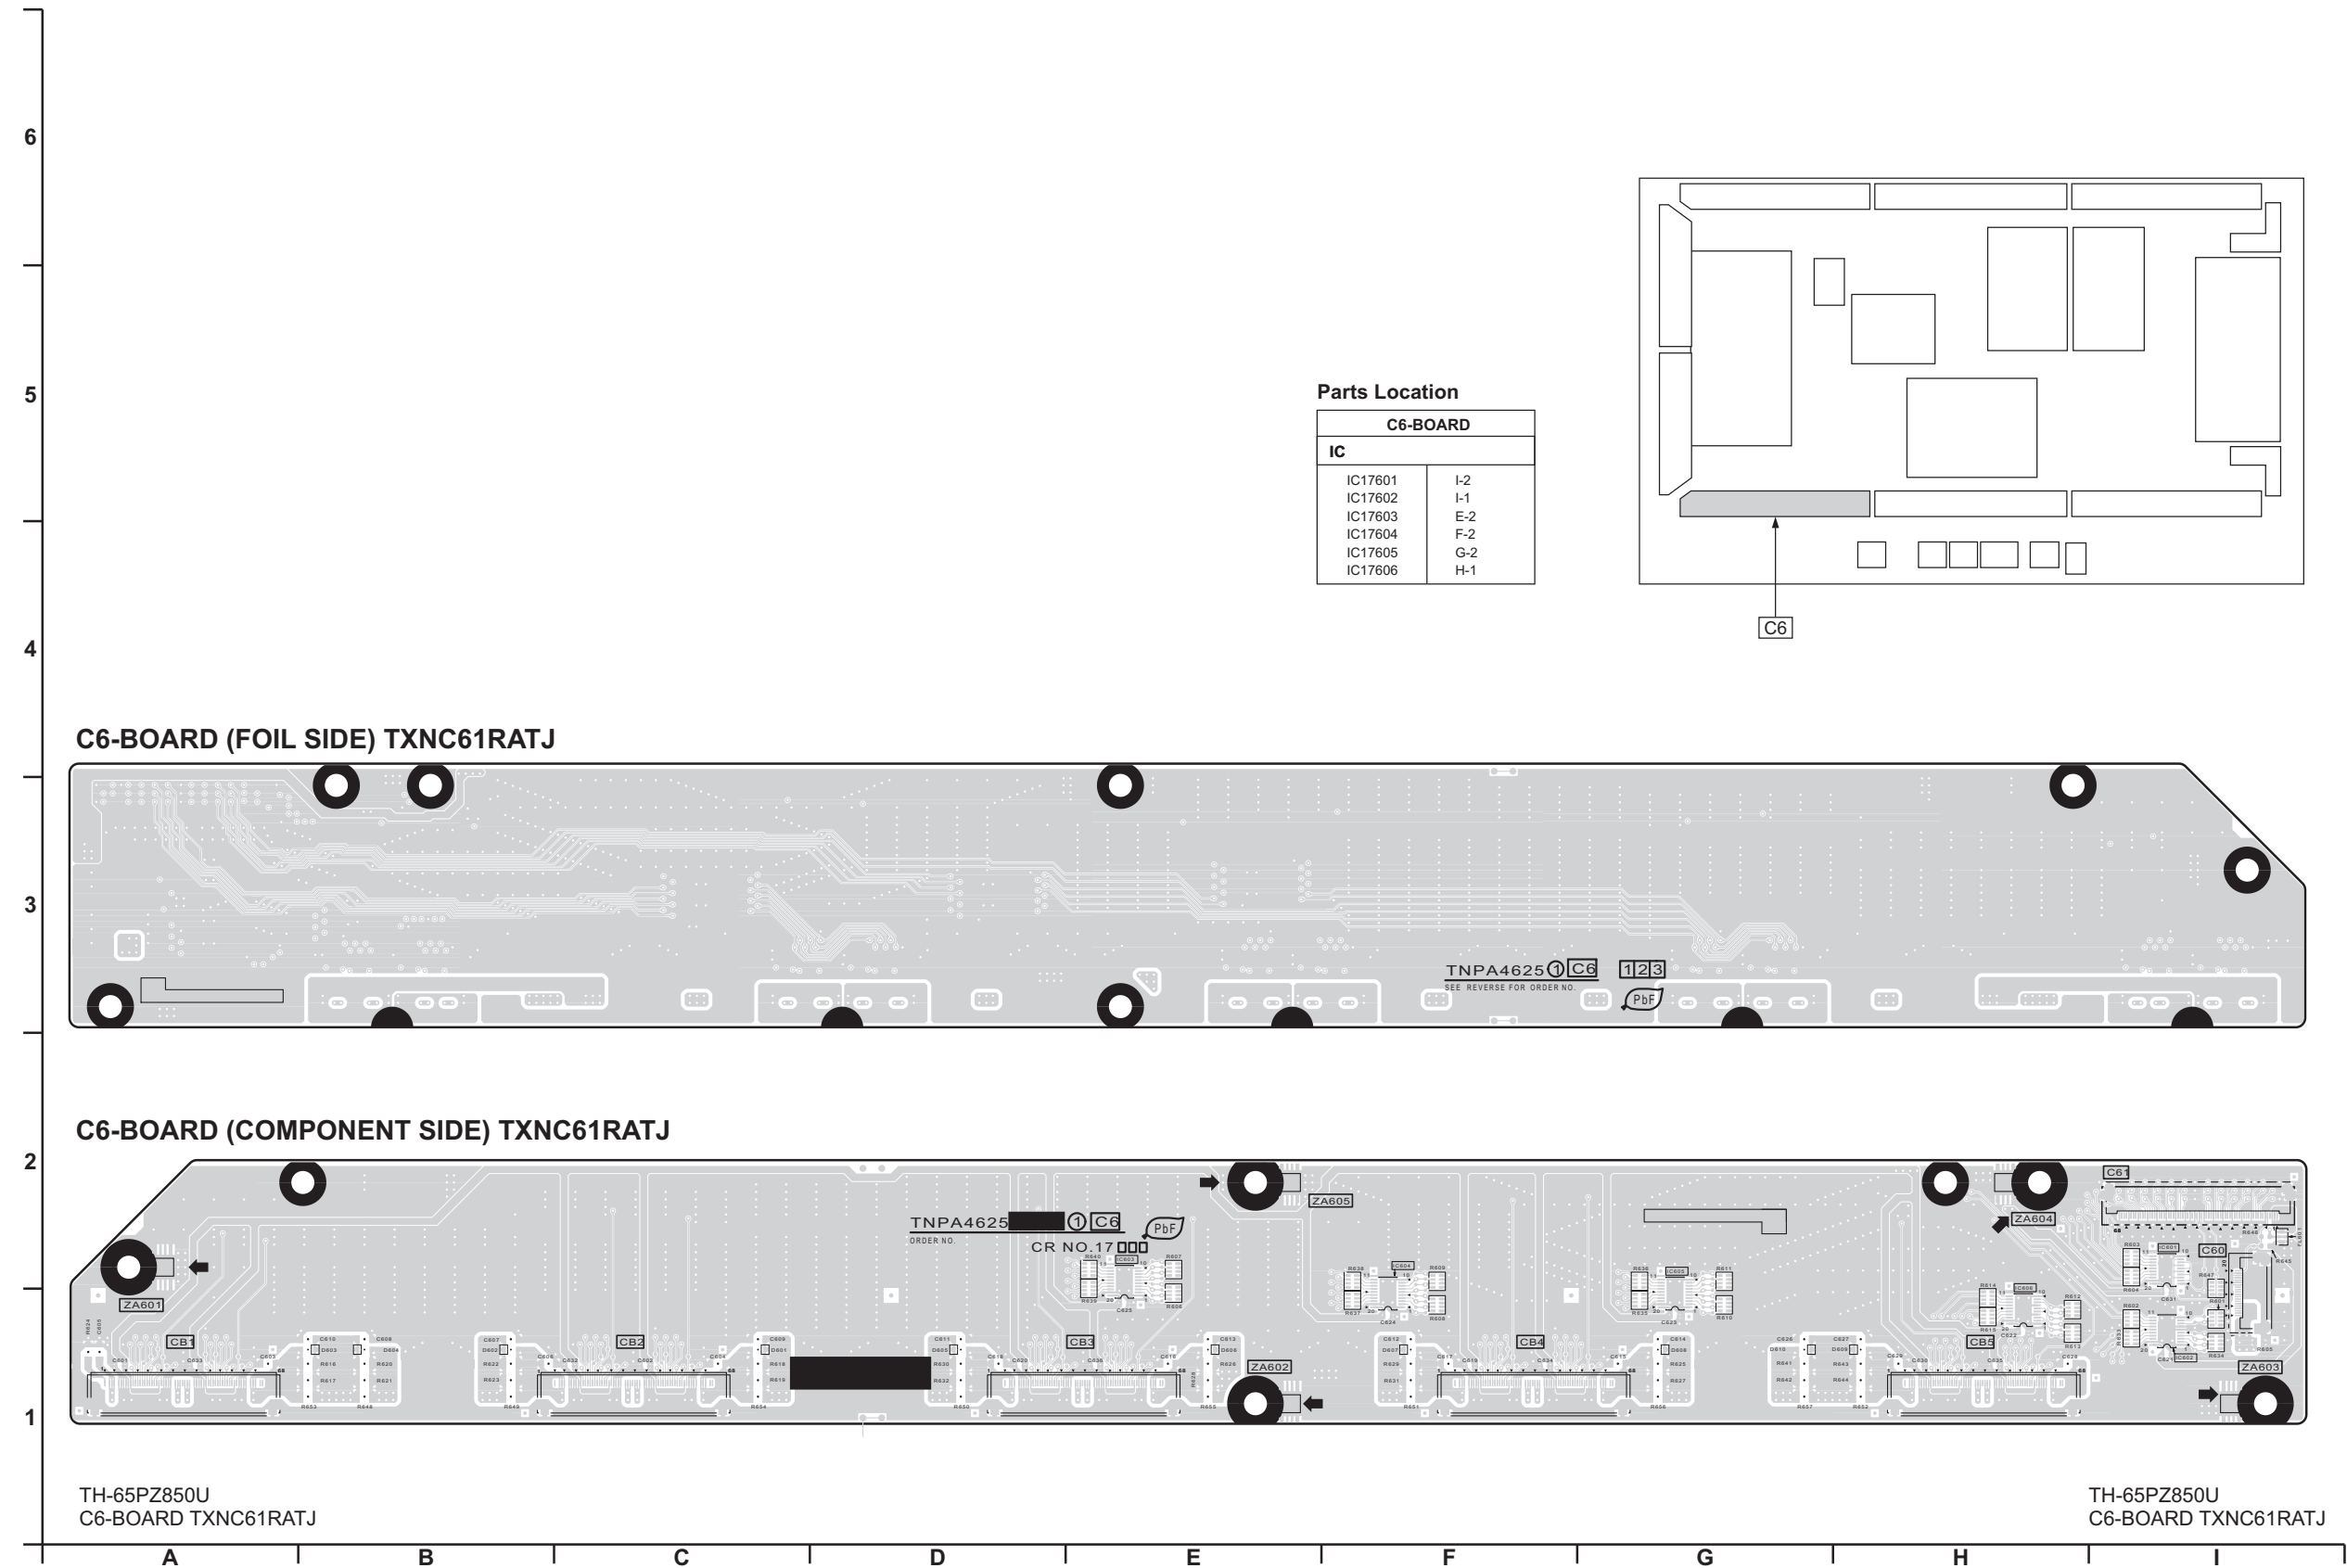


12.13. SC-Board

Parts Location

SC-BOARD (FOIL SIDE)													
IC		Q16441	D-1	TEST POINT		TP19	H-2	TP38	H-2	TP63	G-4	TP94	H-2
IC16784	H-2	Q16442	D-1	TP1	A-1	TP20	H-1	TP39	H-2	TP64	H-3	TP95	I-2
IC16786	I-2	Q16443	D-1	TP2	A-1	TP21	H-2	TP40	H-2	TP65	H-3	TP96	D-4
IC16788	H-3	Q16444	C-1	TP4	A-1	TP22	H-2	TP41	F-4	TP66	I-3	VOLUME	
IC16791	I-3	Q16451	F-1	TP5	A-1	TP23	H-1	TP42	F-4	TP70	H-2		
TRANSISTOR		Q16452	F-1	TP6	A-1	TP24	I-2	TP43	F-4	TP78	G-4	VR16600	G-2
Q16401	B-3	Q16453	F-1	TP7	H-1	TP25	I-2	TP44	F-4	TP79	G-4	VR16602	H-3
Q16402	B-3	Q16454	G-1	TP8	I-2	TP26	I-2	TP45	F-4	TP80	G-4		
Q16403	B-3	Q16601	G-3	TP9	H-1	TP27	I-2	TP51	G-4	TP81	G-4		
Q16404	B-3	Q16621	C-3	TP10	H-2	TP28	I-2	TP52	H-2	TP83	H-4		
Q16405	B-2	Q16622	C-2	TP11	H-2	TP29	I-2	TP54	B-4	TP84	H-4		
Q16406	B-2	Q16623	B-2	TP12	I-1	TP30	I-2	TP55	B-4	TP85	H-4		
Q16421	E-3	Q16641	F-3	TP13	I-1	TP31	H-1	TP56	B-4	TP86	H-4		
Q16422	E-3	Q16642	F-3	TP14	H-2	TP32	I-1	TP57	B-4	TP88	I-1		
Q16423	E-3	Q16643	G-2	TP15	H-2	TP33	I-1	TP58	B-4	TP89	I-2		
Q16424	E-2	Q16644	G-2	TP16	H-1	TP34	H-1	TP59	G-4	TP90	C-2		
Q16425	E-2	Q16661	G-3	TP17	I-1	TP35	I-2	TP60	G-4	TP91	B-2		
		Q16796	H-4	TP18	H-2	TP36	I-2	TP61	G-4	TP92	G-2		
						TP37	I-1	TP62	G-4	TP93	H-2		

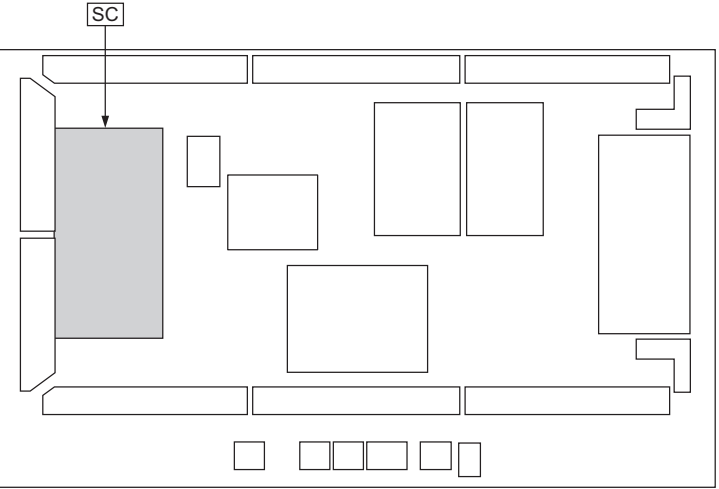

SC-BOARD (FOIL SIDE)
TXNSC1RATJ

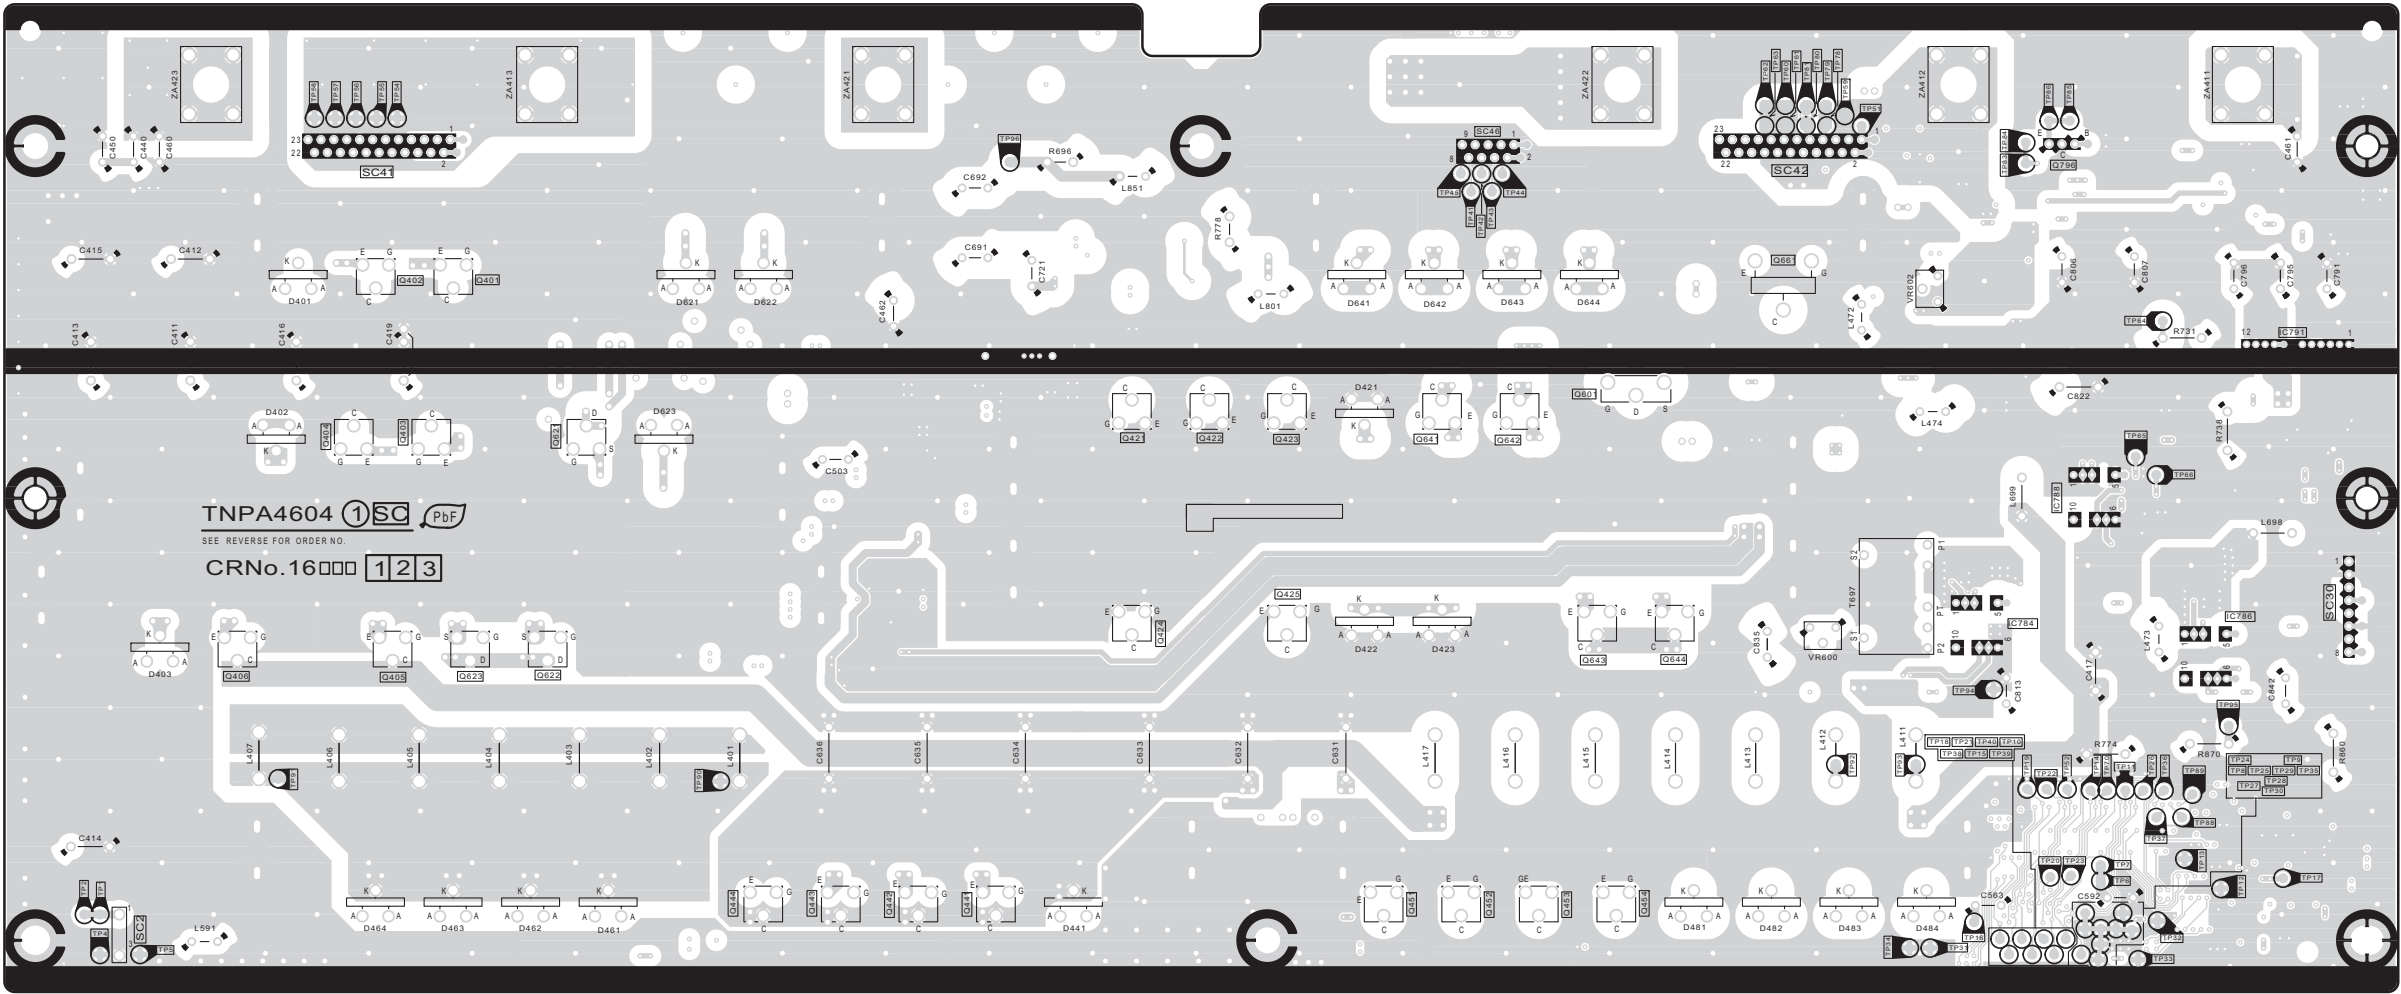


TH-65PZ850U
SC-BOARD TXNSC1RATJ

TH-65PZ850U
SC-BOARD TXNSC1RATJ

6
5


Parts Location

SC-BOARD (COMPONENT SIDE)														
IC		IC16787	A-2	TRANSISTOR		Q16453	D-1	Q16609	C-3	Q16781	D-3	TEST POINT		
IC16464	F-2	IC16788	B-3			Q16454	D-1	Q16621	G-3	Q16795	B-4			
IC16465	F-2	IC16789	B-3	Q16401	H-3	Q16471	E-4	Q16622	G-2	Q16796	B-4	TP3	A-1	
IC16471	E-3	IC16791	A-3	Q16402	H-3	Q16501	G-3	Q16623	H-2	Q16801	A-4	TP46	B-1	
IC16501	F-3	IC16792	C-4	Q16403	H-3	Q16502	G-3	Q16641	D-3	Q16810	B-4	TP82	B-1	
IC16521	F-3	IC16801	B-4	Q16404	H-3	Q16503	G-3	Q16642	D-3	Q16814	B-2	TPSC1	E-4	
IC16561	B-1			Q16405	H-2	Q16521	F-3	Q16643	D-2	Q16815	B-2	TPSOS6	A-1	
IC16562	B-1	PHOTO COUPLER		Q16406	I-2	Q16522	F-3	Q16644	C-2	Q16816	B-3	TPSOS7	A-1	
IC16563	A-1			Q16421	E-3	Q16523	F-3	Q16661	C-3	Q16817	A-2	TPVAD	C-3	
IC16564	C-4	PC16461	F-2	Q16422	E-3	Q16531	G-1	Q16662	B-3	Q16871	A-2	TPVSCN	B-2	
IC16581	A-1	PC16480	E-3	Q16423	E-3	Q16532	G-1	Q16663	B-4	Q16872	B-3	TPVSET	C-3	
IC16724	F-4	PC16601	B-3	Q16424	E-2	Q16551	E-1	Q16664	B-4	Q16873	A-3	TPVSUS	I-1	
IC16725	E-4	PC16603	C-3	Q16425	E-2	Q16552	E-1	Q16665	A-4	Q16874	B-3			
IC16771	F-2	PC16684	B-3	Q16441	F-1	Q16601	D-3	Q16666	C-3	Q16875	A-3			
IC16772	B-4	PC16685	F-3	Q16442	F-1	Q16602	C-3	Q16667	A-4	Q16876	A-1			
IC16773	A-4	PC16896	B-2	Q16443	F-1	Q16603	C-3	Q16701	A-4	Q16879	A-3			
IC16774	B-2	PC16897	B-2	Q16444	G-1	Q16604	C-3	Q16702	B-4	Q16881	B-2			
IC16784				Q16445	D-1	Q16606	D-3	Q16743	B-4	Q16882	B-3			
IC16786	B-2			Q16452	D-1	Q16607	C-3	Q16762	F-3					

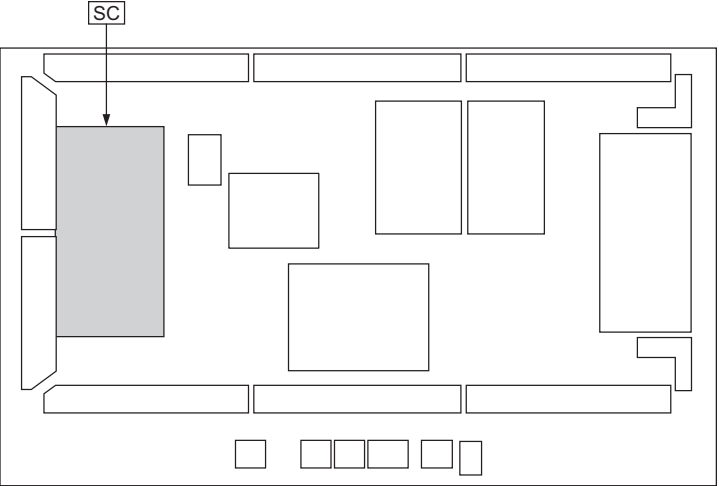

SC-BOARD (COMPONENT SIDE)
TXNSC1RATJ

4
3
2
1

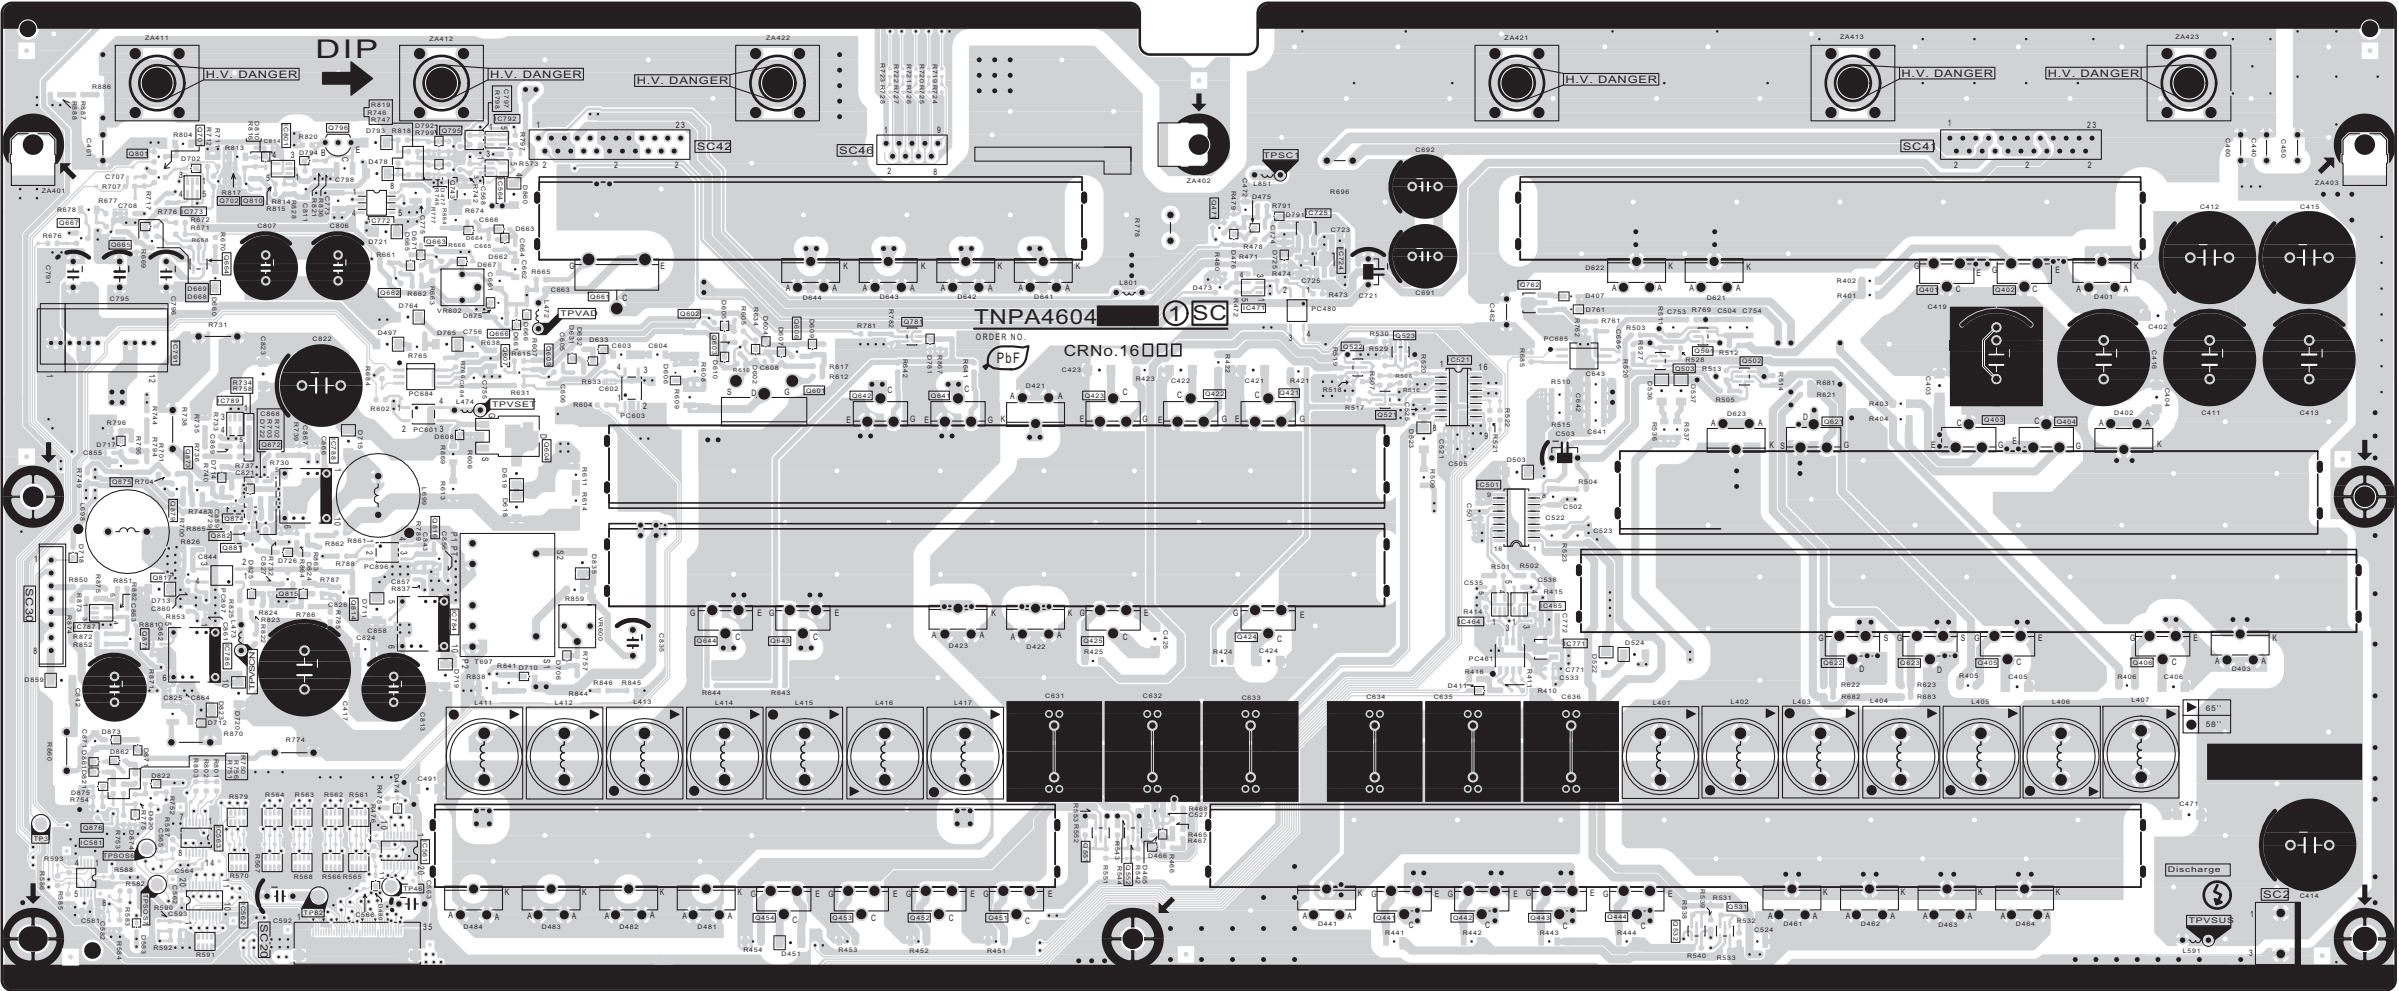

TH-65PZ850U
SC-BOARD TXNSC1RATJ


TH-65PZ850U
SC-BOARD TXNSC1RATJ

A B C D E F G H I


12.14. SU-Board

Parts Location


SU-BOARD	
IC	
IC14901	B-2
IC14902	C-2
IC14903	D-2
IC14904	D-2
IC14905	E-2
IC14906	F-2
IC14907	G-2
IC14908	H-2
TEST POINT	
TPSU1	E-2
TPSU2	E-1
TPSU3	E-1
TPSU4	A-1
TPSU5	A-1
TPSU6	I-1
TPSU7	I-1

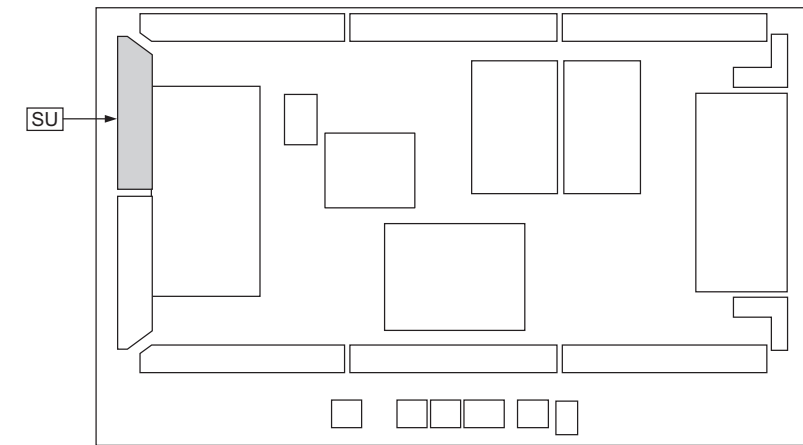

SU-BOARD (FOIL SIDE) TXNSU1RATJ

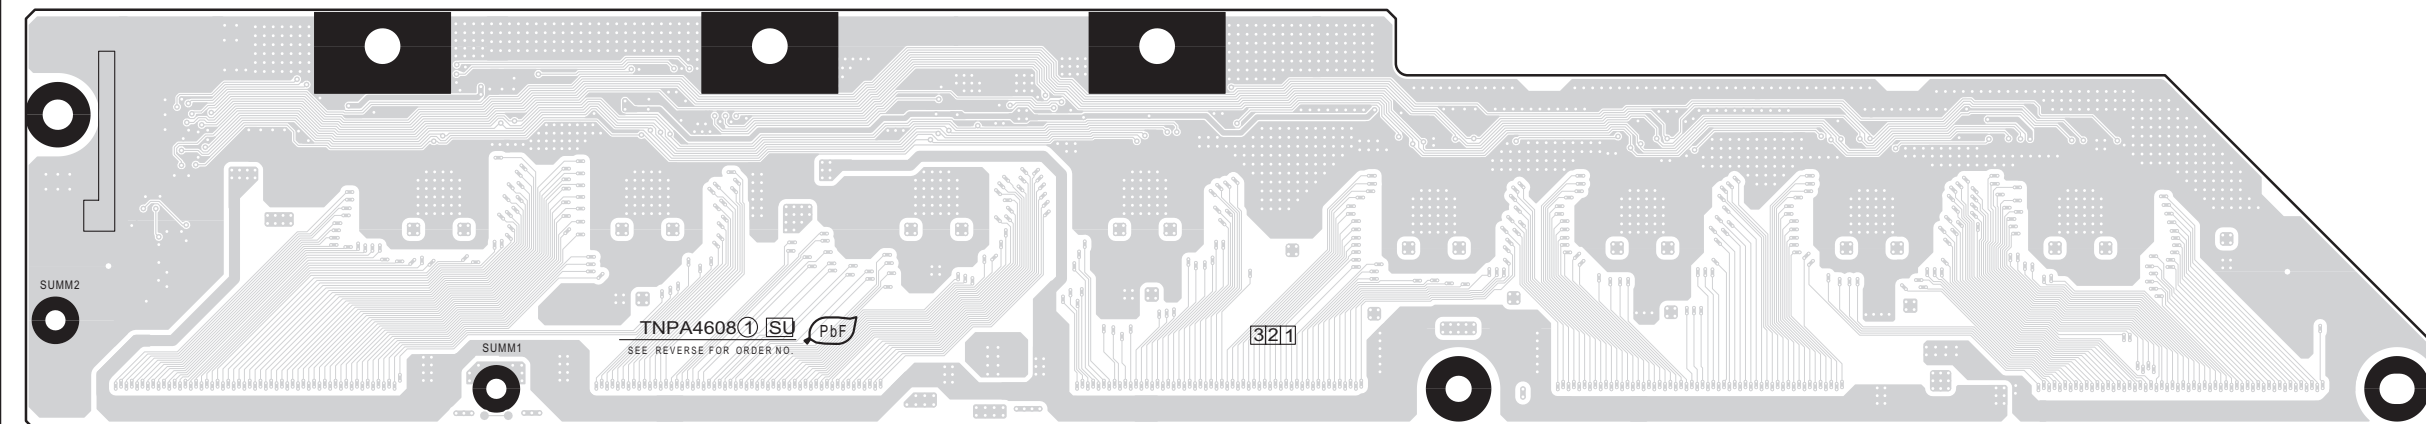

SU-BOARD (COMPONENT SIDE) TXNSU1RATJ

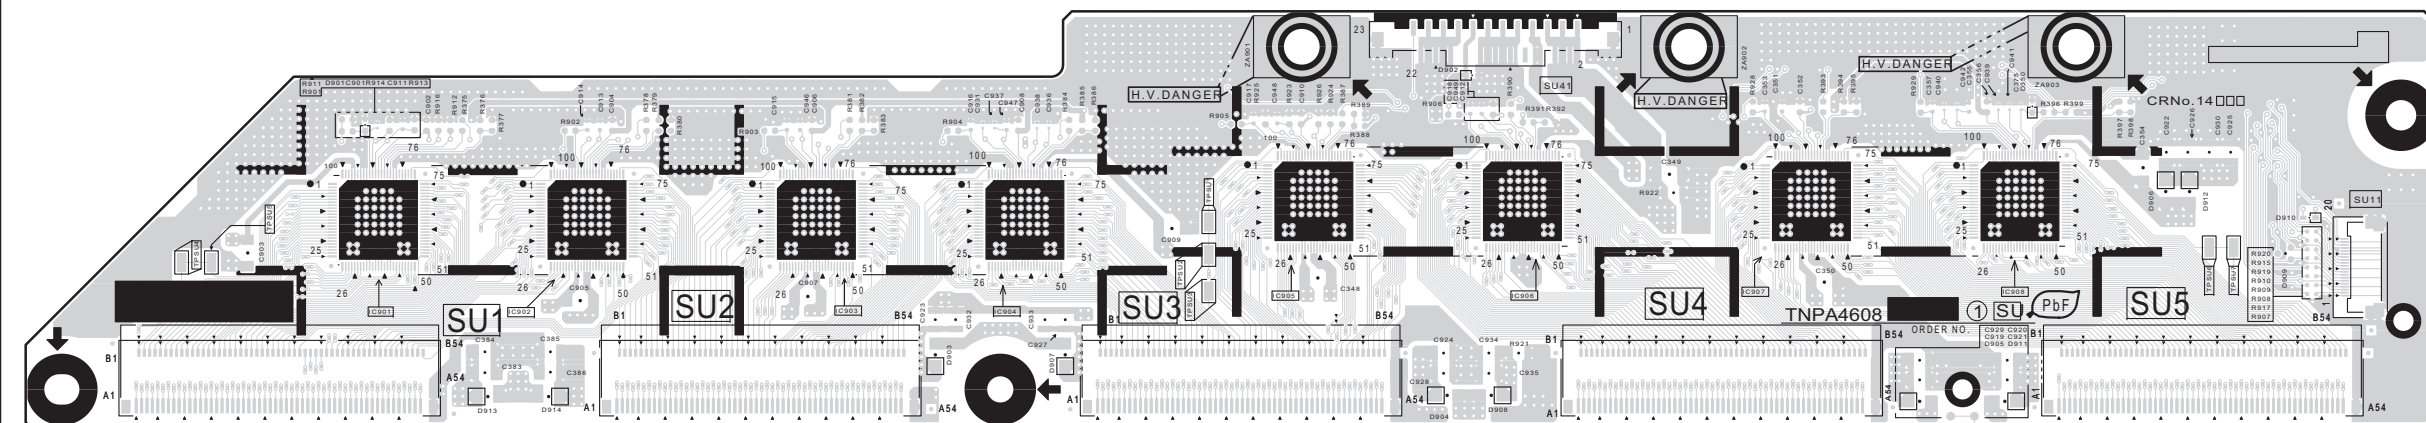


TH-65PZ850U
SU-BOARD TXNSU1RATJ

TH-65PZ850U
SU-BOARD TXNSU1RATJ


12.15. SD-Board

Parts Location


SD-BOARD	
IC	
IC14951	B-2
IC14952	C-2
IC14953	D-2
IC14954	E-2
IC14955	F-2
IC14956	G-2
IC14957	H-2
IC14958	H-2
IC14961	B-2
IC14962	B-1
IC14963	H-2
IC14964	A-2
IC14965	B-2
TEST POINT	
TPSD1	G-1
TPSD2	G-1
TPSD3	G-1
TPSD4	I-1
TPSD5	I-1

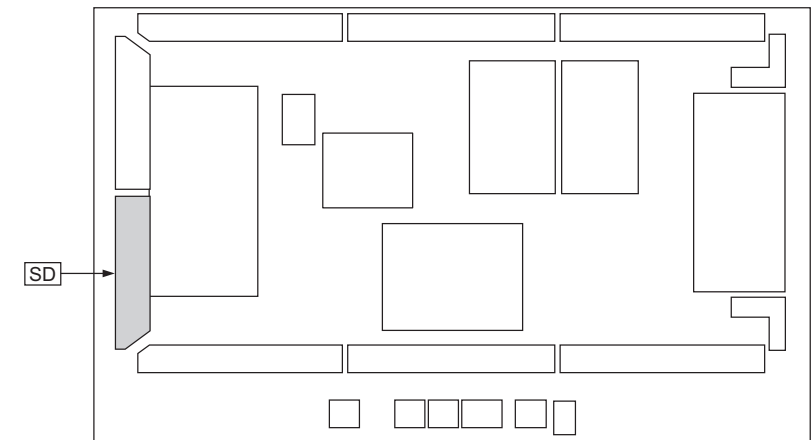

SD-BOARD (FOIL SIDE) TXNSD1RATJ

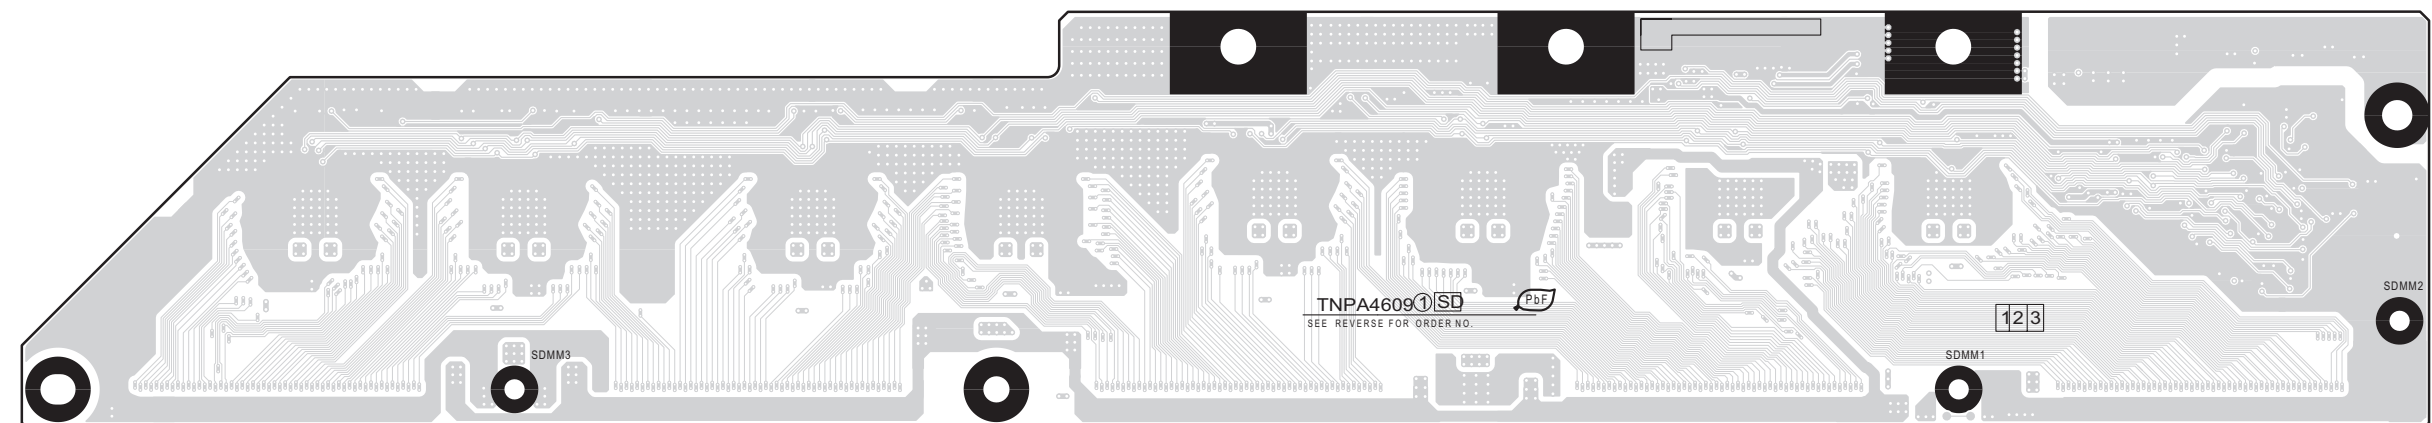


SD-BOARD (COMPONENT SIDE) TXNSD1RATJ

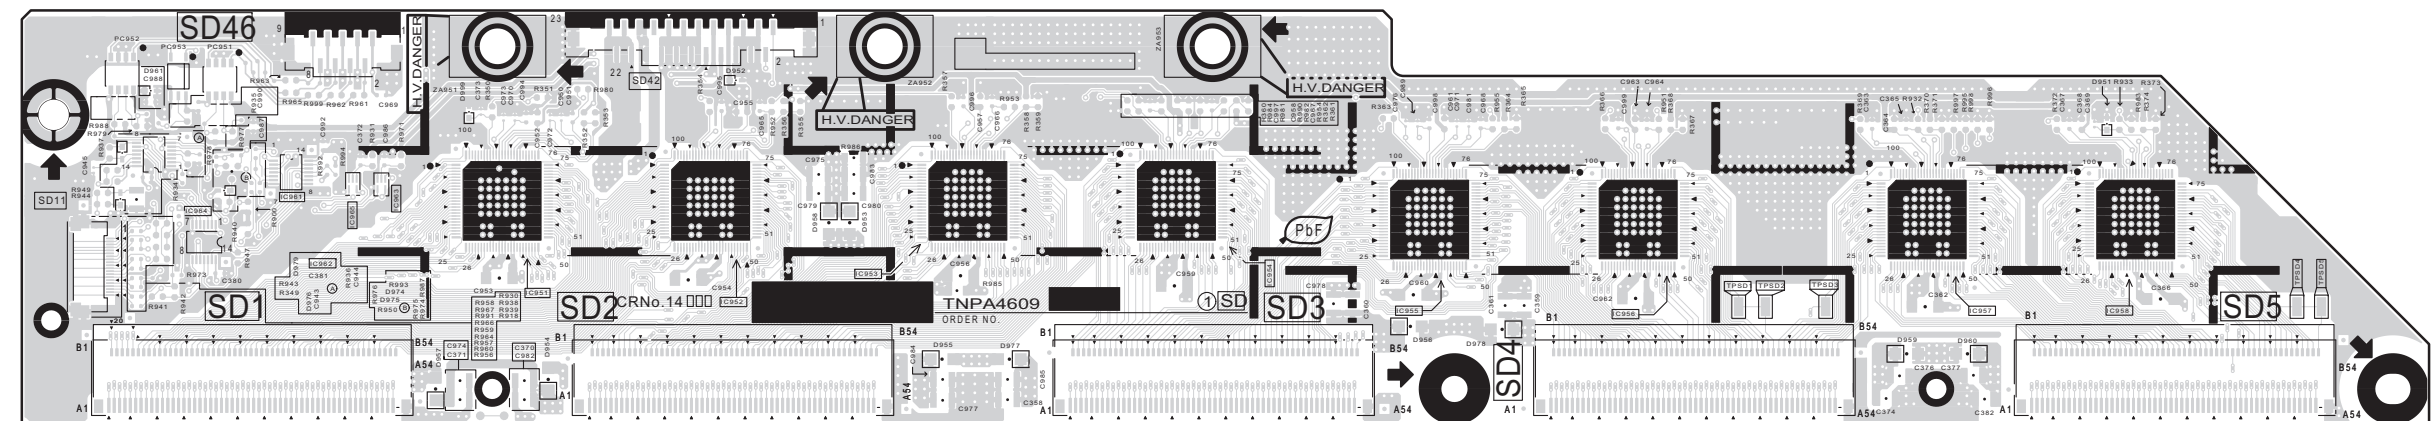

TH-65PZ850U
SD-BOARD TXNSD1RATJ

TH-65PZ850U
SD-BOARD TXNSD1RATJ


12.16. SS-Board

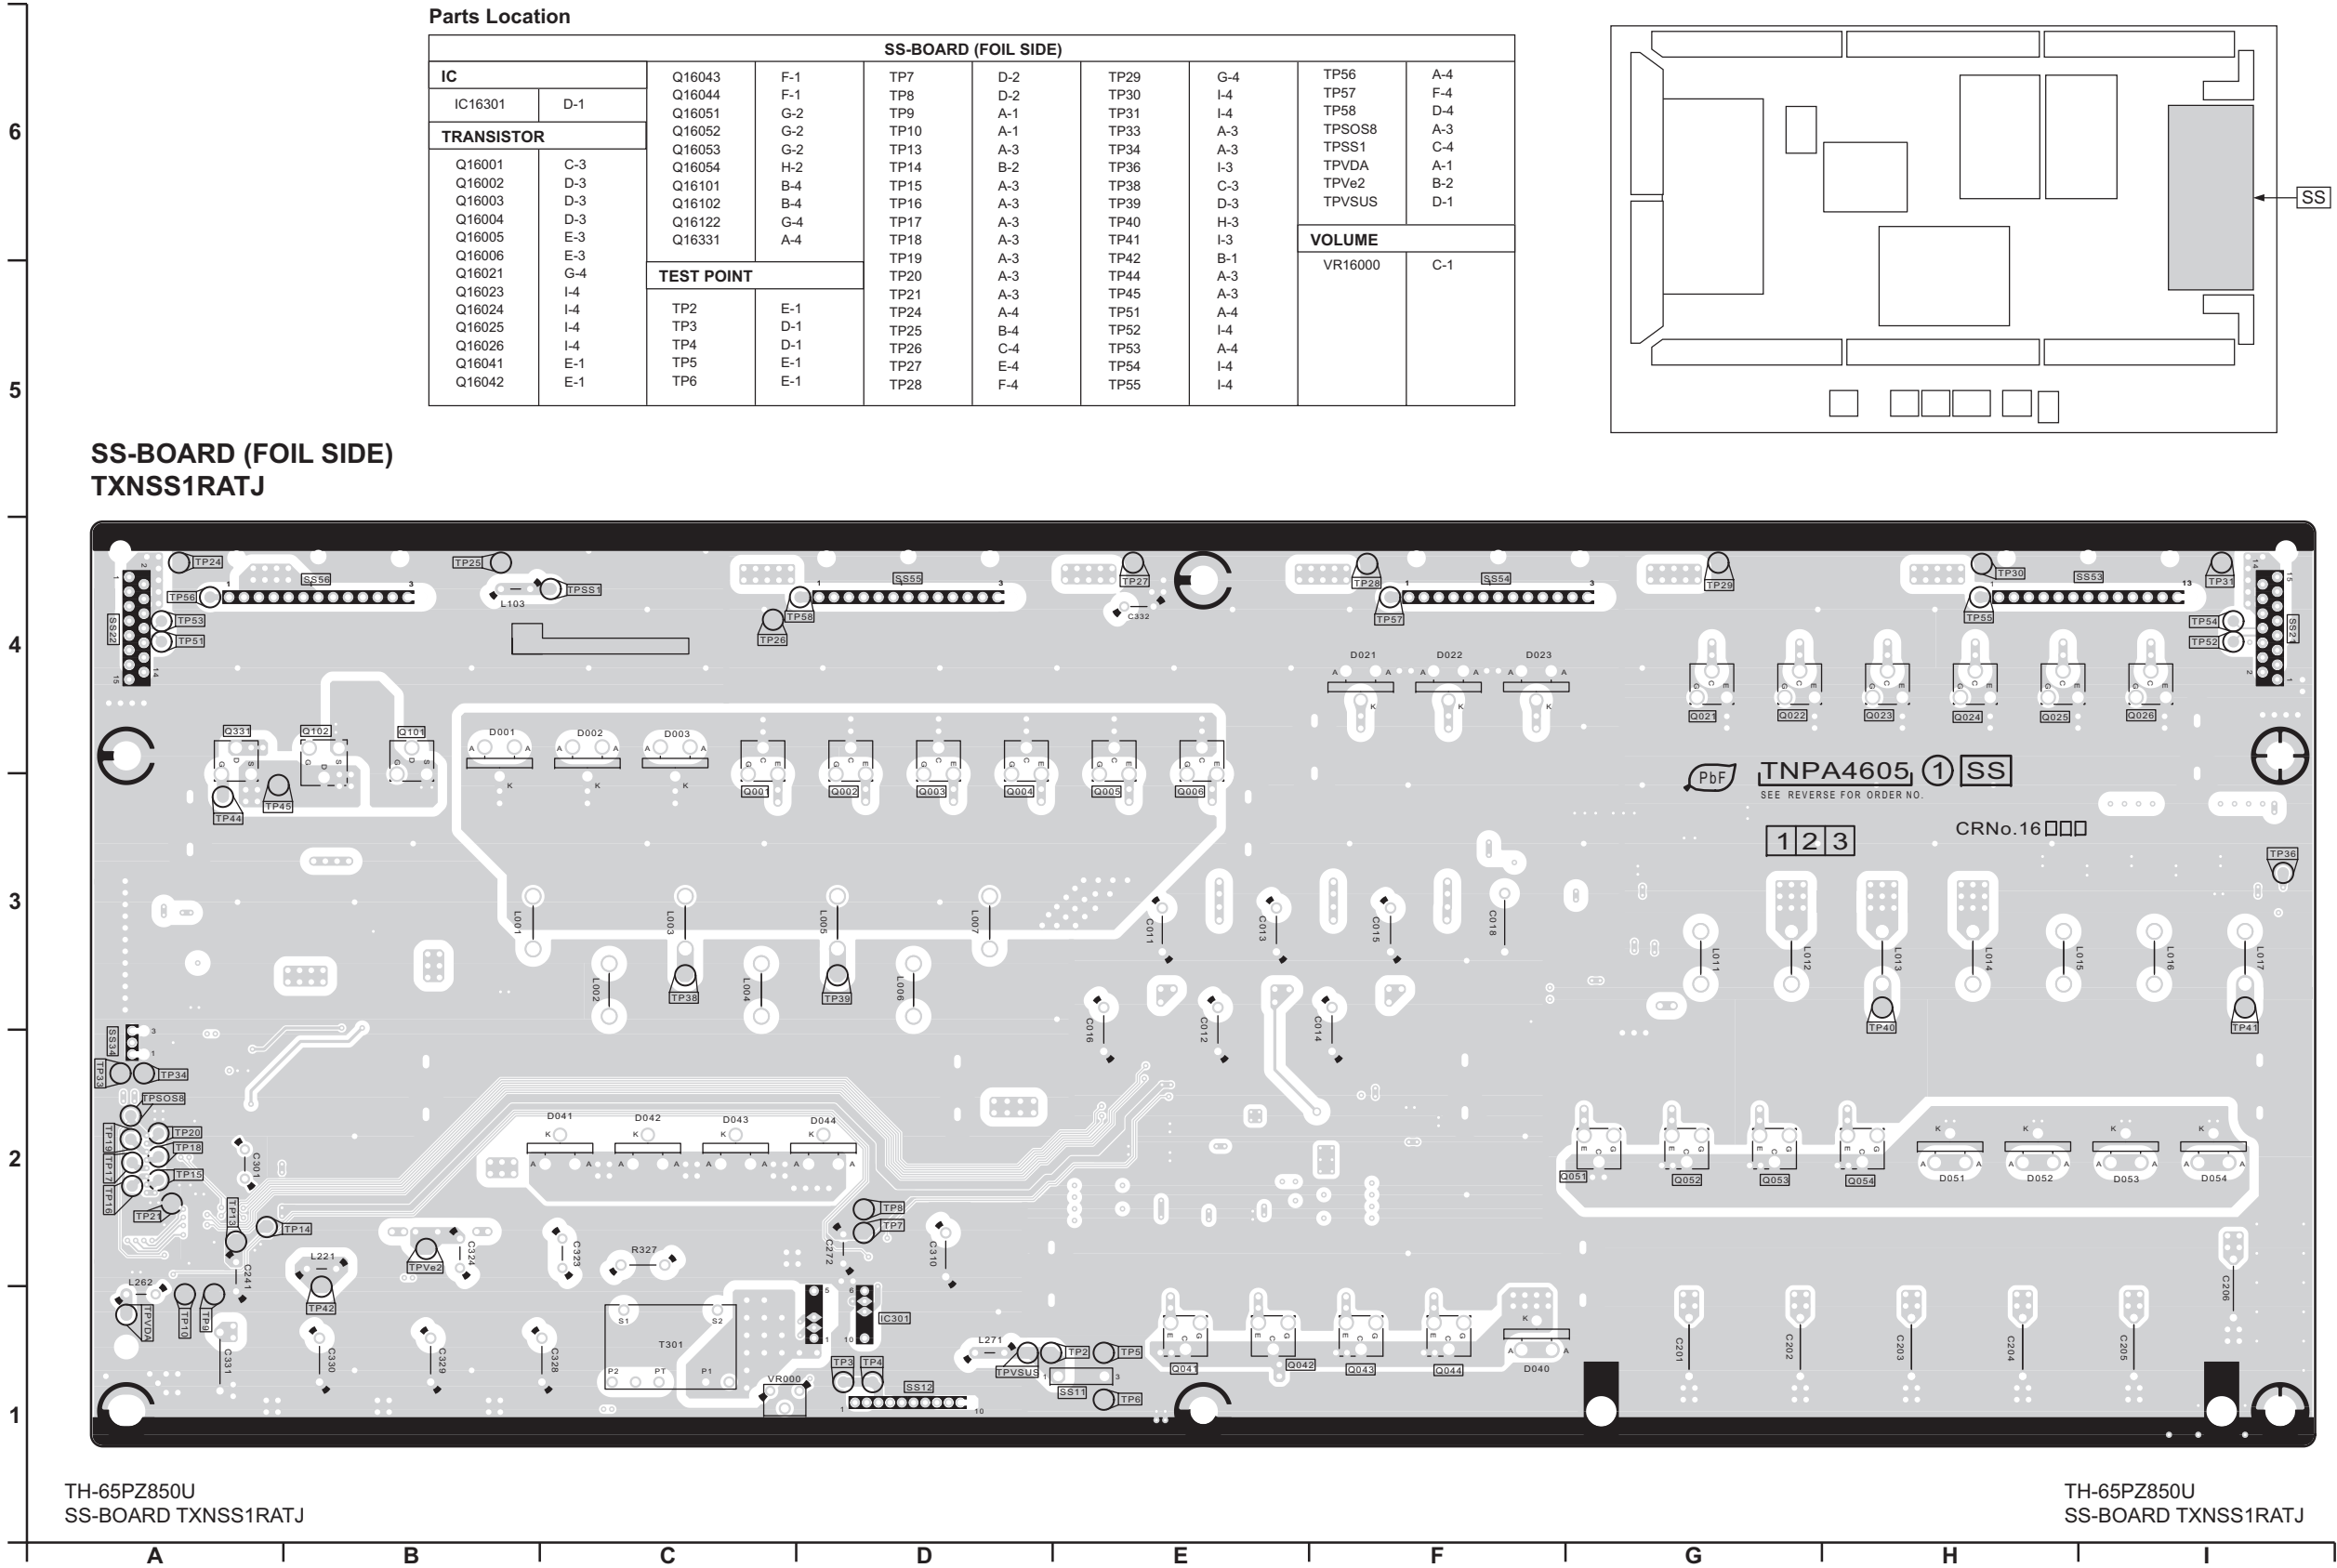


6
5
4
3
2
1
A B C D E F G H I

Parts Location

SS-BOARD (COMPONENT SIDE)									
IC		Q16005		F-4		Q16101		H-4	
IC16131	D-3	Q16006	E-4	Q16021	C-4	Q16141	H-4	TPSOS8	I-1
IC16151	E-2	Q16022	C-4	Q16023	B-4	Q16161	D-3	TPSS1	H-4
IC16241	I-2	Q16023	B-4	Q16024	B-4	Q16191	I-3	TPVDA	I-1
IC16251	D-2	Q16024	B-4	Q16025	B-4	Q16251	D-2	TPVe	H-2
IC16301	G-1	Q16026	A-4	Q16301	I-2	Q16280	A-3	TPVSUS	F-1
IC16302	H-1	Q16041	E-1	Q16302	I-2	Q16301	I-2	VOLUME	
IC16303	I-2	Q16042	E-1	Q16304	I-2	Q16302	I-2	VR16000	G-1
PHOTO COUPLER		Q16043	D-1	Q16321	H-2	Q16304	I-2		
PC16191	I-3	Q16044	D-1	Q16331	I-3	Q16321	H-2		
TRANSISTOR		Q16051	D-2	Q16339	I-3	Q16331	I-3		
Q16001	G-4	Q16052	C-2	Q16398	D-2	Q16339	D-2		
Q16002	G-4	Q16053	C-2	Q16399	F-2	Q16398	D-2		
Q16003	F-4	Q16054	C-2			Q16399	F-2		
Q16004	F-4	Q16055	F-2						
		Q16056	E-2						

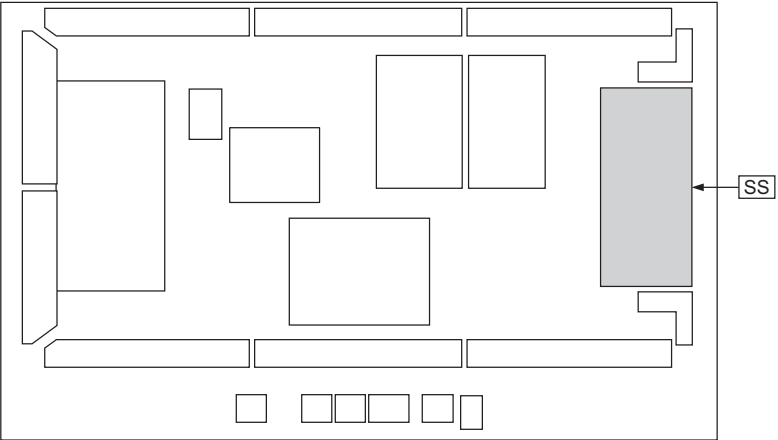


SS-BOARD (COMPONENT SIDE)
TXNSS1RATJ

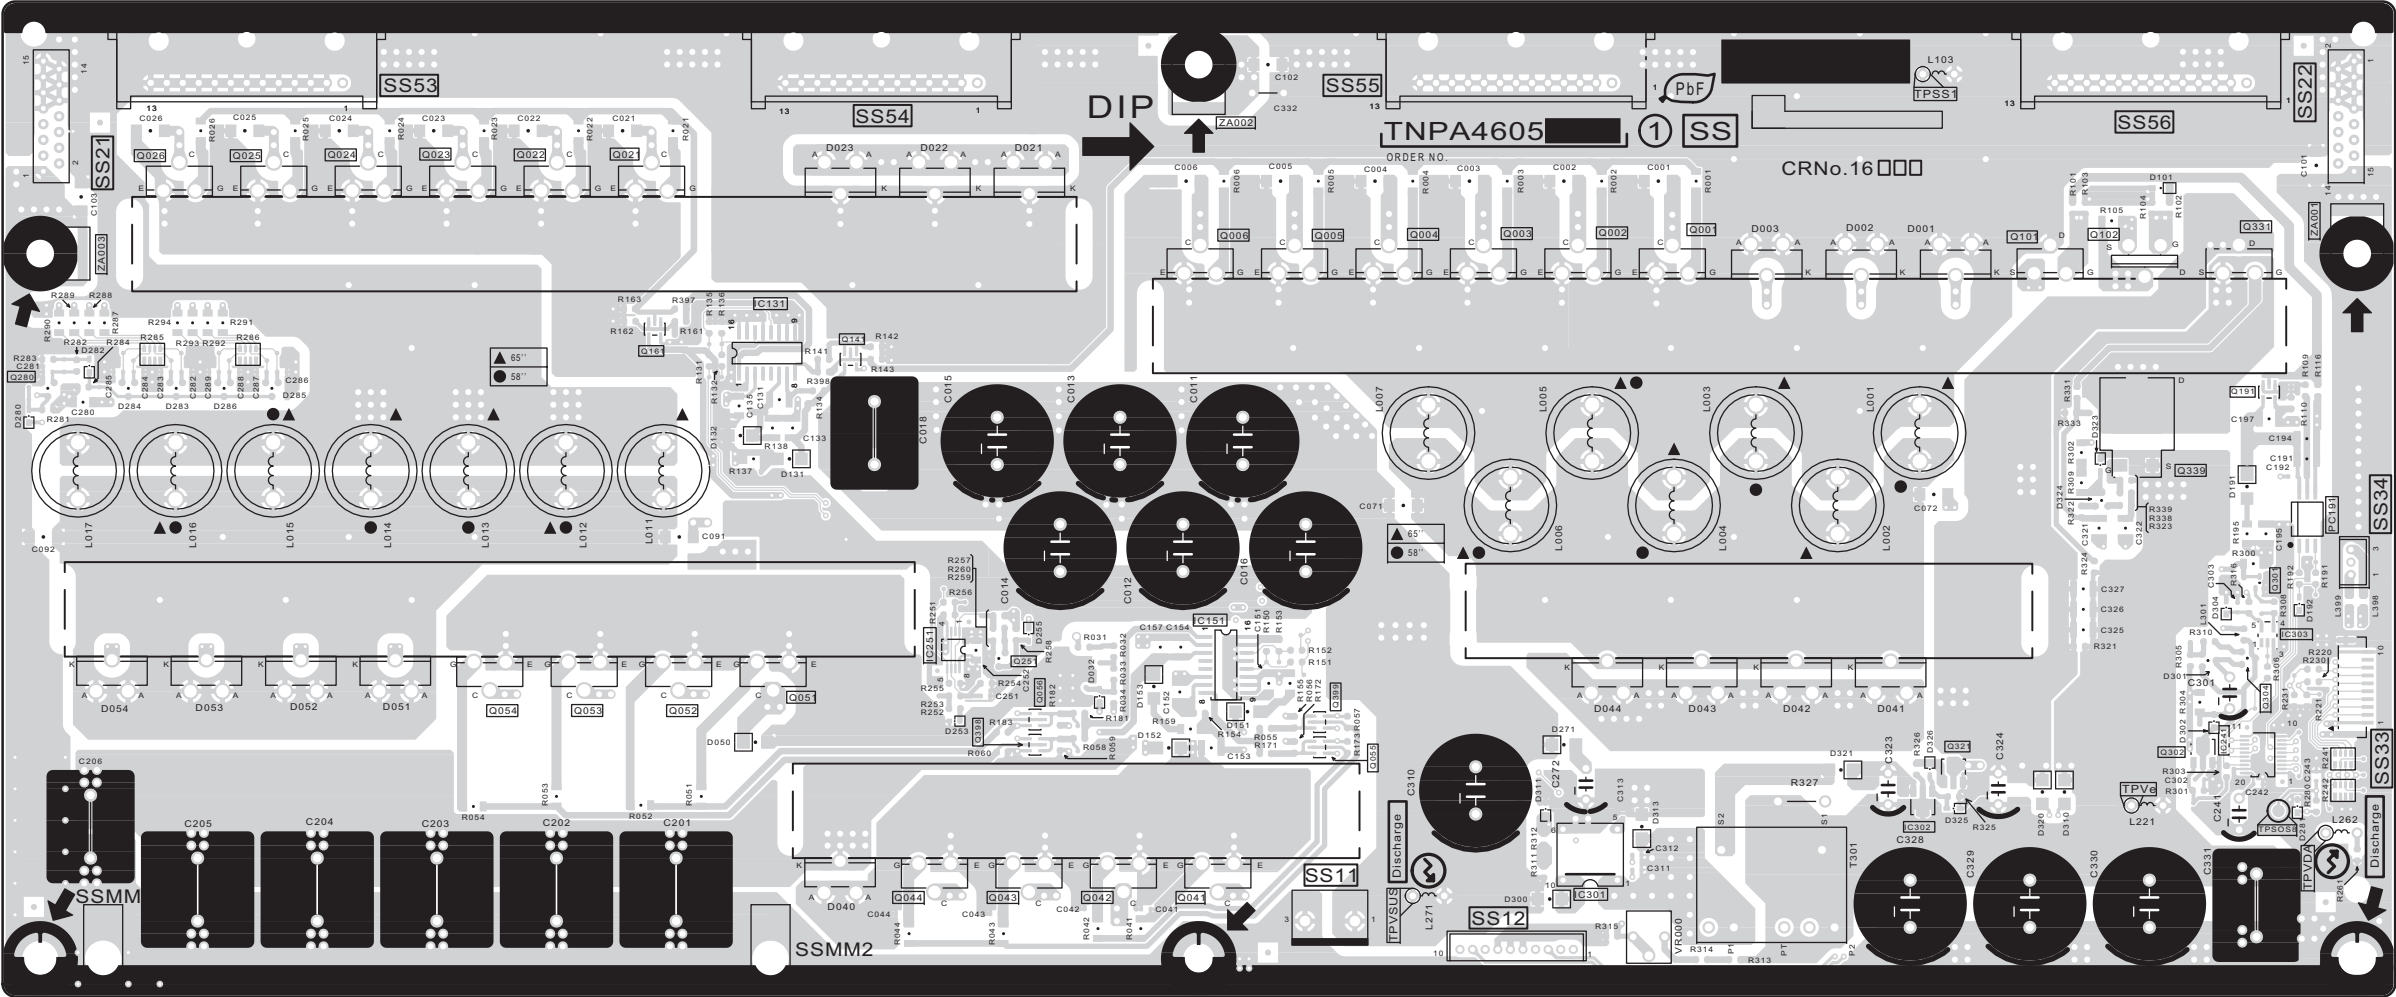


TH-65PZ850U
SS-BOARD TXNSS1RATJ

TH-65PZ850U
SS-BOARD TXNSS1RATJ

12.17. SS2-Board

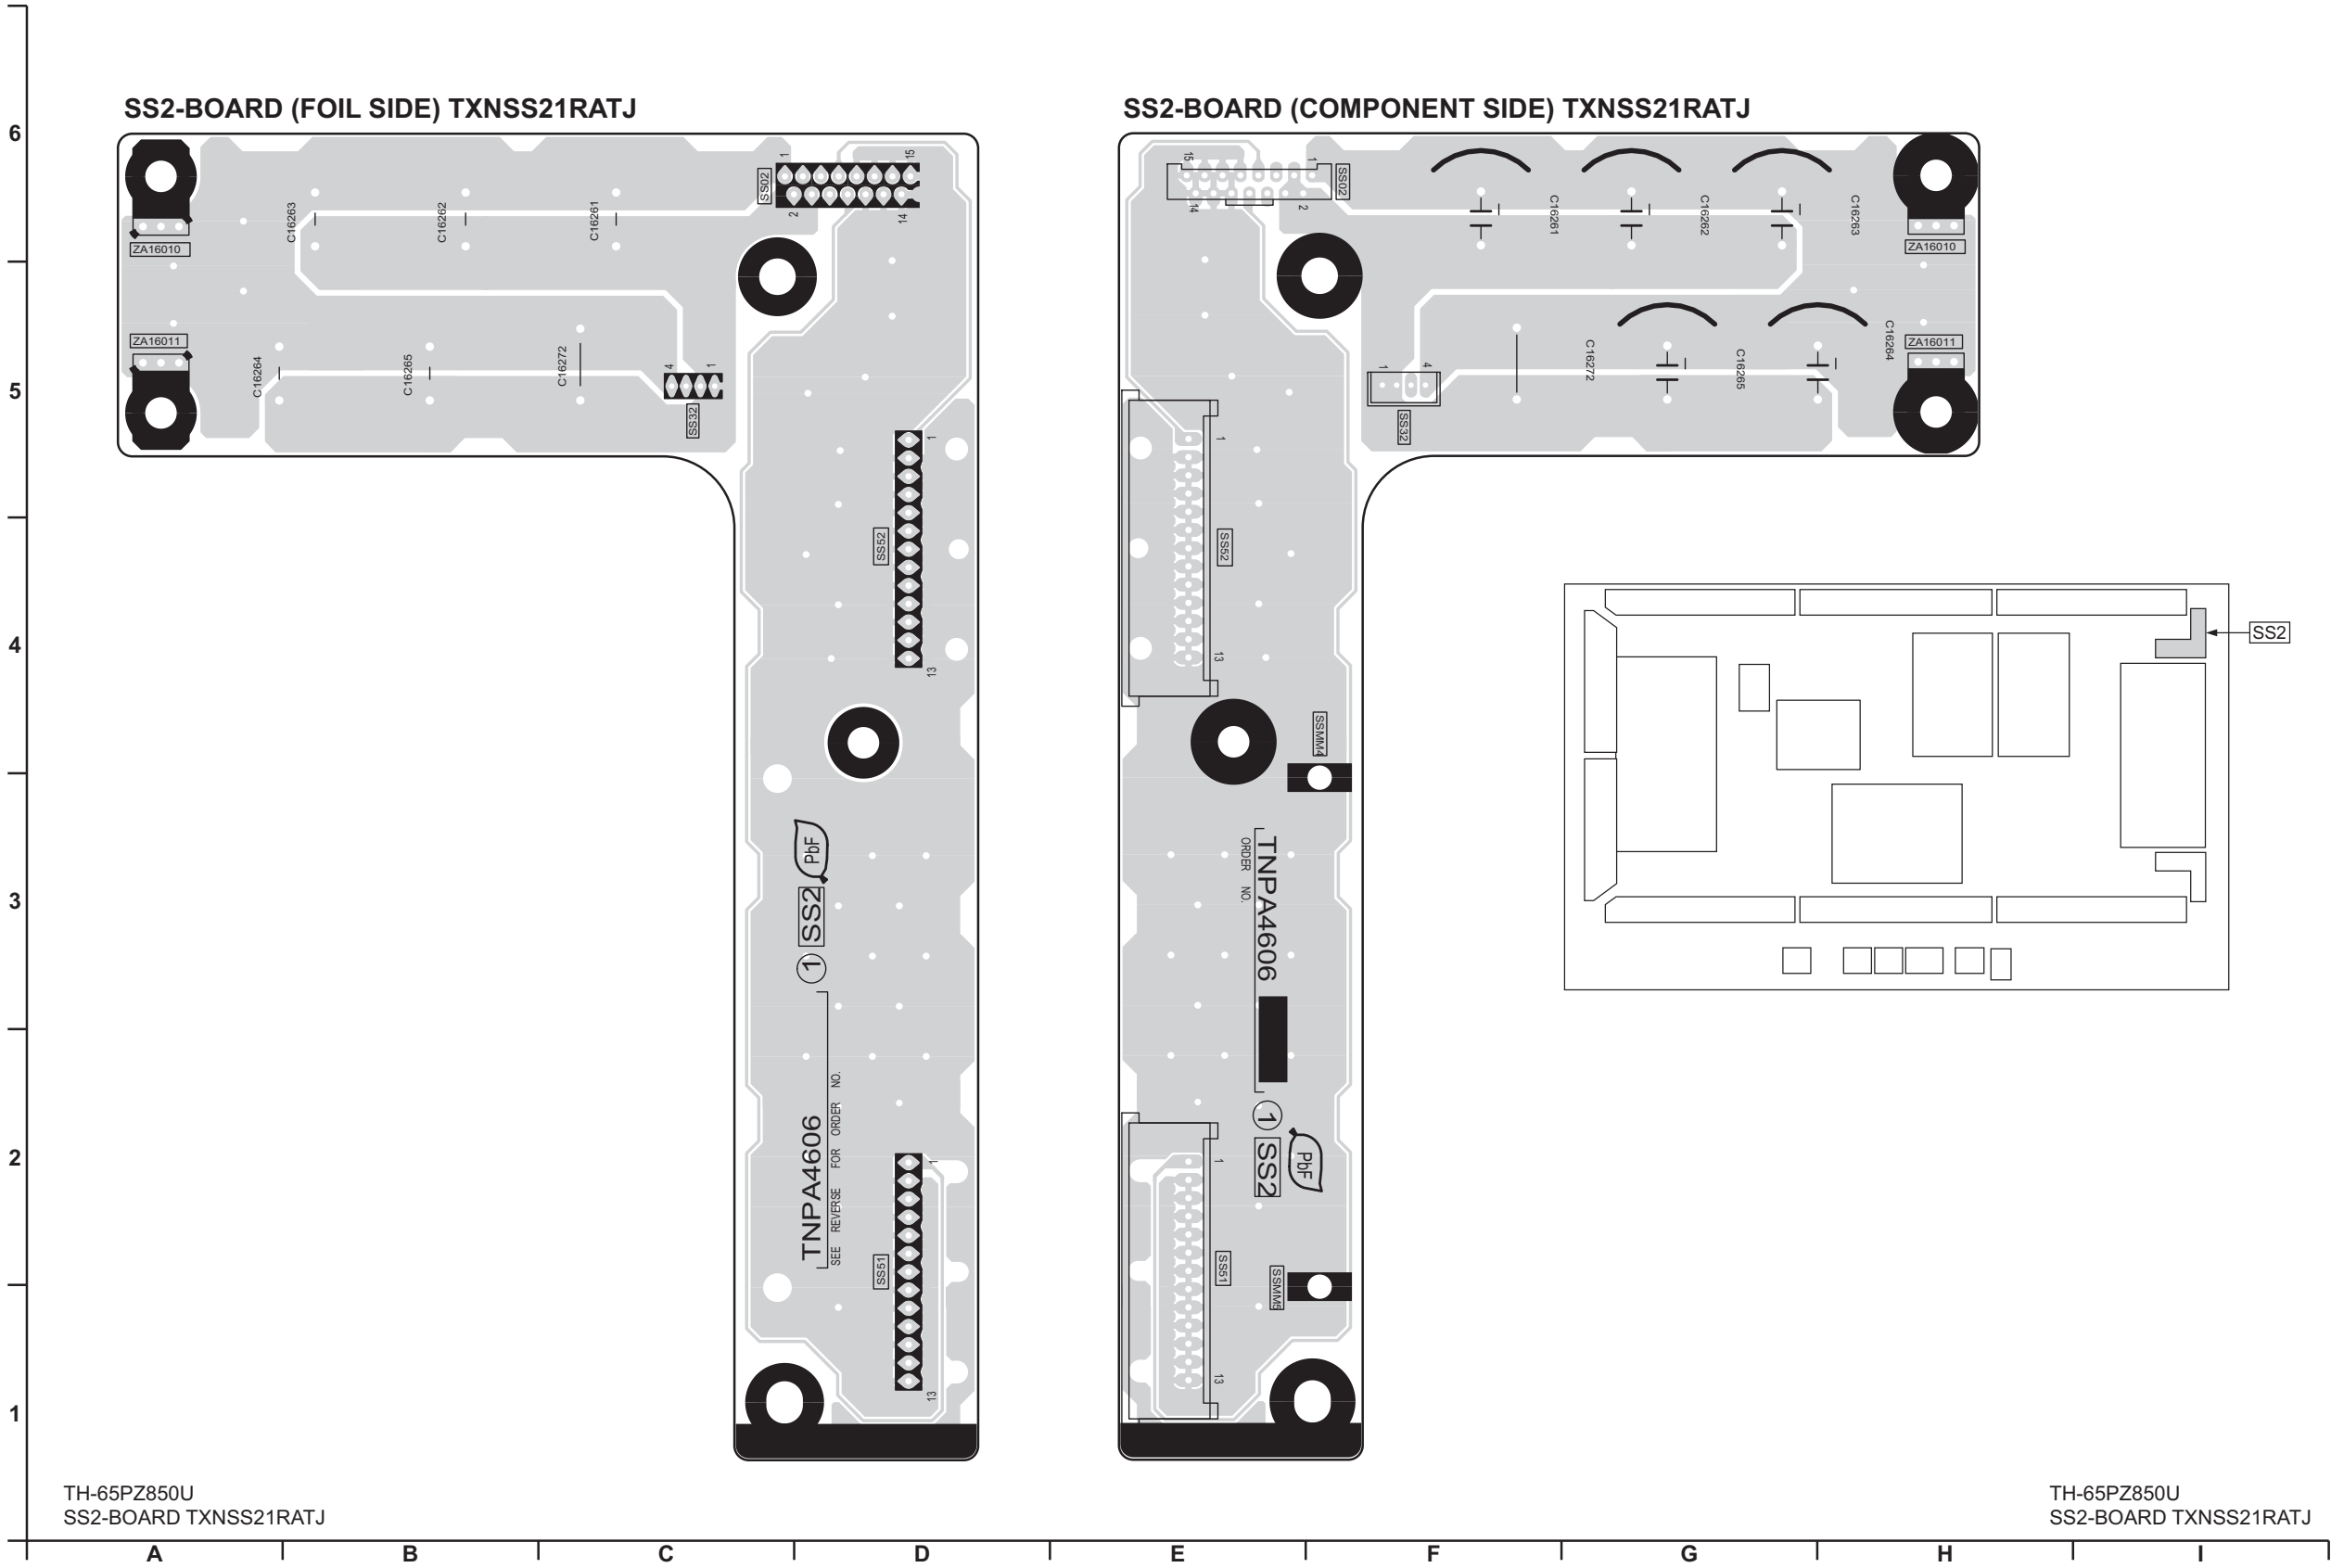


12.18. SS3-Board

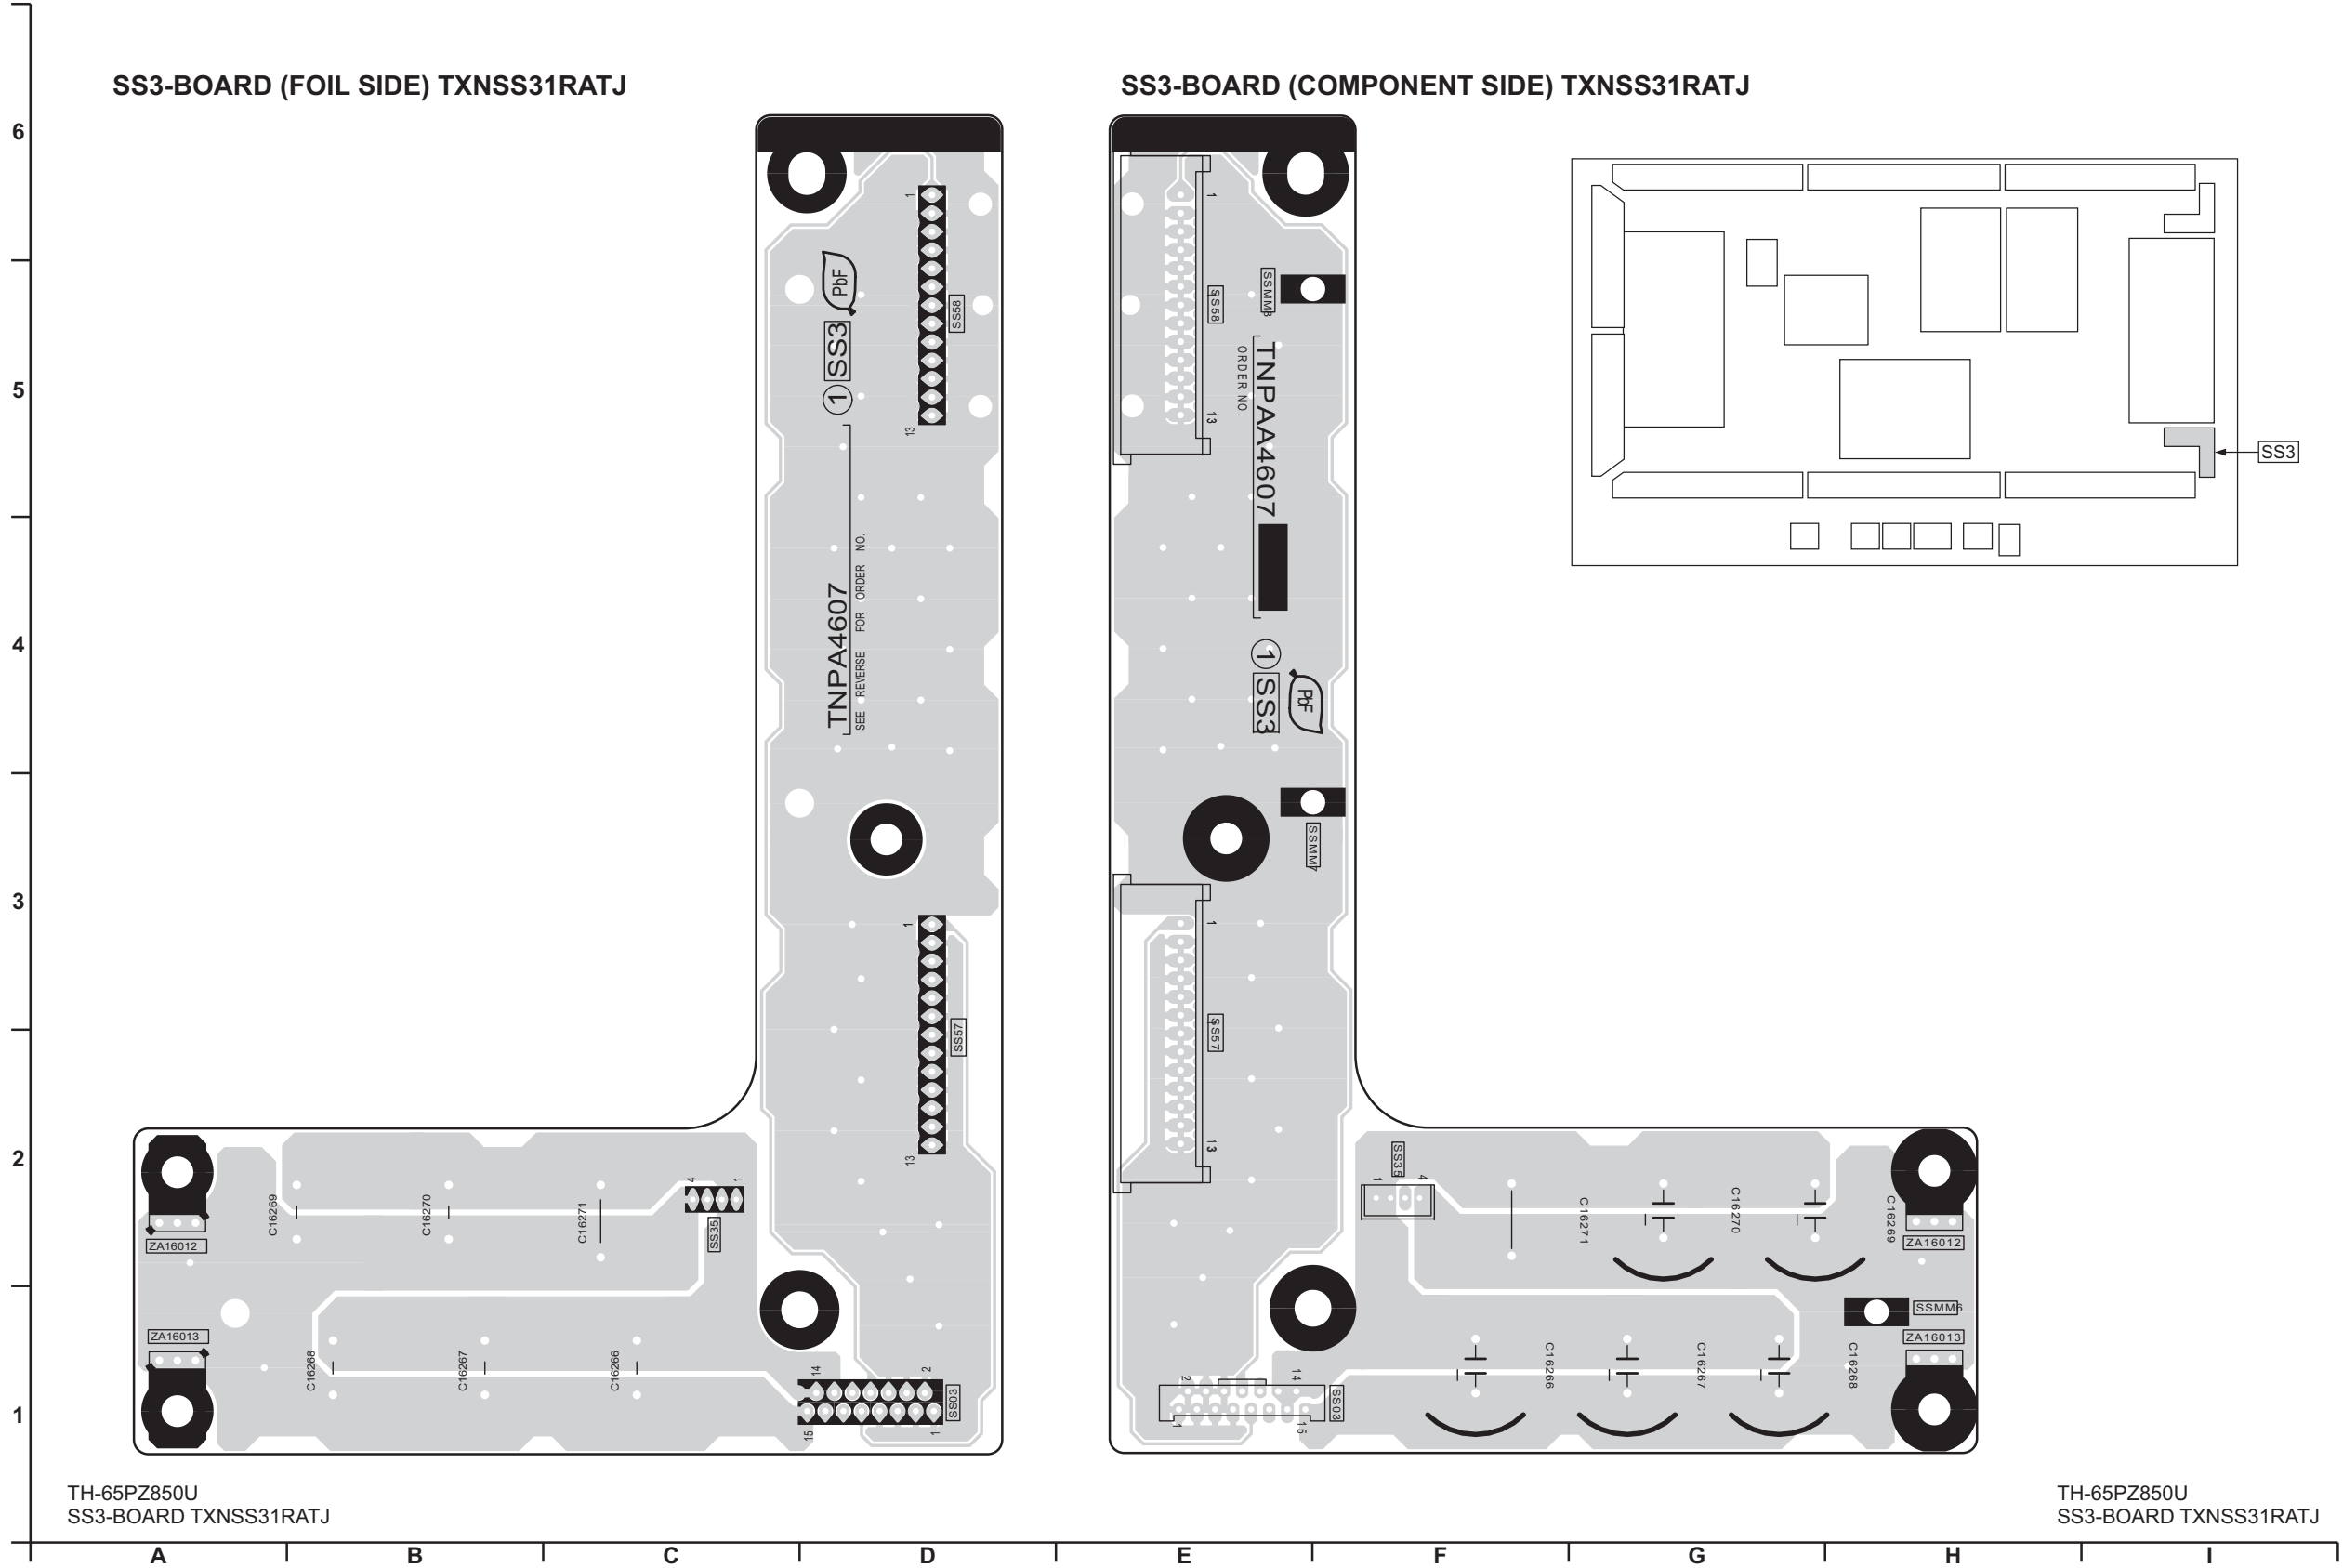


13 Exploded View and Replacement Parts List

13.1. Exploded View and Mechanical Replacement Parts List


13.1.1. Exploded View

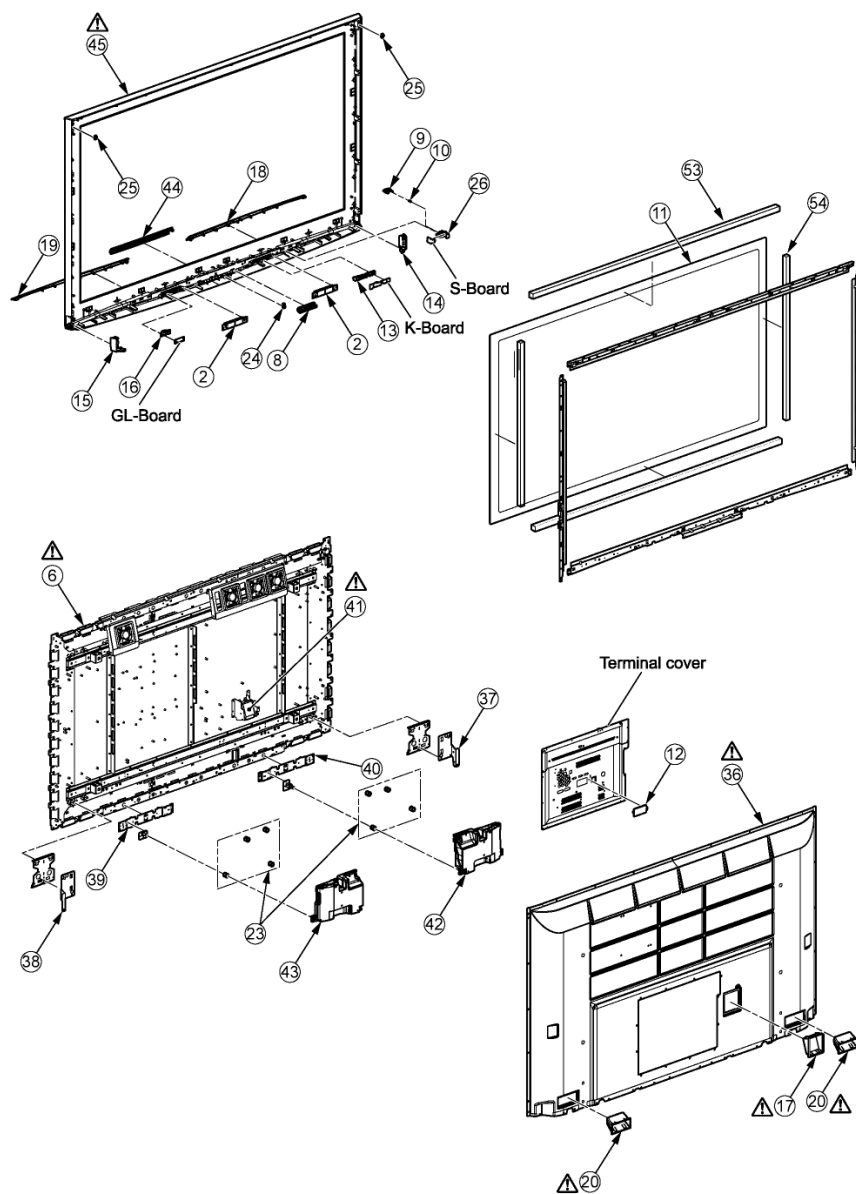


13.1.2. Fan part location

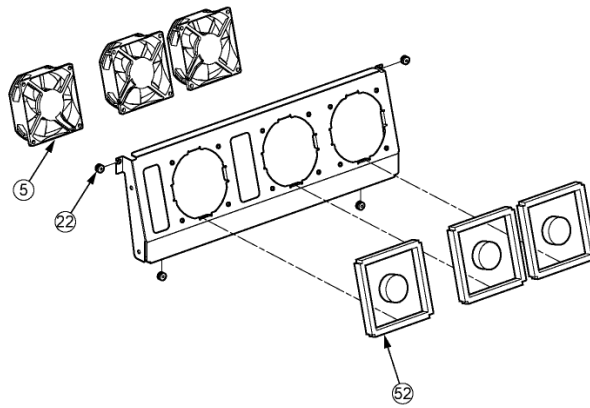

13.1.3. Flat cable relation

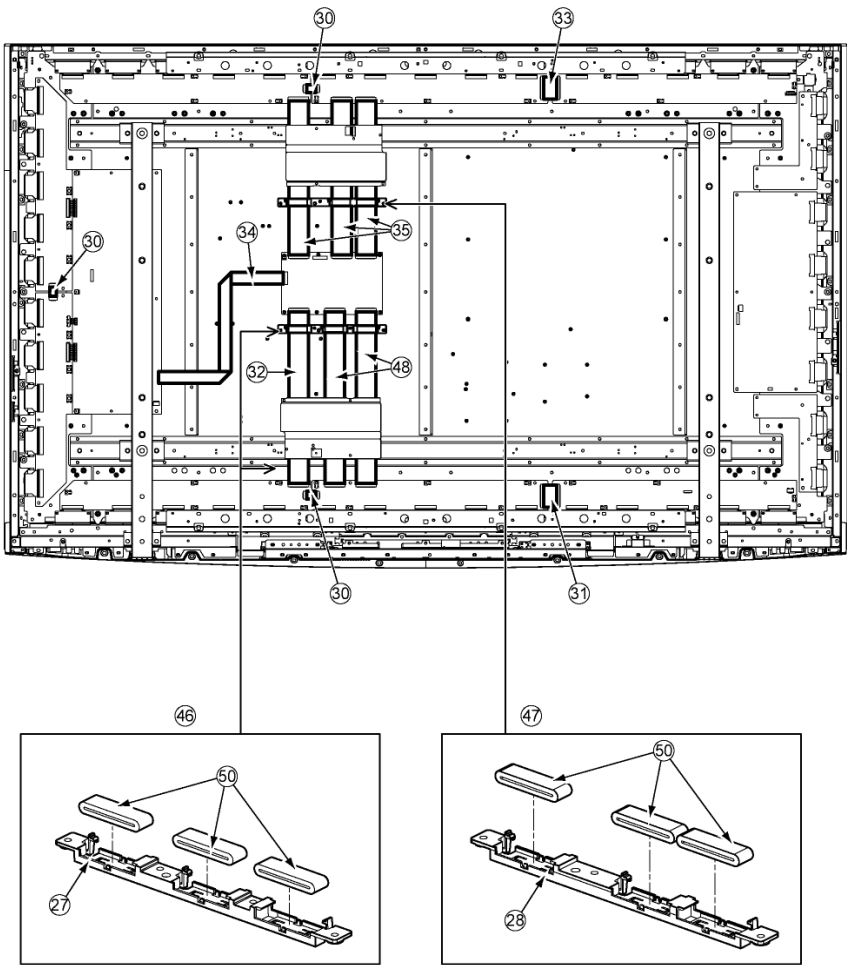

13.1.4. Accessories

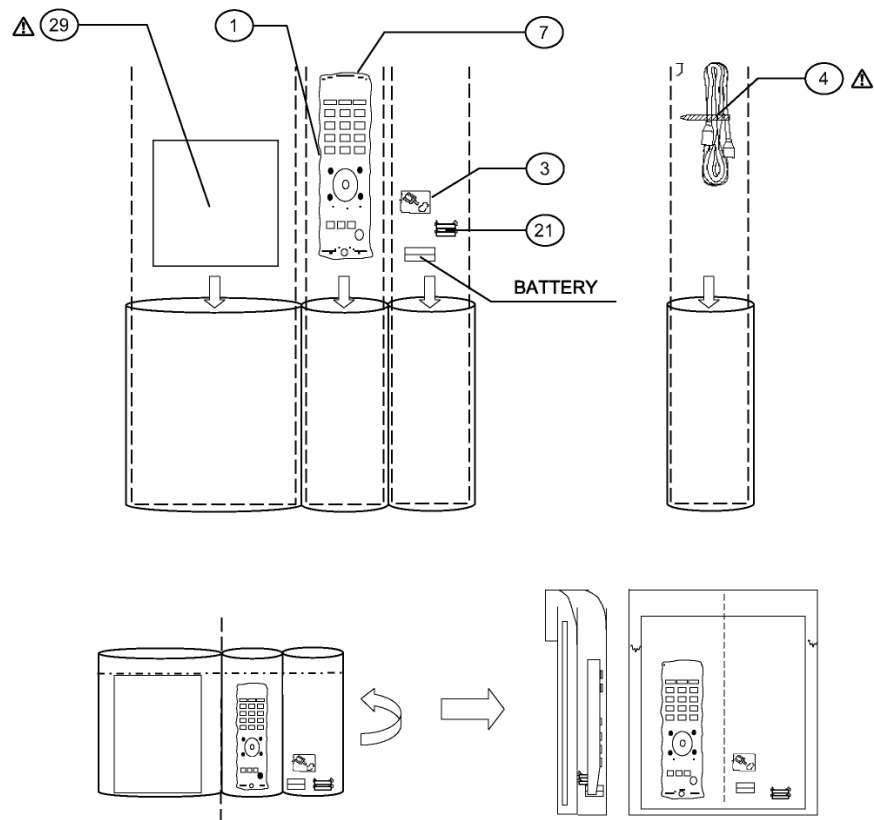

13.1.5. Mechanical Replacement Parts List

Note: All parts except parts mentioned [PAVCA] in the Remarks column are supplied by PAVC-CSG.
Parts mentioned [PAVCA] are supplied by PAVCA.

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	1	10030-0035400	BATTERY COVER	1	PAVCA
	2	EAS10D85J	SQUAWKER SPEAKER (LEFT&RRIGHT)	2	
	50	J0KD00000096	FERRITE CORE	6	
	3	K1RYYYA00016	F-TYPE (5C)	1	
	4	K2CG3YY00029	AC CORD	1	PAVCA
	5	L6FAYYYH0050	FAN (80MM-T25)	4	
	6	MD65F11A1J	PLASMA DISPLAY PANEL	1	
	7	N2QAYB000217	REMOTE CONTROL	1	PAVCA
	8	TBX2AA5001-1	SELECTION BUTTON	1	PAVCA
	9	TBX2AA5201	POWER BUTTON	1	PAVCA
	10	TES2AA0191	POWER BUTTON SPRING	1	PAVCA
		THEJ016J	SCREW (AC INRET:2)	2	
		THEL0429	SCREW	20	
		THEL052Z	SCREW (BC TOP:4)	7	
		THTD013N	SCREW	8	
		THTF011N	SCREW	104	
	11	TKGA5467S	FRONT GLASS	1	PAVCA
	12	TKK2AA7701	ADJUSTMENT COVER	1	PAVCA
	13	TKK2AA8601	LED IR PANEL	1	PAVCA
	14	TKKL5453	CORNER PROTECTION LEFT	1	PAVCA
	15	TKKL5454	CORNER PROTECTION RIGHT	1	PAVCA
	16	TKP2AA9101	SD PANEL LIGHT	1	PAVCA
	17	TKPB13101	INLET COVER	1	
	18	TKPB32602	UNDER COVER LEFT	1	PAVCA
	19	TKPB32702	UNDER COVER RIGHT	1	PAVCA
	20	TKRA52502A	REAR COVER HANDLE	2	
	52	TMKG669	FAN SPONGE	4	
	53	TMKG839	SPONGE (TKG/UPPER/BOTTOM)	2	
	54	TMKG840	SPONGE (TKG/LEFT/RIGHT)	2	
		TMM15414-2	CLAMPER	2	
		TMM16473-1	CLAMPER	1	
		TMM7464-2	CLAMPER	3	
		TMM7468-1	CLAMPER	1	
		TMME260	CLAMPER	2	
		TMME287	CLAMPER	9	
	21	TMME289	CLAMPER	2	
		TMME292	CLAMPER	16	
		TMME293	CLAMPER	2	
		TMME305	CLAMPER	2	
	22	TMMJ068	RUBBER (FAN)	8	
	23	TMMJ070	SPEAKER RUBBER	8	
	24	TMMX226	DOOR SPRING	1	
	25	TMMX234	REAR COVER HOOK	2	

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	26	TMW2AA002	POWER BUTTON BRACKET	1	PAVCA
	27	TMXX033	CORE HOLDER	1	
		TMXX045	AC CORD HOLDER	1	
	28	TMXX058	CORE HOLDER	1	PAVCA
		TPD169487	JOINT	4	
		TPDX0016	JOINT	4	
	29	TQB2AA0786	INSTRUCTION BOOK (ENG/FRE/SPA)	1	PAVCA
	30	TSXL519	CABLE (C10-C20/C50-C60/SU11-SD11)	3	
	31	TSXL555	CABLE (C41-C51)	1	
	32	TSXL566	CABLE (D31-C61)	1	
	33	TSXL661	CABLE (C23-C33)	1	
	34	TSXL684	CABLE (D20-SC20)	1	PAVCA
	35	TSXL685	CABLE (D34-C11/D35-C21/D36-C22)	3	PAVCA
	36	TXFKU26TSE	REAR COVER	1	PAVCA
	37	TUXX533	SUPPORT METAL (LEFT)	1	PAVCA
	38	TUXX534	SUPPORT METAL (RIGHT)	1	PAVCA
	39	TUXX543	WOOFER HOLDER (RIGHT)	1	PAVCA
	40	TUXX558	WOOFER HOLDER (LEFT)	1	PAVCA
		TW-4BS-2L	LUG TERMINAL	1	
	41	TXALK01RATU	AC INLET ASSY	1	PAVCA
	42	TXFEAB01TSE	SPEAKER BOX (WOOFER/LEFT)	1	PAVCA
	43	TXFEAB02TSE	SPEAKER BOX (WOOFER/RIGHT)	1	PAVCA
	44	TXFKP01RBTU	DOOR ASSY	1	PAVCA
	45	TXFKY01RATU	CABINET ASSY	1	PAVCA
	46	TXFMX01EVTJ	CORE ASSY	1	
		TXFPE01RLTU	CLEANING CLOTH ASSY	1	
	48	TXFSX01DRTU	CABLE ASSY (D32-C52/D33-C53)	2	
		TXJA10RATU	SPEAKER LEAD (A10-SQL/WL)	1	PAVCA
		TXJA12RATU	SPEAKER LEAD (A12-SQR/WR)	1	PAVCA
		XSB3+6FJ	SCREW	3	
		XTB3+10GFJ	SCREW	5	
		XTB4+12GFJ	SCREW	52	
		XTB4+12GFJK	SCREW	26	
		XTW3+10TFJ	SCREW	1	
		XTW4+25DFJ	SCREW	22	
		XTWT4+Z15DFJ	SCREW (SP BOX)	8	
		XYN3+F8FJ	SCREW	46	
		XYN3+J12FJ	SCREW	72	
		XYN4+E8FJ	SCREW	1	
		XYN4+F10FJ	SCREW	76	
		XYN4+F14FJ	SCREW	6	
		XYN8+F20FJK	SCREW	4	

13.2. Electrical Replacement Parts List

13.2.1. Replacement Parts List Notes

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.
After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention.
After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor

Example:

ERD25TJ104 C 100KOHM, J, 1/4W
 Type Allowance

2. Capacitor

Example:

ECKF1H103ZF C 0.01UF, Z, 50V
 Type Allowance

Type	Allowance
C : Carbon	F : $\pm 1\%$
F : Fuse	G : $\pm 2\%$
M : Metal Oxide Metal Film	J : $\pm 5\%$
S : Solid	K : $\pm 10\%$
W : Wire Wound	M : $\pm 20\%$

Type	Allowance
C : Ceramic	C : $\pm 0.25\text{pF}$
E : Electrolytic	D : $\pm 0.5\text{pF}$
P : Polyester	F : $\pm 1\text{pF}$
Polypropylene	G : $\pm 3\text{pF}$
T : Tantalum	J : $\pm 5\text{pF}$
	K : $\pm 10\text{pF}$
	L : $\pm 15\text{pF}$
	M : $\pm 20\text{pF}$
	P : +100%, -0%
	Z : +80%, -20%

13.2.2. Electrical Replacement Parts List

Note: All parts except parts mentioned [PAVCA] in the Remarks column are supplied by PAVC-CSG.
Parts mentioned [PAVCA] are supplied by PAVCA.

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	A1	K1KA09A00220	9P CONNECTOR	1	
	A3	K1KA14A00248	14P CONNECTOR	1	
	A5	K1KB31A0140	31P CONNECTOR	1	
	A6	K1KA12A00194	12P CONNECTOR	1	
	A7	K1KA09A00193	9P CONNECTOR	1	
	A9	K1KA06A00508	6P CONNECTOR	1	
	A10	K1KA05A00190	5P CONNECTOR	1	
	A11	K1KA30A00009	30P CONNECTOR	1	
	A12	K1KA04A00190	4P CONNECTOR	1	
	A17	K1KA20A00009	20P CONNECTOR	1	
	A18	K1KA11A00715	11P CONNECTOR	1	
	A30	K1KA05A00193	5P CONNECTOR	1	
	A51	K1KA11A00178	11P CONNECTOR	1	
	AMM1	TMME292	CLAMPER	1	
	AMM3	TMME292	CLAMPER	1	
	AMM4	TMME292	CLAMPER	1	
	AMM5	TMME292	CLAMPER	1	
	AMM6	TMME292	CLAMPER	1	
	C858	ECJ2VB1E104K	C 0.1UF, K, 25V	1	
	C859	ECJ2VB1E104K	C 0.1UF, K, 25V	1	
	C860	ECA1EHG471	E 470UF, 25V	1	
	C861	ECJ2VB1E104K	C 0.1UF, K, 25V	1	
	C862	ECJ2VB1E104K	C 0.1UF, K, 25V	1	
	C869	ECA1EHG471	E 470UF, 25V	1	
	C1102	F1J1A106A043	C 0.010UF, K, 10V	1	
	C1103	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1104	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1106	F1G1H270A731	C 27UF, 50V	1	
	C1107	F1G1H220A731	C 22UF, 50V	1	
	C1108	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1109	F1H1A1050032	C 10UF, 50V	1	
	C1111	F1H1A1050032	C 10UF, 50V	1	
	C1112	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1114	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1117	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1122	F1G1C103A116	C 0.010UF, K, 16V	1	
	C1123	F1H1A1050032	C 10UF, 50V	1	
	C2023	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2048	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2049	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2050	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2052	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2053	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2054	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2055	F1G1H120A731	C 12UF, 50V	1	
	C2056	F1G1H150A731	C 15UF, 50V	1	
	C2058	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2059	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2060	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2061	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2062	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2063	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2064	F1J1C1050030	C 1UF, Z, 16V	1	
	C2065	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C2100	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2101	F1J1A106A043	C 0.010UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2105	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2106	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2107	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2108	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2111	F1H1A225A051	C 22UF, 50V	1	
	C2116	F1G1H471A730	C 470UF, 50V	1	
	C2118	F1H1A1050032	C 10UF, 50V	1	
	C2126	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2180	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2181	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2186	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2187	F1H1A225A051	C 22UF, 50V	1	
	C2188	F1G1H471A730	C 470UF, 50V	1	
	C2189	F1H1A1050032	C 10UF, 50V	1	
	C2190	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2192	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2195	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2196	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2197	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2198	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2213	F1G1H102A730	C 1000UF, 50V	1	
	C2216	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2244	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2245	F1G1H102A730	C 1000UF, 50V	1	
	C2251	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2263	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2264	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2301	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2302	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2303	F1J1E105A171	C 1 UF 25V	1	
	C2304	F1J1E105A171	C 1 UF 25V	1	
	C2305	F1J1E105A171	C 1 UF 25V	1	
	C2306	F1J1E105A171	C 1 UF 25V	1	
	C2307	F1J1E105A171	C 1 UF 25V	1	
	C2308	F1J1E105A171	C 1 UF 25V	1	
	C2309	F1J1E105A171	C 1 UF 25V	1	
	C2310	F1J1E105A171	C 1 UF 25V	1	
	C2312	F1H1A1050032	C 10UF, 50V	1	
	C2313	F1H1A1050032	C 10UF, 50V	1	
	C2317	F1H1E104A129	C 0.1UF, 25V	1	
	C2318	F1H1E104A129	C 0.1UF, 25V	1	
	C2319	F1H1E104A129	C 0.1UF, 25V	1	
	C2321	F1H1E104A129	C 0.1UF, 25V	1	
	C2323	F1H1E104A129	C 0.1UF, 25V	1	
	C2324	F1H1E104A129	C 0.1UF, 25V	1	
	C2333	F1J1E3340003	C 0.33UF, Z, 25V	1	
	C2334	F1J1E3340003	C 0.33UF, Z, 25V	1	
	C2335	F1J1E3340003	C 0.33UF, Z, 25V	1	
	C2336	F1J1E3340003	C 0.33UF, Z, 25V	1	
	C2337	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2338	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2339	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2340	F1H1H223A970	C 0.22UF, K, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2341	F1J1E3340003	C 0.33UF, Z, 25V	1	
	C2342	F1J1E3340003	C 0.33UF, Z, 25V	1	
	C2343	F1J1E3340003	C 0.33UF, Z, 25V	1	
	C2344	F1J1E3340003	C 0.33UF, Z, 25V	1	
	C2345	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2346	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2347	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2348	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2353	F1H1E104A129	C 0.1UF, 25V	1	
	C2354	F1H1E104A129	C 0.1UF, 25V	1	
	C2356	F1H1E104A129	C 0.1UF, 25V	1	
	C2358	F1H1E104A129	C 0.1UF, 25V	1	
	C2359	F1H1E104A129	C 0.1UF, 25V	1	
	C2360	F1H1E104A129	C 0.1UF, 25V	1	
	C2361	EEFEG1E471P	E 470UF, 25V	1	
	C2375	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2376	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2377	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2378	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2379	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2380	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2381	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2382	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2383	F1G1H102A730	C 1000UF, 50V	1	
	C2384	F1G1H102A730	C 1000UF, 50V	1	
	C2385	F1G1H102A730	C 1000UF, 50V	1	
	C2386	F1G1H102A730	C 1000UF, 50V	1	
	C2387	F1G1H102A730	C 1000UF, 50V	1	
	C2388	F1G1H102A730	C 1000UF, 50V	1	
	C2389	F1G1H102A730	C 1000UF, 50V	1	
	C2390	F1G1H102A730	C 1000UF, 50V	1	
	C2512	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
	C2515	F1H1H103A970	C 0.001UF, K, 50V	1	
	C2521	F1H1H103A970	C 0.001UF, K, 50V	1	
	C2522	F1H1C104A143	C 0.1UF, K, 16V	1	
	C3001	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3006	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3007	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3008	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3010	F1G1C103A116	C 0.010UF, K, 16V	1	
	C3011	F1G1C103A116	C 0.010UF, K, 16V	1	
	C3013	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3015	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3016	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3017	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3019	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3020	F2G1C220A022	E 22UF, 16V	1	
	C3021	F2G1A221A149	E 220UF, 10V	1	
	C3022	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3023	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3024	F1H1A1050032	C 10UF, 50V	1	
	C3025	F1H1A1050032	C 10UF, 50V	1	
	C3026	F1H1A1050032	C 10UF, 50V	1	
	C3027	F1H1A1050032	C 10UF, 50V	1	
	C3028	F1H1A1050032	C 10UF, 50V	1	
	C3029	F1H1A1050032	C 10UF, 50V	1	
	C3030	F1H1A1050032	C 10UF, 50V	1	
	C3031	F1H1A1050032	C 10UF, 50V	1	
	C3032	F1H1A1050032	C 10UF, 50V	1	
	C3033	F1H1A1050032	C 10UF, 50V	1	
	C3034	F1H1A1050032	C 10UF, 50V	1	
	C3035	F1H1A1050032	C 10UF, 50V	1	
	C3042	F1J1A106A043	C 0.010UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C3043	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3044	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3045	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3046	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3047	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3049	F2G1A101A019	E 100UF, 10V	1	
	C3050	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3051	F1H1A1050032	C 10UF, 50V	1	
	C3052	F1H1A1050032	C 10UF, 50V	1	
	C3057	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3059	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3061	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3123	F1K1A106A021	C 0.010UF, K, 6.3V	1	
	C3124	F1K1A106A021	C 0.010UF, K, 6.3V	1	
	C3157	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3530	EEFEG1E471P	E 470UF, 25V	1	
	C3532	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C3575	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3731	F2G0J470A019	E 47UF 6.3V	1	
	C3750	F1J1H102A721	C 1000UF, 50V	1	
	C3801	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3802	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3803	F1H1A1050032	C 10UF, 50V	1	
	C3804	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3806	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3807	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3808	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3809	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3810	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3811	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3812	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3813	F1J0J106A004	C 0.010UF, K, 16V	1	
	C3814	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3815	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3816	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3817	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3818	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3819	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3820	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3823	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3827	F1J1A475A039	C 4.7UF, K, 10V	1	
	C3829	F1H1A1050032	C 10UF, 50V	1	
	C4500	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4501	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4506	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4507	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4510	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4511	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4513	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4514	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4517	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4520	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4521	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4533	F1G1H680A731	C 68UF, 50V	1	
	C4534	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4535	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4547	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4548	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C4549	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4550	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4551	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4552	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4553	FIG1H102A730	C 1000UF, 50V	1	
	C4554	F2G1C470A022	E 47UF, 16V	1	
	C4555	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C4572	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4573	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4574	FIG1C103A116	C 0.010UF, K, 16V	1	
	C4575	FIH1A1050032	C 10UF, 50V	1	
	C4580	FIG1C103A116	C 0.010UF, K, 16V	1	
	C4585	FIH1A1050032	C 10UF, 50V	1	
	C4595	FIG1C103A116	C 0.010UF, K, 16V	1	
	C4596	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4598	FIH1A1050032	C 10UF, 50V	1	
	C4599	F2G0J470A019	E 47UF 6.3V	1	
	C4600	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4601	F2G0J470A019	E 47UF 6.3V	1	
	C4602	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4603	FIH1A225A051	C 22UF, 50V	1	
	C4604	FIG1H471A730	C 470UF, 50V	1	
	C4605	FIH1A1050032	C 10UF, 50V	1	
	C4606	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C4607	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C4608	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4609	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4612	FIG1C103A116	C 0.010UF, K, 16V	1	
	C4613	FIH1A1050032	C 10UF, 50V	1	
	C4614	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4616	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C4617	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C4619	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4624	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4625	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4628	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4630	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4632	FIH1A1050032	C 10UF, 50V	1	
	C4634	FIH1A1050032	C 10UF, 50V	1	
	C4636	FIH1A1050032	C 10UF, 50V	1	
	C4638	FIH1A1050032	C 10UF, 50V	1	
	C4640	FIH1A1050032	C 10UF, 50V	1	
	C4642	FIH1A1050032	C 10UF, 50V	1	
	C4643	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4644	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4645	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4646	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4800	FIG1H102A730	C 1000UF, 50V	1	
	C4801	FIG1H102A730	C 1000UF, 50V	1	
	C4802	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4803	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4804	FIG1H102A730	C 1000UF, 50V	1	
	C4805	FIG1H102A730	C 1000UF, 50V	1	
	C4807	FIG1H102A730	C 1000UF, 50V	1	
	C4808	FIG1H102A730	C 1000UF, 50V	1	
	C4809	FIG1H102A730	C 1000UF, 50V	1	
	C4810	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4811	FIG1H102A730	C 1000UF, 50V	1	
	C4812	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4813	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4814	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4815	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4816	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4817	FIG1H102A730	C 1000UF, 50V	1	
	C4818	FIG1H102A730	C 1000UF, 50V	1	
	C4819	FIG1H102A730	C 1000UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C4820	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4821	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4822	FIG1H102A730	C 1000UF, 50V	1	
	C4823	FIG1H102A730	C 1000UF, 50V	1	
	C4824	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4825	FIG1H102A730	C 1000UF, 50V	1	
	C4826	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4827	FIG1H102A730	C 1000UF, 50V	1	
	C4828	FIG1H102A730	C 1000UF, 50V	1	
	C4829	FIG1H102A730	C 1000UF, 50V	1	
	C4830	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4831	FIG1H102A730	C 1000UF, 50V	1	
	C4832	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4833	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4834	FIG1H102A730	C 1000UF, 50V	1	
	C4835	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4836	FIH1H103A970	C 0.001UF, K, 50V	1	
	C4837	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4838	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4839	FIH1H103A970	C 0.001UF, K, 50V	1	
	C4840	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4841	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4842	FIH1H103A970	C 0.001UF, K, 50V	1	
	C4843	FIG1H102A730	C 1000UF, 50V	1	
	C4844	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4845	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4846	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4847	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4848	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4849	FIH1A1050032	C 10UF, 50V	1	
	C4850	FIH1A1050032	C 10UF, 50V	1	
	C4854	FIK1A106A021	C 0.010UF, K, 6.3V	1	
	C4856	FIH1A225A051	C 22UF, 50V	1	
	C4857	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4858	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4859	FIG1H181A731	C 180UF, 50V	1	
	C4860	F2G1V220A020	E 22UF, 35V	1	
	C4861	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4863	FIJ1H474A757	C 0.47UF, 50V	1	
	C4864	FIJ1H474A757	C 0.47UF, 50V	1	
	C4865	FIG1H102A730	C 1000UF, 50V	1	
	C4866	EEH1A221P	C 220PF, J, 10V	1	
	C4867	FIJ1H474A757	C 0.47UF, 50V	1	
	C4868	FIJ1H474A757	C 0.47UF, 50V	1	
	C4869	FIJ1H474A757	C 0.47UF, 50V	1	
	C4870	FIG1C104A116	C 0.10UF, K, 16V	1	
	C4871	FIG1C104A116	C 0.10UF, K, 16V	1	
	C5001	FIG1C104A116	C 0.10UF, K, 16V	1	
	C5002	FIG1C104A116	C 0.10UF, K, 16V	1	
	C5003	FIG1C104A116	C 0.10UF, K, 16V	1	
	C5004	FIG1C104A116	C 0.10UF, K, 16V	1	
	C5005	FIH0J1050012	C 1UF, K, 16V	1	
	C5006	FIH0J1050012	C 1UF, K, 16V	1	
	C5007	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5008	FIG1C104A116	C 0.10UF, K, 16V	1	
	C5009	FIG1C104A116	C 0.10UF, K, 16V	1	
	C5010	FIG1C104A116	C 0.10UF, K, 16V	1	
	C5011	FIG1C104A116	C 0.10UF, K, 16V	1	
	C5012	FIG1C104A116	C 0.10UF, K, 16V	1	
	C5013	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5014	FIG1C104A116	C 0.10UF, K, 16V	1	
	C5015	FIG1C104A116	C 0.10UF, K, 16V	1	
	C5016	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C5017	FIG1C104A116	C 0.10UF, K, 16V	1	
	C5018	FIG1C104A116	C 0.10UF, K, 16V	1	
	C5019	FIG1C104A116	C 0.10UF, K, 16V	1	
	C5020	FIG1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5021	F1H0J1050012	C 1UF, K, 16V	1	
	C5022	F1H0J1050012	C 1UF, K, 16V	1	
	C5023	F1H0J1050012	C 1UF, K, 16V	1	
	C5024	F1H0J1050012	C 1UF, K, 16V	1	
	C5025	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5026	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5027	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5028	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5029	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5030	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5031	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5032	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5033	F1H0J1050012	C 1UF, K, 16V	1	
	C5034	F1H0J1050012	C 1UF, K, 16V	1	
	C5035	F1H0J1050012	C 1UF, K, 16V	1	
	C5036	F1H0J1050012	C 1UF, K, 16V	1	
	C5037	F1H0J1050012	C 1UF, K, 16V	1	
	C5038	F1H0J1050012	C 1UF, K, 16V	1	
	C5039	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5040	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5041	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5042	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5043	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5044	F1H0J1050012	C 1UF, K, 16V	1	
	C5045	F1H0J1050012	C 1UF, K, 16V	1	
	C5046	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5047	F1H0J1050012	C 1UF, K, 16V	1	
	C5048	F1H1A225A051	C 22UF, 50V	1	
	C5049	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5050	F1H0J1050012	C 1UF, K, 16V	1	
	C5051	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5052	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5053	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5054	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5055	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5056	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5057	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5058	ECGRL0G680ER	C 68PF, J, 4V	1	
	C5059	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5060	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5061	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5062	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5063	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5064	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5065	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5066	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5067	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5072	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5073	F1H1A225A051	C 22UF, 50V	1	
	C5200	F1G1H100A731	C 10PF, K, 50V	1	
	C5201	F1G1C9R0A118	C 9.0UF, K, 16V	1	PAVCA
	C5301	F1H1A1050032	C 10UF, 50V	1	
	C5302	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5303	F1H1A1050032	C 10UF, 50V	1	
	C5311	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5312	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5316	F1G1A473A053	C 0.47UF, 10V	1	
	C5317	F1H1A1050032	C 10UF, 50V	1	
	C5320	F1H1E104A129	C 0.1UF, 25V	1	
	C5321	F1G1C103A116	C 0.010UF, K, 16V	1	
	C5322	F1J1A475A039	C 4.7UF, K, 10V	1	
	C5323	F1G1H471A730	C 470UF, 50V	1	
	C5324	F1G1H221A459	C 220UF, 50V	1	
	C5325	F1G1C103A116	C 0.010UF, K, 16V	1	
	C5326	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5327	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5328	ECGRL0G680ER	C 68PF, J, 4V	1	
	C5329	ECGRL0G680ER	C 68PF, J, 4V	1	
	C5341	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5395	F1J1E105A171	C 1 UF 25V	1	
	C5396	EEH1B1E330P	C 33PF, J, 25V	1	
	C5397	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5399	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5600	F1H1A1050032	C 10UF, 50V	1	
	C5601	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5602	ECGRL0G680ER	C 68PF, J, 4V	1	
	C5603	F1G1C103A116	C 0.010UF, K, 16V	1	
	C5604	F1G1C223A116	C 0.022UF, K, 16V	1	
	C5605	F1J1A475A039	C 4.7UF, K, 10V	1	
	C5606	F1G1H471A730	C 470UF, 50V	1	
	C5607	F1G1H221A459	C 220UF, 50V	1	
	C5608	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5611	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5612	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5615	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5616	F1G1C223A116	C 0.022UF, K, 16V	1	
	C5617	F1H1A1050032	C 10UF, 50V	1	
	C5618	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5619	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5620	F1H1E104A129	C 0.1UF, 25V	1	
	C5621	F1G1A473A053	C 0.47UF, 10V	1	
	C5622	F1J1A475A039	C 4.7UF, K, 10V	1	
	C5623	F1G1H221A459	C 220UF, 50V	1	
	C5624	F1G1H221A459	C 220UF, 50V	1	
	C5625	F1G1C103A116	C 0.010UF, K, 16V	1	
	C5626	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5627	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5628	ECGRL0G680ER	C 68PF, J, 4V	1	
	C5629	ECGRL0G680ER	C 68PF, J, 4V	1	
	C5631	EEH1B1E470P	C 47PF, J, 25V	1	
	C5632	F1J1E105A171	C 1 UF 25V	1	
	C5636	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5637	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5638	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5639	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5640	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5641	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5642	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5643	F1H1E104A129	C 0.1UF, 25V	1	
	C5644	F1G1C103A116	C 0.010UF, K, 16V	1	
	C5646	F1H1H102A971	C 1000PF, K, 50V	1	
	C5650	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5651	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5652	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5653	F1G1H101A731	C 100PF, K, 50V	1	
	C5655	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5658	F1K1A106A021	C 0.010UF, K, 6.3V	1	
	C5659	F1K1C1060004	C 0.010UF, 16V	1	
	C5660	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5661	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5662	F1K1A106A021	C 0.010UF, K, 6.3V	1	
	C5663	F1K1C1060004	C 0.010UF, 16V	1	
	C5664	F1G1C103A116	C 0.010UF, K, 16V	1	
	C5665	F1G1C103A116	C 0.010UF, K, 16V	1	
	C5666	F1H1E104A129	C 0.1UF, 25V	1	
	C5667	F1H1E104A129	C 0.1UF, 25V	1	
	C5676	F1H1E104A129	C 0.1UF, 25V	1	
	C5677	F1H1E104A129	C 0.1UF, 25V	1	
	C5678	F1G1E392A123	C 3900UF, Z, 25V	1	PAVCA

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5679	FI1G1E392A123	C 3900UF, Z, 25V	1	PAVCA
	C5688	FI1H1A225A051	C 22UF, 50V	1	
	C5689	EEEH1E470P	C 47PF, J, 25V	1	
	C5765	FI1G1A473A053	C 0.47UF, 10V	1	
	C5766	FI1G1C103A116	C 0.010UF, K, 16V	1	
	C5767	FI1G1C103A116	C 0.010UF, K, 16V	1	
	C7700	FI1H1C104A143	C 0.1UF, K, 16V	1	
	C7701	FI1H1A225A051	C 22UF, 50V	1	
	C7702	F2G0G101A007	E 100UF 6.3V	1	
	C7704	FI1H1A1050032	C 10UF, 50V	1	
	C7705	FI1H1C104A143	C 0.1UF, K, 16V	1	
	C7706	FI1H1A1050032	C 10UF, 50V	1	
	C7708	FI1H1A1050032	C 10UF, 50V	1	
	C7709	FI1H1A225A051	C 22UF, 50V	1	
	C7710	FI1J0J106A020	C 0.010UF, K, 16V	1	
	C7711	FI1J0J106A020	C 0.010UF, K, 16V	1	
	C7712	FI1H1C104A143	C 0.1UF, K, 16V	1	
	C7713	FI1H1H150A971	C 15PF, K, 50V	1	
	C7714	FI1H1C104A143	C 0.1UF, K, 16V	1	
	C7715	FI1H1H220A971	C 22PF, K, 50V	1	
	C7716	FI1J0J106A020	C 0.010UF, K, 16V	1	
	C7717	FI1H1C104A143	C 0.1UF, K, 16V	1	
	C7718	FI1J0J106A020	C 0.010UF, K, 16V	1	
	C7719	FI1H1C104A143	C 0.1UF, K, 16V	1	
	C7720	FI1H1C104A143	C 0.1UF, K, 16V	1	
	C7721	FI1J0J106A020	C 0.010UF, K, 16V	1	
	C7724	FI1H1H150A971	C 15PF, K, 50V	1	
	C7725	FI1H1H150A971	C 15PF, K, 50V	1	
	C7729	FI1H1H150A971	C 15PF, K, 50V	1	
	C7731	FI1H1H150A971	C 15PF, K, 50V	1	
	C7732	FI1H1C104A144	C 0.1UF, K, 16V	1	
	C7733	FI1H1C104A144	C 0.1UF, K, 16V	1	
	C7736	FI1H1C104A144	C 0.1UF, K, 16V	1	
	C7737	FI1J0J106A020	C 0.010UF, K, 16V	1	
	C7738	F2G0G101A007	E 100UF 6.3V	1	
	C7742	FI1J0J106A020	C 0.010UF, K, 16V	1	
	C8001	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8002	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8003	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8004	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8005	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8006	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8007	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8008	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8009	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8010	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8011	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C8012	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C8014	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8015	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8016	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8017	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8018	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8019	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8020	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8021	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8022	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8023	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8024	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8025	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C8026	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C8027	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8028	FI1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8029	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8030	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8031	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8032	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8033	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C8034	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8035	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8036	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8037	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8038	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8039	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8040	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8041	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8042	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8043	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8044	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8045	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C8046	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C8047	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C8048	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C8049	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8050	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8051	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8052	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8053	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8054	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8055	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8056	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8057	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8058	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8059	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8060	FI1H0J1050012	C 1UF, K, 16V	1	
	C8061	FI1H0J1050012	C 1UF, K, 16V	1	
	C8062	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8070	FI1H0J1050012	C 1UF, K, 16V	1	
	C8071	FI1H0J1050012	C 1UF, K, 16V	1	
	C8072	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8073	FI1H0J1050012	C 1UF, K, 16V	1	
	C8074	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8075	FI1H0J1050012	C 1UF, K, 16V	1	
	C8076	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8077	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8078	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8079	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8080	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8081	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8082	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8083	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8084	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8085	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8101	FI1G1H180A731	C 18UF, 50V	1	
	C8102	FI1G1H6R0A732	C 6.0UF, 50V	1	PAVCA
	C8103	FI1H0J1050012	C 1UF, K, 16V	1	
	C8104	FI1G1C103A116	C 0.010UF, K, 16V	1	
	C8105	FI1J1A106A043	C 0.010UF, K, 10V	1	
	C8106	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8107	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8201	FI1G1A105A047	C 1UF, K, 10V	1	
	C8202	ECGMX0E101R	E 100UF, 10V	1	
	C8203	FI1G1A105A047	C 1UF, K, 10V	1	
	C8204	FI1G1A105A047	C 1UF, K, 10V	1	
	C8205	FI1G1A105A047	C 1UF, K, 10V	1	
	C8206	FI1G1A105A047	C 1UF, K, 10V	1	
	C8208	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8209	FI1G1A105A047	C 1UF, K, 10V	1	
	C8210	FI1G1A105A047	C 1UF, K, 10V	1	
	C8211	FI1G1A105A047	C 1UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8212	FlG1A105A047	C 1UF, K, 10V	1	
	C8213	FlG1A105A047	C 1UF, K, 10V	1	
	C8214	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8215	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8216	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8217	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8218	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8219	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8220	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8221	FlG1A105A047	C 1UF, K, 10V	1	
	C8222	FlG1A105A047	C 1UF, K, 10V	1	
	C8223	FlG1A105A047	C 1UF, K, 10V	1	
	C8224	FlG1A105A047	C 1UF, K, 10V	1	
	C8225	FlG1A105A047	C 1UF, K, 10V	1	
	C8226	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8227	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8228	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8229	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8230	FlG1A105A047	C 1UF, K, 10V	1	
	C8231	ECGMX0E101R	E 100UF, 10V	1	
	C8232	FlG1A105A047	C 1UF, K, 10V	1	
	C8233	FlG1A105A047	C 1UF, K, 10V	1	
	C8234	FlG1A105A047	C 1UF, K, 10V	1	
	C8235	FlG1A105A047	C 1UF, K, 10V	1	
	C8301	FlG1H102A730	C 1000UF, 50V	1	
	C8302	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8303	FlG1H103A735	C 0.01UF, 50V	1	
	C8304	FlG1H221A459	C 220UF, 50V	1	
	C8305	FlG1H221A459	C 220UF, 50V	1	
	C8307	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8310	F2G0J2210013	E 220UF 6.3V	1	
	C8311	F2G1V220A020	E 22UF, 35V	1	
	C8312	F2G0J2210013	E 220UF 6.3V	1	
	C8313	FlG1H102A730	C 1000UF, 50V	1	
	C8314	FlG1H270A731	C 27UF, 50V	1	
	C8315	FlG1H120A731	C 12UF, 50V	1	
	C8316	FlG1H120A731	C 12UF, 50V	1	
	C8317	FlG1H270A731	C 27UF, 50V	1	
	C8318	FlG1H101A731	C 100PF, K, 50V	1	
	C8319	FlG1H101A731	C 100PF, K, 50V	1	
	C8320	FlG1H220A731	C 22UF, 50V	1	
	C8321	FlG1C103A116	C 0.010UF, K, 16V	1	
	C8322	FlG1C103A116	C 0.010UF, K, 16V	1	
	C8323	FlG1H120A731	C 12UF, 50V	1	
	C8324	FlG1H120A731	C 12UF, 50V	1	
	C8325	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8326	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8327	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8328	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8330	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8331	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8332	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8333	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8334	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8335	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8336	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C8337	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8338	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8339	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8340	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8341	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8342	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8343	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8345	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8346	FlG1C103A116	C 0.010UF, K, 16V	1	
	C8347	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8348	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8349	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8350	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8351	FlG1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8352	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8353	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8354	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8355	F1H0J1050012	C 1UF, K, 16V	1	
	C8357	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C8358	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C8359	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C8360	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8361	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8362	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8363	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8364	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8365	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8366	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8367	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8368	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8369	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C8370	FlG1H102A730	C 1000UF, 50V	1	
	C8371	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C8372	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C8373	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8374	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C8375	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C8376	FlG1C103A116	C 0.010UF, K, 16V	1	
	C8377	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8378	FlG1C103A116	C 0.010UF, K, 16V	1	
	C8379	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8380	FlG1H103A735	C 0.01UF, 50V	1	
	C8381	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8382	FlG1C103A116	C 0.010UF, K, 16V	1	
	C8386	FlG1H102A730	C 1000UF, 50V	1	
	C8387	FlG1H102A730	C 1000UF, 50V	1	
	C8500	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8501	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8502	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8503	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8504	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8505	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8506	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8507	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8508	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8511	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8512	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8513	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8514	F2G0J220A019	E 100UF 6.3V	1	
	C8515	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8516	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8517	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8518	F2G0J470A019	E 47UF 6.3V	1	
	C8519	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8520	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8521	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8522	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8523	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8524	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8525	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8527	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C8528	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8529	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8530	F2G0J470A019	E 47UF 6.3V	1	
	C8531	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8532	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8533	FlG1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8534	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C8535	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8536	FI1G1H270A731	C 27UF, 50V	1	
	C8538	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8539	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C8540	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C8541	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8542	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8543	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8544	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C8545	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8546	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8547	F2G0J101A019	E 100UF 6.3V	1	
	C8548	FIH0J1050012	C 1UF, K, 16V	1	
	C8549	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8550	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C8551	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8552	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C8553	ECUV1A335KBN	C 33UF 10V	1	
	C8554	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8555	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8556	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8557	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C8558	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8559	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8560	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C8561	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8562	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8563	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8564	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8565	FI1G1C103A116	C 0.010UF, K, 16V	1	
	C8566	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C8578	FI1G1A105A047	C 1UF, K, 10V	1	
	C8580	FI1G1A105A047	C 1UF, K, 10V	1	
	C8581	FI1G1A105A047	C 1UF, K, 10V	1	
	C9033	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9034	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9035	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C9036	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C9037	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C9055	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9056	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9057	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9058	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C9064	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C9065	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C9066	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C9067	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C9068	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C9069	FI1G1E103A123	C 0.010UF, K, 16V	1	
	C9096	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9097	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9098	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9099	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9100	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9101	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9102	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9103	FI1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9104	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9105	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9106	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9107	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9108	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9109	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9110	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9111	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9112	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9113	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9114	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9115	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9116	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9117	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9119	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9120	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9121	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9122	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9123	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9124	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9125	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9126	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9127	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9128	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9129	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9130	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9131	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9132	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9133	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9135	FIJ1A106A043	C 0.010UF, K, 10V	1	
	C9136	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9138	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9139	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9140	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9142	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9143	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9144	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9145	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9146	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9147	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9148	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9149	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9150	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9152	FIJ0J475A035	C 4.7UF, K, 16V	1	
	C9153	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9154	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9155	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9156	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9157	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9158	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9159	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9160	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9161	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9162	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9163	FIJ0J475A035	C 4.7UF, K, 16V	1	
	C9164	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9165	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9168	FI1G1C104A119	C 0.10UF, K, 16V	1	
	C9169	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9170	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9171	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9172	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9173	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9174	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9175	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9176	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9177	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9178	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9179	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9180	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9181	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9182	FI1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9183	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9184	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9185	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9186	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9187	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9188	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9189	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9190	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9191	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9192	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9193	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9194	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9195	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9196	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9198	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9199	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9200	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9201	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9202	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9203	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9204	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9205	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9206	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9207	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9208	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9209	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9210	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9211	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9212	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9213	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9214	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9215	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9216	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9217	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9218	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9219	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9220	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9221	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9222	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9223	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9224	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9226	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9227	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9228	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9230	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9231	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9232	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9233	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9234	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9235	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9236	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9237	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9239	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9240	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9241	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9242	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9243	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9244	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9245	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9246	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9247	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9248	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9249	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9250	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9469	FlG1C104A119	C 0.10UF, K, 16V	1	
	C9535	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9536	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9537	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9538	FlG1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9539	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9540	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9541	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9542	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9543	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9544	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9545	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9546	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9547	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9548	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9549	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9550	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9551	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9552	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9553	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9823	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9825	FlG1H101A731	C 100PF, K, 50V	1	
	C9832	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9837	FlJ1A106A043	C 0.010UF, K, 10V	1	
	C9840	FlG1E103A123	C 0.010UF, K, 16V	1	
	C9841	FlG1C104A119	C 0.10UF, K, 16V	1	
	C9842	FlG1C104A119	C 0.10UF, K, 16V	1	
	C9844	FlG1E103A123	C 0.010UF, K, 16V	1	
	C9845	FlG1C104A119	C 0.10UF, K, 16V	1	
	C9846	FlG1C104A119	C 0.10UF, K, 16V	1	
	C9858	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9859	FlG1E103A123	C 0.010UF, K, 16V	1	
	C9860	FlJ0J475A035	C 4.7UF, K, 16V	1	
	C9861	FlH1E104A129	C 0.1UF, 25V	1	
	C9862	FlH1E104A129	C 0.1UF, 25V	1	
	C9863	FlJ0J475A035	C 4.7UF, K, 16V	1	
	C9864	FlH1E104A129	C 0.1UF, 25V	1	
	C9865	ECGRL0G680ER	C 68PF, J, 4V	1	
	C9866	ECGRL0G680ER	C 68PF, J, 4V	1	
	C9867	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9868	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9869	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9870	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9871	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9872	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9873	ECGRL0G680ER	C 68PF, J, 4V	1	
	C9874	FlG1H680A731	C 68UF, 50V	1	
	C9877	FlG1H680A731	C 68UF, 50V	1	
	C9878	FlG1E103A123	C 0.010UF, K, 16V	1	
	C9879	FlG1C153A116	C 0.015UF, K, 16V	1	
	C9880	FlG1A563A032	C 0.56UF, 10V	1	
	C9881	FlG1E103A123	C 0.010UF, K, 16V	1	
	C9882	FlG1C822A116	C 8200UF, K, 16V	1	
	C9883	FlG1H101A731	C 100PF, K, 50V	1	
	C9884	FlG1H102A730	C 1000UF, 50V	1	
	C9885	FlG1H102A730	C 1000UF, 50V	1	
	C9886	FlH1E104A129	C 0.1UF, 25V	1	
	C9887	FlH1E104A129	C 0.1UF, 25V	1	
	C9888	FlG1H361A731	C 360UF, 50V	1	
	C9927	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9928	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9929	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9930	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9931	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9932	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9933	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9934	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9935	FlG1C104A116	C 0.10UF, K, 16V	1	
	C9936	FlG1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9937	FIG1C104A116	C 0.10UF, K, 16V	1	
	C9938	FIG1C104A116	C 0.10UF, K, 16V	1	
	C9939	FIG1C104A116	C 0.10UF, K, 16V	1	
	C9940	FIG1C104A116	C 0.10UF, K, 16V	1	
	C9941	FIG1C104A116	C 0.10UF, K, 16V	1	
	C9942	FIG1C104A116	C 0.10UF, K, 16V	1	
	C9943	FIG1C104A116	C 0.10UF, K, 16V	1	
	C9944	FIG1C104A116	C 0.10UF, K, 16V	1	
	C9945	FIG1C104A116	C 0.10UF, K, 16V	1	
	C9946	FIG1C104A116	C 0.10UF, K, 16V	1	
	C9947	FIG1C104A116	C 0.10UF, K, 16V	1	
	C9948	FIG1C104A116	C 0.10UF, K, 16V	1	
	C9951	FIG1C104A116	C 0.10UF, K, 16V	1	
	C9961	FIG1A106A043	C 0.010UF, K, 10V	1	
	C9966	FIG1C104A116	C 0.10UF, K, 16V	1	
	C9971	FIG1H180A731	C 18UF, 50V	1	
	C9972	FIG1H150A731	C 15UF, 50V	1	
	D3	K1KA14B00129	14P CONNECTOR	1	
	D5	K1KB31BA0064	31P CONNECTOR	1	
	D6	K1KA20AA0009	20P CONNECTOR	1	
	D20	K1MN35BA0266	35P CONNECTOR	1	
	D25	K1KA13B00069	13P CONNECTOR	1	
	D31	K1MN68BA0266	68P CONNECTOR	1	
	D32	K1MN68BA0266	68P CONNECTOR	1	
	D33	K1MN68BA0266	68P CONNECTOR	1	
	D34	K1MN68BA0266	68P CONNECTOR	1	
	D35	K1MN68BA0266	68P CONNECTOR	1	
	D36	K1MN68BA0266	68P CONNECTOR	1	
	D851	MA2J11100L	DIODE	1	
	D852	MA2J11100L	DIODE	1	
	D856	MA2J11100L	DIODE	1	
	D857	MA2J11100L	DIODE	1	
	D859	B0JCM000037	DIODE	1	
	D860	MAZ81400ML	ZENER DIODE	1	
	D861	MA2J11100L	DIODE	1	
	D862	MAZ80330LL	ZENER DIODE	1	
	D1107	MA704A	DIODE	1	
	D1112	MA2J11100L	DIODE	1	
	D2000	MA8160H	ZENER DIODE	1	
	D2001	MA8160H	ZENER DIODE	1	
	D2002	MA8160H	ZENER DIODE	1	
	D2003	MA8160H	ZENER DIODE	1	
	D2301	MA2J11100L	DIODE	1	
	D2512	MA8043LTX	ZENER DIODE	1	
	D3005	K7AAAY000003	PHOTO LINK	1	
	D3048	MAZ81400ML	ZENER DIODE	1	
	D3051	MAZ81400ML	ZENER DIODE	1	
	D3052	MAZ81400ML	ZENER DIODE	1	
	D3053	MAZ81400ML	ZENER DIODE	1	
	D3054	MAZ81400ML	ZENER DIODE	1	
	D3063	MAZ81400ML	ZENER DIODE	1	
	D3064	MAZ81400ML	ZENER DIODE	1	
	D3065	MAZ81400ML	ZENER DIODE	1	
	D3066	MAZ81400ML	ZENER DIODE	1	
	D3067	MAZ81400ML	ZENER DIODE	1	
	D3068	MAZ81400ML	ZENER DIODE	1	
	D3069	MAZ81400ML	ZENER DIODE	1	
	D3070	MAZ81400ML	ZENER DIODE	1	
	D3071	MAZ81400ML	ZENER DIODE	1	
	D3072	MAZ81400ML	ZENER DIODE	1	
	D3073	MAZ81400ML	ZENER DIODE	1	
	D3076	MAZ81400ML	ZENER DIODE	1	
	D3077	MAZ81400ML	ZENER DIODE	1	
	D3078	MAZ81400ML	ZENER DIODE	1	
	D3079	MAZ81400ML	ZENER DIODE	1	
	D3080	MAZ81400ML	ZENER DIODE	1	
	D3085	MAZ81400ML	ZENER DIODE	1	
	D3086	MAZ81400ML	ZENER DIODE	1	
	D3087	MAZ81400ML	ZENER DIODE	1	
	D3088	MAZ81400ML	ZENER DIODE	1	
	D3089	MAZ81400ML	ZENER DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D3701	MAZ81400ML	ZENER DIODE	1	
	D3702	MAZ81400ML	ZENER DIODE	1	
	D3709	MAZ80510LL	ZENER DIODE	1	
	D3710	MAZ80510LL	ZENER DIODE	1	
	D3711	MAZ81400ML	ZENER DIODE	1	
	D3801	EZAEG2A50AX	DIODE	1	
	D3802	EZAEG2A50AX	DIODE	1	
	D3803	EZAEG2A50AX	DIODE	1	
	D3804	EZAEG2A50AX	DIODE	1	
	D3805	EZAEG2A50AX	DIODE	1	
	D3806	EZAEG2A50AX	DIODE	1	
	D3807	EZJZ0V80008B	VARISTOR	1	
	D3808	EZJZ0V80008B	VARISTOR	1	
	D3809	EZAEG2A50AX	DIODE	1	
	D3810	EZAEG2A50AX	DIODE	1	
	D3811	EZJZ0V80008B	VARISTOR	1	
	D3813	B0HCMM000014	DIODE	1	
	D3814	B0HCMM000014	DIODE	1	
	D3815	EZJZ0V120JA	VARISTOR	1	
	D4502	EZAEG2A50AX	DIODE	1	
	D4503	EZAEG2A50AX	DIODE	1	
	D4504	EZAEG2A50AX	DIODE	1	
	D4505	EZAEG2A50AX	DIODE	1	
	D4506	EZAEG2A50AX	DIODE	1	
	D4507	EZAEG2A50AX	DIODE	1	
	D4508	EZAEG2A50AX	DIODE	1	
	D4509	EZAEG2A50AX	DIODE	1	
	D4510	EZAEG2A50AX	DIODE	1	
	D4511	EZAEG2A50AX	DIODE	1	
	D4512	EZAEG2A50AX	DIODE	1	
	D4513	MA3056MTX	ZENER DIODE	1	
	D4514	EZAEG2A50AX	DIODE	1	
	D4515	MA3056MTX	ZENER DIODE	1	
	D4516	EZAEG2A50AX	DIODE	1	
	D4517	EZAEG2A50AX	DIODE	1	
	D4518	EZAEG2A50AX	DIODE	1	
	D4519	EZAEG2A50AX	DIODE	1	
	D4520	EZAEG2A50AX	DIODE	1	
	D4521	EZAEG2A50AX	DIODE	1	
	D4522	EZAEG2A50AX	DIODE	1	
	D4523	EZAEG2A50AX	DIODE	1	
	D4524	B0HCMM000014	DIODE	1	
	D4525	B0HCMM000014	DIODE	1	
	D4526	B0HCMM000014	DIODE	1	
	D4527	B0HCMM000014	DIODE	1	
	D4550	EZAEG2A50AX	DIODE	1	
	D4551	EZAEG2A50AX	DIODE	1	
	D4552	EZAEG2A50AX	DIODE	1	
	D4553	EZAEG2A50AX	DIODE	1	
	D4554	EZAEG2A50AX	DIODE	1	
	D4555	EZAEG2A50AX	DIODE	1	
	D4556	EZAEG2A50AX	DIODE	1	
	D4557	EZAEG2A50AX	DIODE	1	
	D4560	MA3056MTX	ZENER DIODE	1	
	D4564	EZAEG2A50AX	DIODE	1	
	D4565	EZAEG2A50AX	DIODE	1	
	D4568	B0HCMM000014	DIODE	1	
	D4569	MA2J11100L	DIODE	1	
	D4800	MA22D3900L	DIODE	1	
	D4801	MA2J11100L	DIODE	1	
	D4803	MA3X78900L	ZENER DIODE	1	
	D4804	MA2J11100L	DIODE	1	
	D4805	MA2J11100L	DIODE	1	
	D4806	MA2J11100L	DIODE	1	
	D4807	MA2J11100L	DIODE	1	
	D4808	MA2J11100L	DIODE	1	
	D4809	B0BC03900015	ZENER DIODE	1	
	D4810	MA2J11100L	DIODE	1	
	D5301	MA22D3900L	DIODE	1	
	D5302	MA22D3900L	DIODE	1	
	D5303	B0JCDD000002	DIODE	1	
	D5304	B0JCDD000002	DIODE	1	
	D5307	B0BC4R000002	ZENER DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D5308	B0BC4R000002	ZENER DIODE	1	
	D5601	MA22D3900L	DIODE	1	
	D5602	MA22D3900L	DIODE	1	
	D5603	B0JCDD000002	DIODE	1	
	D5604	B0JCDD000002	DIODE	1	
	D5605	MA22D3900L	DIODE	1	
	D5606	B0JCDD000002	DIODE	1	
	D5610	MA2J72800L	ZENER DIODE	1	
	D5611	MA2J11100L	DIODE	1	
	D5612	MA2J11100L	DIODE	1	
	D5613	MA2J11100L	DIODE	1	
	D5614	MA3X152D0L	DIODE	1	
	D5615	MA3X152D0L	DIODE	1	
	D5617	B0BC6R600005	ZENER DIODE	1	
	D5618	B0BC01100001	ZENER DIODE	1	
	D5619	B0JCME000037	DIODE	1	
	D5620	B0JCME000037	DIODE	1	
	D5621	B0BC4R700007	ZENER DIODE	1	
	D5622	B0BC4R700007	ZENER DIODE	1	
	D5623	B0BC4R700007	ZENER DIODE	1	
	D5624	B0BC4R700007	ZENER DIODE	1	
	D5692	MAZ80560LL	ZENER DIODE	1	
	D7800	B3AEB0000107	LED	1	
	D9021	B0JCCE000008	DIODE	1	
	D9022	B0JCCE000008	DIODE	1	
	D9023	B0JCCE000008	DIODE	1	
	D9024	B0JCCE000008	DIODE	1	
	D9025	B0JCCE000008	DIODE	1	
	D9026	B0JCCE000008	DIODE	1	
	D9027	B0BC3R3A0273	ZENER DIODE	1	
	D9028	B0BC3R3A0273	ZENER DIODE	1	
	D9029	B0BC3R3A0273	ZENER DIODE	1	
	D9110	B0JCGD000002	DIODE	1	
	D9807	B0JCCE000008	DIODE	1	
	D9808	B0JCCE000008	DIODE	1	
	D9812	MA22D3900L	DIODE	1	
	D9813	B0JCGD000002	DIODE	1	
	D9814	B0JCGD000002	DIODE	1	
	D9815	B0JCGD000002	DIODE	1	
	D9816	MA22D3900L	DIODE	1	
	D9817	MA22D3900L	DIODE	1	
	D2520A	LN1271RAL-TR	LED	1	
	FL2000	TAXA0024	LC FILTER	1	
	FL2001	TAXA0024	LC FILTER	1	
	FL2100	J0HAAB000036	LC FILTER	1	
	FL2102	J0HAAB000036	LC FILTER	1	
	FL2103	J0HAAB000036	LC FILTER	1	
	FL2104	J0HAAB000036	LC FILTER	1	
	FL3010	J0MAB0000140	LC FILTER	1	
	FL3011	J0MAB0000140	LC FILTER	1	
	FL3710	J0ZZA0000091	FILTER	1	
	FL3711	J0ZZA0000091	FILTER	1	
	FL3712	J0ZZA0000091	FILTER	1	
	FL3802	J0MAB0000170	LC FILTER	1	
	FL3803	J0MAB0000170	LC FILTER	1	
	FL3804	J0MAB0000170	LC FILTER	1	
	FL3805	J0MAB0000170	LC FILTER	1	
	FL4400	J0JAD0000028	CHIP INDUCTOR	1	
	FL4401	J0JAD0000028	CHIP INDUCTOR	1	
	FL4402	J0JAD0000028	CHIP INDUCTOR	1	
	FL4403	J0JAD0000028	CHIP INDUCTOR	1	
	FL4404	J0JAD0000028	CHIP INDUCTOR	1	
	FL4405	J0JAD0000028	CHIP INDUCTOR	1	
	FL9803	FL1J1E104A148	C 0.10UF, Z, 25V	1	
	FL9805	FL1J1E104A148	C 0.10UF, Z, 25V	1	
	FL9806	FL1J1E104A148	C 0.10UF, Z, 25V	1	
	G51	K1KA11BA0062	11P CONNECTOR	1	
	GH10	K1FY121E0001	CONNECTOR	1	
	GH11	K1KA30AA0009	30P CONNECTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	GL02	K1KA02B00294	2P CONNECTOR	1	
	GS02	K1KA02A00787	2P CONNECTOR	1	
	GS09	K1KA06A00508	6P CONNECTOR	1	
	IC850	C0DBAZF00003	IC	1	
	IC1100	MNZSFG3GP61	IC	1	
	IC1101	TVRP919SS	IC	1	PAVCA
	IC2008	C0CBCBE00001	IC	1	
	IC2009	C0ZBZ0001361	IC	1	
	IC2106	C1AB00002908	IC	1	
	IC2107	C0DBFFD00003	IC	1	
	IC2301	C1AB00002875	IC	1	
	IC2302	C1AB00002875	IC	1	
	IC3001	C1AB00002855	IC	1	
	IC3801	C1AB00002835	IC	1	
	IC3802	TVRP822S	IC	1	PAVCA
				1	
	IC4502	TVRQ120S	IC	1	PAVCA
	IC4503	C1AB00002929	IC	1	
	IC4505	C0JBAZ002301	IC	1	
	IC4506	C0JBAZ002301	IC	1	
	IC4510	C1AB00002966	IC	1	
	IC4511	C0CBCBE00001	IC	1	
	IC4512	C0DBGYY00477	IC	1	
	IC4513	C0DBGYY00477	IC	1	
	IC4800	C1AB00002877	IC	1	
	IC4801	C1ZBZ0003775	IC	1	
	IC4802	C0JBAZ002060	IC	1	
	IC5001	C3ABRY000038	IC	1	
	IC5002	C3ABRY000038	IC	1	
	IC5100	MN84527	IC	1	
	IC5300	C0CBCBD00062	IC	1	
	IC5301	C0DBAYY00274	IC	1	
	IC5402	C0EBM0000026	IC	1	
	IC5600	C0DBAYY00273	IC	1	
	IC5601	C0DBAYY00274	IC	1	
	IC5603	C0EBF0000354	IC	1	
	IC5604	C0DBAYY00183	IC	1	
	IC5605	C0DBAYY00183	IC	1	
	IC7700	TVRP965	IC	1	
	IC7701	C0DBEHG00006	IC	1	
	IC7702	C1CB00002917	IC	1	PAVCA
	IC8001	MN2WS0031CTY	IC	1	
	IC8101	C0ZBZ0001567	IC	1	
	IC8201	C3ABSY000010	IC	1	
	IC8202	C3ABSY000010	IC	1	
	IC8203	C3ABSY000010	IC	1	
	IC8204	C3ABSY000010	IC	1	
	IC8300	MN884350	IC	1	PAVCA
	IC8500	TVRP890S	IC	1	PAVCA
	IC8501	C3ZBN0000030	IC	1	PAVCA
	IC8502	C1DB00001385	IC	1	
	IC8503	C3EBCG000100	IC	1	
	IC8504	C1CB00002607	IC	1	
	IC8505	C0DBZYY00266	IC	1	
	IC8506	TVRQ112S	IC	1	PAVCA
	IC9001	TVRQ057S	IC	1	PAVCA
	IC9002	C1ZBZ0003577	IC	1	
	IC9003	MN103SG4GPF3	IC	1	
	IC9011	C0EBF0000431	IC	1	
	IC9013	C0JBAZ002060	IC	1	
	IC9016	C0JBAZ001120	IC	1	
	IC9017	C0JBAZ001120	IC	1	
	IC9018	C0JBAZ001120	IC	1	
	IC9019	C0JBAZ001120	IC	1	
	IC9300	MN84526	IC	1	
	IC9301	C3ABQJ000055	IC	1	
	IC9303	TVRQ067S	IC	1	PAVCA
	IC9400	MN84526	IC	1	
	IC9401	C3ABQJ000055	IC	1	
	IC9500	C1ZBZ0003760	IC	1	
	IC9802	C0JBAZ001120	IC	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	IC9803	C0JBAY001120	IC	1	
	IC9805	C0DBAY00274	IC	1	
	IC9806	C0DBAY00273	IC	1	
	JA1	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JA2	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JA3	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JA4	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JA5	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JA6	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JA7	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JK3000	K1U932A00001	CONNECTOR UNIT	1	PAVCA
	JK3001	K1FB315A00006	CONNECTOR	1	
	JK3002	K1FA209A00003	CONNECTOR	1	PAVCA
	JK3701	K4AK13B00002	TERMINAL BOARD	1	PAVCA
	JK4500	K1FY119D00005	CONNECTOR	1	
	JK4501	K1FY119D00005	CONNECTOR	1	
	JK4502	K1FY119D00005	CONNECTOR	1	
	JK7702	K1NA09E000080	9P CONNECTOR	1	
	JK8500	K2LC1Y1A00006	JACK	1	
	JS2010	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS2015	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS2088	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS2300	D0YAR0000007	M 0 OHM 1/4W	1	
	JS3051	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS3052	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS3053	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS3054	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS3055	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS3056	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS3058	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS4802	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	JS7700	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	K1	K1KA11B000092	11P CONNECTOR	1	
	L852	G0C101KA0167	PEAKING COIL	1	
	L1100	J0JYC0000068	CHIP INDUCTOR	1	
	L2011	G1C220MA0291	INDUCTION COIL	1	
	L2013	G1C220MA0291	INDUCTION COIL	1	
	L2015	G1C220MA0291	INDUCTION COIL	1	
	L2017	G1C220MA0291	INDUCTION COIL	1	
	L2029	J0JCC0000059	CHIP INDUCTOR	1	
	L2038	J0JYC0000068	CHIP INDUCTOR	1	
	L2041	J0JYC0000068	CHIP INDUCTOR	1	
	L2300	G1C220MA0291	INDUCTION COIL	1	
	L2302	G1C220MA0291	INDUCTION COIL	1	
	L2304	G1C220MA0291	INDUCTION COIL	1	
	L2306	G1C220MA0291	INDUCTION COIL	1	
	L2308	J0JHC0000042	CHIP INDUCTOR	1	
	L3000	J0JYC0000068	CHIP INDUCTOR	1	
	L3001	J0JYC0000068	CHIP INDUCTOR	1	
	L3308	J0JCC0000269	CHIP INDUCTOR	1	
	L3309	J0JCC0000269	CHIP INDUCTOR	1	
	L3512	J0JHC0000042	CHIP INDUCTOR	1	
	L3801	J0JHC0000078	CHIP INDUCTOR	1	
	L3804	J0JHC0000078	CHIP INDUCTOR	1	
	L3805	J0JHC0000078	CHIP INDUCTOR	1	
	L4500	J0JHC0000078	CHIP INDUCTOR	1	
	L4501	J0JHC0000078	CHIP INDUCTOR	1	
	L4502	J0JHC0000078	CHIP INDUCTOR	1	
	L4503	J0JHC0000078	CHIP INDUCTOR	1	
	L4504	J0JHC0000078	CHIP INDUCTOR	1	
	L4505	J0JHC0000078	CHIP INDUCTOR	1	
	L4506	J0JHC0000078	CHIP INDUCTOR	1	
	L4507	J0JHC0000078	CHIP INDUCTOR	1	
	L4508	J0JHC0000078	CHIP INDUCTOR	1	
	L4511	J0JHC0000078	CHIP INDUCTOR	1	
	L4512	J0JCC0000241	CHIP INDUCTOR	1	
	L4513	J0JCC0000241	CHIP INDUCTOR	1	
	L4514	J0JYC0000068	CHIP INDUCTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L4515	J0JYC0000068	CHIP INDUCTOR	1	
	L4516	J0JYC0000068	CHIP INDUCTOR	1	
	L4517	J0JYC0000068	CHIP INDUCTOR	1	
	L4518	J0JYC0000068	CHIP INDUCTOR	1	
	L4519	J0JYC0000068	CHIP INDUCTOR	1	
	L4520	J0JHC0000078	CHIP INDUCTOR	1	
	L4521	J0JHC0000078	CHIP INDUCTOR	1	
	L4522	J0JHC0000078	CHIP INDUCTOR	1	
	L4523	J0JHC0000078	CHIP INDUCTOR	1	
	L4800	J0JYC0000068	CHIP INDUCTOR	1	
	L4801	G1C470MA0291	INDUCTION COIL	1	
	L4802	G1C100MA0072	INDUCTION COIL	1	
	L5001	J0JHC0000045	CHIP INDUCTOR	1	
	L5002	J0JHC0000045	CHIP INDUCTOR	1	
	L5004	J0JHC0000045	CHIP INDUCTOR	1	
	L5005	J0JHC0000045	CHIP INDUCTOR	1	
	L5006	J0JHC0000045	CHIP INDUCTOR	1	
	L5300	G1C2R2Z00007	INDUCTION COIL	1	
	L5301	G1C2R2Z00007	INDUCTION COIL	1	
	L5302	J0JHC0000078	CHIP INDUCTOR	1	
	L5304	G1C100MA0203	INDUCTION COIL	1	
	L5305	J0JHC0000075	CHIP INDUCTOR	1	
	L5600	G1C3R9Z00003	INDUCTION COIL	1	
	L5601	G1C3R9Z00003	INDUCTION COIL	1	
	L5602	G1C2R2Z00007	INDUCTION COIL	1	
	L5604	G1C100MA0203	INDUCTION COIL	1	
	L5605	J0JHC0000075	CHIP INDUCTOR	1	
	L5606	G1C100MA0203	INDUCTION COIL	1	
	L5610	G1C330M00027	INDUCTION COIL	1	
	L5611	G1C330M00027	INDUCTION COIL	1	
	L5613	J0JHC0000075	CHIP INDUCTOR	1	
	L7704	J0JHC0000045	CHIP INDUCTOR	1	
	L7705	J0JHC0000045	CHIP INDUCTOR	1	
	L8030	J0JHC0000045	CHIP INDUCTOR	1	
	L8031	J0JHC0000045	CHIP INDUCTOR	1	
	L8032	J0JHC0000045	CHIP INDUCTOR	1	
	L8034	J0JHC0000045	CHIP INDUCTOR	1	
	L8035	J0JHC0000045	CHIP INDUCTOR	1	
	L8036	J0JHC0000045	CHIP INDUCTOR	1	
	L8101	J0JHC0000045	CHIP INDUCTOR	1	
	L8201	J0JHC0000045	CHIP INDUCTOR	1	
	L8301	J0JHC0000045	CHIP INDUCTOR	1	
	L8302	J0JHC0000045	CHIP INDUCTOR	1	
	L8303	J0JHC0000045	CHIP INDUCTOR	1	
	L8304	G1CR22JA0020	INDUCTION COIL	1	
	L8305	G1CR22JA0020	INDUCTION COIL	1	
	L8306	G1CR39JA0020	INDUCTION COIL	1	PAVCA
	L8307	J0JHC0000045	CHIP INDUCTOR	1	
	L8308	J0JHC0000045	CHIP INDUCTOR	1	
	L8309	J0JHC0000045	CHIP INDUCTOR	1	
	L8310	J0JHC0000045	CHIP INDUCTOR	1	
	L8311	G1CR39JA0020	INDUCTION COIL	1	PAVCA
	L8312	G1CR39JA0020	INDUCTION COIL	1	PAVCA
	L8336	J0JCC0000364	CHIP INDUCTOR	1	
	L8500	J0JHC0000045	CHIP INDUCTOR	1	
	L8501	J0JHC0000045	CHIP INDUCTOR	1	
	L8502	J0JHC0000045	CHIP INDUCTOR	1	
	L8503	J0JHC0000045	CHIP INDUCTOR	1	
	L8505	J0JHC0000045	CHIP INDUCTOR	1	
	L9000	J0JHC0000078	CHIP INDUCTOR	1	
	L9001	J0JHC0000078	CHIP INDUCTOR	1	
	L9002	J0JHC0000078	CHIP INDUCTOR	1	
	L9003	J0JHC0000078	CHIP INDUCTOR	1	
	L9004	J0JHC0000078	CHIP INDUCTOR	1	
	L9005	J0JHC0000078	CHIP INDUCTOR	1	
	L9006	J0JHC0000078	CHIP INDUCTOR	1	
	L9007	J0JHC0000078	CHIP INDUCTOR	1	
	L9800	G1C2R2Z00007	INDUCTION COIL	1	
	L9801	G1C1R5Z00006	INDUCTION COIL	1	
	L9802	G1C2R2Z00007	INDUCTION COIL	1	
	PA2000	K5H5022A0023	FUSE	1	
	PA9800	K5H4022A0031	FUSE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	PA9900	K5H5022A0031	FUSE	1	
	PB30	K1KA05AA0193	5P CONNECTOR	1	
	PB31	K1KA03AA0192	3P CONNECTOR	1	
	PB32	K1KA03AA0192	3P CONNECTOR	1	
	PB36	K1KA03AA0192	3P CONNECTOR	1	
	PB37	K1KA03AA0192	3P CONNECTOR	1	
	PC2501	B3JB00000046	IC	1	
△	PCB	TNPH0736ADS	CIRCUIT BOARD A	1	PAVCA
△	PCB	TNPA4439AQS	CIRCUIT BOARD D	1	PAVCA
△	PCB	TNPA4243AKS	CIRCUIT BOARD PB	1	PAVCA
△	PCB	TNPA4536S	CIRCUIT BOARD S	1	PAVCA
△	PCB	TNPA4526S	CIRCUIT BOARD G	1	PAVCA
△	PCB	TNPA4603ADS	CIRCUIT BOARD GH	1	PAVCA
△	PCB	TNPA4519ACS	CIRCUIT BOARD GS	1	PAVCA
△	PCB	TNPA4525S	CIRCUIT BOARD K	1	PAVCA
△	PCB	TNPA4693ACS	CIRCUIT BOARD GL	1	PAVCA
	Q2041	2SD0601ARL	TRANSISTOR	1	
	Q2042	2SD0601ARL	TRANSISTOR	1	
	Q2301	2SB0709ARL	TRANSISTOR	1	
	Q2510	2SD0601ARL	TRANSISTOR	1	
	Q2511	2SD0601ARL	TRANSISTOR	1	
	Q3123	2SD0601ARL	TRANSISTOR	1	
	Q3124	2SD0601ARL	TRANSISTOR	1	
	Q3125	2SB0709ARL	TRANSISTOR	1	
	Q3801	2SD0601ARL	TRANSISTOR	1	
	Q3802	2SD0601ARL	TRANSISTOR	1	
	Q3804	2SD0601ARL	TRANSISTOR	1	
	Q4502	2SD0601ARL	TRANSISTOR	1	
	Q4503	2SD0601ARL	TRANSISTOR	1	
	Q4504	2SD0601ARL	TRANSISTOR	1	
	Q4505	2SD0601ARL	TRANSISTOR	1	
	Q4514	2SB0709ARL	TRANSISTOR	1	
	Q4515	2SB0709ARL	TRANSISTOR	1	
	Q4516	2SB0709ARL	TRANSISTOR	1	
	Q4517	2SB0709ARL	TRANSISTOR	1	
	Q4522	2SD0601ASL	TRANSISTOR	1	
	Q4523	2SD0601ASL	TRANSISTOR	1	
	Q4525	2SD0601ARL	TRANSISTOR	1	
	Q4526	2SD0601ARL	TRANSISTOR	1	
	Q4527	2SD0601ARL	TRANSISTOR	1	
	Q4528	2SB0709ARL	TRANSISTOR	1	
	Q4529	2SB0709ARL	TRANSISTOR	1	
	Q4800	2SD0601ARL	TRANSISTOR	1	
	Q4801	2SD0601ARL	TRANSISTOR	1	
	Q4802	B1CFNG000001	FET	1	
	Q4803	2SD0601ASL	TRANSISTOR	1	
	Q5301	B1MBEDA00015	FET	1	
	Q5302	B1MBEDA00015	FET	1	
	Q5600	B1MBEDA00015	FET	1	
	Q5601	B1MBDDA00003	FET	1	
	Q5602	B1MBDDA00003	FET	1	
	Q5603	2SD0601ARL	TRANSISTOR	1	
	Q5604	2SD0601ARL	TRANSISTOR	1	
	Q5605	2SB0709ARL	TRANSISTOR	1	
	Q5606	2SB0709ARL	TRANSISTOR	1	
	Q7700	2SB0709ARL	TRANSISTOR	1	
	Q7701	2SD0601ARL	TRANSISTOR	1	
	Q8300	2SB0709ARL	TRANSISTOR	1	
	Q8500	B1ADKC000002	TRANSISTOR	1	
	Q9010	2SD0601ARL	TRANSISTOR	1	
	Q9055	2SD0601ARL	TRANSISTOR	1	
	Q9056	2SD0601ARL	TRANSISTOR	1	
	Q9057	2SD0601ARL	TRANSISTOR	1	
	Q9058	2SD0601ARL	TRANSISTOR	1	
	Q9059	2SD0601ARL	TRANSISTOR	1	
	Q9060	2SD0601ARL	TRANSISTOR	1	
	Q9061	2SD0601ARL	TRANSISTOR	1	
	Q9805	2SD0601ARL	TRANSISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q9806	2SD0601ARL	TRANSISTOR	1	
	Q9807	B1MBDDA00003	FET	1	
	Q9808	B1MBDDA00015	FET	1	
	Q9809	B1MBDDA00003	FET	1	
	R851	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R852	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R856	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R857	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R859	ERJ6ENF2001V	M 2KOHM, 1/10W	1	
	R861	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R867	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R869	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R871	ERJ6ENF1302	M 13KOHM, 1/10W	1	
	R872	ERJ6ENF3900	M 390 OHM, 1/10W	1	
	R874	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
	R1112	ERJ2GEJ331	M 330 OHM, J, 0.063W	1	
	R1139	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R1143	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R1145	ERJ2GEJ821	M 820 OHM, J, 0.063W	1	
	R1148	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R1149	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R1150	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R1151	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R1152	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R1153	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R1154	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R1162	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R1163	ERJ2GEJ105	M 1MOHM, J, 0.063W	1	
	R1169	ERJ2GEJ683	M 68KOHM, J, 0.063W	1	
	R1170	ERJ2GEJ333	M 33KOHM, J, 0.063W	1	
	R1171	ERJ2GEJ683	M 68KOHM, J, 0.063W	1	
	R1172	ERJ2GEJ333	M 33KOHM, J, 0.063W	1	
	R1174	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R1175	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R1182	ERJ2GED273X	M 27KOHM, J, 0.063W	1	
	R1183	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R1184	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R1194	ERJ2GEJ683	M 68KOHM, J, 0.063W	1	
	R1196	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R1198	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R1200	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R1201	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R1203	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R1205	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R1206	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1207	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1208	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1209	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R1210	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1211	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1215	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1216	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1218	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1219	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1220	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1221	D1BB7151A055	M7.15KOHM, 1/10W	1	
	R1223	DOYAR0000007	M 0 OHM 1/4W	1	
	R1224	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1225	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1228	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1229	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1230	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1236	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1237	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1243	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1255	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1265	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R2058	ERJ2GEJ821	M 820 OHM, J,0.063W	1	
	R2059	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R2060	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2096	EXB28V220J	RESISTOR ARRAY	1	
	R2097	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R2098	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R2099	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2100	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2102	D0GB101JA041	M 100 OHM,J,1/16W	1	
	R2104	D1BB2001A055	M 2KOHM, 1/10W	1	
	R2105	D0GB101JA041	M 100 OHM,J,1/16W	1	
	R2110	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2111	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2113	D1BB1203A055	M 120KOHM, 1/10W	1	
	R2114	D1BB7502A055	M 75KOHM, 1/10W	1	
	R2115	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2116	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2117	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2118	D0GB101JA041	M 100 OHM,J,1/16W	1	
	R2119	D0GB101JA041	M 100 OHM,J,1/16W	1	
	R2122	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/8W	1	
	R2124	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/8W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R2126	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/8W	1	
	R2128	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/8W	1	
	R2138	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2150	D1BB2802A055	M 28KOHM, 1/10W	1	
	R2151	D1BB2802A055	M 28KOHM, 1/10W	1	
	R2152	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2162	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2163	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2164	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2184	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R2271	EXB28V220J	RESISTOR ARRAY	1	
	R2301	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R2302	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R2305	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R2308	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/8W	1	
	R2311	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/8W	1	
	R2313	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/8W	1	
	R2315	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/8W	1	
	R2325	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2330	ERJ2GEJ392	M 3.9KOHM, J,0.063W	1	
	R2331	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
	R2513	D1BB5601A055	M 5.6KOHM, 1/10W	1	
	R2516	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R2517	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R2520	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	
	R2524	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R2525	D1BB8200A055	M 820 OHM, 1/10W	1	PAVCA
	R2542	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R2557	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
	R3058	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3059	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3060	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3061	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R3062	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3063	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3064	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R3065	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3066	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R3067	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3068	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3070	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3071	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3074	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3075	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3076	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3077	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3078	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3079	ERJ2GEJ221	M 220 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3080	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3081	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3082	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3083	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3084	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3085	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3086	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3087	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3088	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3089	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3090	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3091	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3092	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3095	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3096	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3097	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3098	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3099	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3107	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3123	ERJ2GEJ182	M 1.8KOHM, J,0.063W	1	
	R3124	ERJ2GEJ182	M 1.8KOHM, J,0.063W	1	
	R3145	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R3146	ERJ2GEJ184	M 180KOHM, J,0.063W	1	
	R3147	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R3148	ERJ2GEJ184	M 180KOHM, J,0.063W	1	
	R3149	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R3150	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R3151	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R3152	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3153	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3154	ERJ2GEJ274	M 270KOHM, J,0.063W	1	
	R3188	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3189	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R3190	D0GB393JA041	M 39KOHM, J,1/16W	1	
	R3191	D0GB393JA041	M 39KOHM, J,1/16W	1	
	R3192	D0GB393JA041	M 39KOHM, J,1/16W	1	
	R3193	D0GB393JA041	M 39KOHM, J,1/16W	1	
	R3194	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R3195	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3196	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3198	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R3199	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R3202	D0GB393JA041	M 39KOHM, J,1/16W	1	
	R3203	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R3204	D0GB393JA041	M 39KOHM, J,1/16W	1	
	R3206	D0GB393JA041	M 39KOHM, J,1/16W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3208	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R3209	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R3210	D0GB393JA041	M 39KOHM, J,1/16W	1	
	R3211	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R3212	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R3301	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R3302	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R3303	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R3305	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R3306	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R3307	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R3310	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R3311	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R3313	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R3316	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R3318	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R3319	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R3570	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R3571	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R3632	D0YAR0000007	M 0 OHM 1/4W	1	
	R3633	ERJ2GEJ153	M 15KOHM, J,0.063W	1	
	R3634	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R3635	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R3636	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R3637	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R3716	ERJ6GEYJ393V	M 39KOHM, J,1/10W	1	
	R3717	ERJ6GEYJ393V	M 39KOHM, J,1/10W	1	
	R3721	D0GD103JA036	M 10KOHM, J,0.25W	1	
	R3750	ERJ6ENF1432	M14.3KOHM, 1/10W	1	
	R3751	ERJ6ENF6651	M6.65KOHM, 1/10W	1	
	R3752	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
	R3753	ERJ6ENF1621	M1.62KOHM, 1/10W	1	
	R3754	ERJ6ENF2321	M2.32KOHM, 1/10W	1	
	R3756	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R3758	ERJ6ENF3161	M3.16KOHM, 1/10W	1	
	R3801	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3802	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3804	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3805	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3806	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3807	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3808	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3809	ERJ2GEJ122	M 1.2KOHM, J,0.063W	1	
	R3810	ERJ2GEJ122	M 1.2KOHM, J,0.063W	1	
	R3811	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R3812	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3814	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3815	D0YAR0000007	M 0 OHM 1/4W	1	
	R3816	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R3818	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3821	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R3822	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3832	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3834	D1BB49R90002	M 49 OHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3840	ERJ2GEJ100	M 10 OHM, J, 0.063W	1	
	R3841	ERJ2GEJ100	M 10 OHM, J, 0.063W	1	
	R3845	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R3847	D0YAR0000007	M 0 OHM 1/4W	1	
	R4122	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4158	ERJ3GEYD153V	M 15KOHM, J, 1/16W	1	
	R4502	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4503	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4524	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4526	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4527	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4528	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4530	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4535	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R4536	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R4538	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4539	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4540	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4541	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4542	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4543	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4546	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4547	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4548	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4549	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4552	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4560	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R4567	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R4570	D0YAR0000007	M 0 OHM 1/4W	1	
	R4571	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R4572	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R4573	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R4575	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4578	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4585	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4586	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4587	D1BB60400001	M 604 OHM, 1/10W	1	
	R4588	D1BB8060A055	M 806 OHM, 1/10W	1	
	R4589	D1BB8060A055	M 806 OHM, 1/10W	1	
	R4590	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4591	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4592	D1BB8060A055	M 806 OHM, 1/10W	1	
	R4593	D1BB2201A055	M 2.2KOHM, 1/10W	1	
	R4596	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4597	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4598	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4600	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4601	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4603	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4605	EXB28V151J	RESISTOR ARRAY	1	
	R4606	D1BB9101A055	M 9.1KOHM, 1/10W	1	
	R4607	EXB28V151J	RESISTOR ARRAY	1	
	R4608	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4609	EXB28V151J	RESISTOR ARRAY	1	
	R4611	D1BB5601A055	M 5.6KOHM, 1/10W	1	
	R4617	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4618	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4622	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4624	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4625	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4626	D1BB2200A055	M 220 OHM, 1/10W	1	
	R4627	D1BB2200A055	M 220 OHM, 1/10W	1	
	R4631	D1BB4990A055	M 499 OHM, 1/10W	1	
	R4634	D1BB2200A055	M 220 OHM, 1/10W	1	
	R4635	EXB28V151J	RESISTOR ARRAY	1	
	R4636	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4639	EXB28V151J	RESISTOR ARRAY	1	
	R4640	EXB28V151J	RESISTOR ARRAY	1	
	R4641	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4642	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4643	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4647	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R4648	EXB28V330J	RESISTOR ARRAY	1	
	R4649	EXB28V151J	RESISTOR ARRAY	1	
	R4650	ERJ2GEJ151	M 150 OHM, J, 0.063W	1	
	R4651	ERJ2GEJ151	M 150 OHM, J, 0.063W	1	
	R4652	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4665	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4666	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4678	EXB28V151J	RESISTOR ARRAY	1	
	R4679	EXB28V151J	RESISTOR ARRAY	1	
	R4686	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4689	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4690	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R4691	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4694	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R4699	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4801	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R4802	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R4807	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R4810	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R4811	D1BB1003A055	M 100KOHM, 1/10W	1	
	R4812	D1BB3401A055	M 3.4KOHM, 1/10W	1	
	R4815	ERJ6GEYJ681	M 680 OHM, J, 1/10W	1	
	R4816	ERJ2GEJ331	M 330 OHM, J, 0.063W	1	
	R4821	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4851	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R4852	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4853	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4854	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4855	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4856	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4859	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4861	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4862	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4863	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4864	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4865	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4866	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4867	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4868	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4869	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4870	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4871	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4872	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4873	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4874	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4875	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4876	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4877	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4878	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5024	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5025	D1BB2700A055	M 270 OHM, 1/10W	1	
	R5026	D1BB2700A055	M 270 OHM, 1/10W	1	
	R5049	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5050	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5051	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5052	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5053	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5054	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5055	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5056	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5057	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5058	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5059	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5060	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5061	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5062	ERJ2GEJ470	M 47 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5063	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5064	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5065	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5066	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5067	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R5068	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5070	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5071	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5074	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5075	D1BA75R0A014	M0.75KOHM, 1/10W	1	
	R5076	ERJ2GEJ301	M 300 OHM, J,0.063W	1	
	R5077	D0YAR0000007	M 0 OHM 1/4W	1	
	R5078	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R5079	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5080	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5082	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5088	ERJ3GEJ680	M 68 OHM,J,1/16W	1	
	R5089	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5204	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5205	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5206	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5207	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5208	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R5209	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R5224	D0YAR0000007	M 0 OHM 1/4W	1	
	R5227	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R5229	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R5233	EXB2HV560JV	RESISTOR ARRAY	1	
	R5234	EXB2HV560JV	RESISTOR ARRAY	1	
	R5235	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5236	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5237	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5238	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5239	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5240	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5241	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5243	D0YAR0000007	M 0 OHM 1/4W	1	
	R5247	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5248	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5249	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5250	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R5251	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R5252	ERJ2GEJ680	M 68 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5253	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5254	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5255	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5257	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5259	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5260	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R5261	ERJ2GEJ560X	M 56 OHM, J, 0.063W	1	
	R5265	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5314	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R5316	D0YAR0000007	M 0 OHM 1/4W	1	
	R5320	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5321	D1BB3402A055	M 34KOHM, 1/10W	1	
	R5322	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R5323	D1BB2802A055	M 28KOHM, 1/10W	1	
	R5329	D1BB2802A055	M 28KOHM, 1/10W	1	
	R5330	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R5331	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5332	D1BB3002A055	M 30KOHM, 1/10W	1	
	R5333	D1BB3242A055	M32.4KOHM, 1/10W	1	
	R5334	D1BB3902A055	M 39KOHM, 1/10W	1	PAVCA
	R5337	D0YAR0000007	M 0 OHM 1/4W	1	
	R5600	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5604	D1BB2802A055	M 28KOHM, 1/10W	1	
	R5605	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5606	D0YAR0000007	M 0 OHM 1/4W	1	
	R5607	D0YAR0000007	M 0 OHM 1/4W	1	
	R5610	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R5611	D1BB1272A055	M12.7KOHM, 1/10W	1	
	R5612	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5620	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R5621	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5622	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R5623	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5625	D0YAR0000007	M 0 OHM 1/4W	1	
	R5626	D0YAR0000007	M 0 OHM 1/4W	1	
	R5627	D0YAR0000007	M 0 OHM 1/4W	1	
	R5628	D0YAR0000007	M 0 OHM 1/4W	1	
	R5629	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R5630	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5631	D1BB3002A055	M 30KOHM, 1/10W	1	
	R5632	D1BB1272A055	M12.7KOHM, 1/10W	1	
	R5633	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5634	D1BB2802A055	M 28KOHM, 1/10W	1	
	R5635	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R5636	ERJ2GEJ683	M 68KOHM, J, 0.063W	1	
	R5637	D0YAR0000007	M 0 OHM 1/4W	1	
	R5638	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5641	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5644	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R5645	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5646	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5647	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5649	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5650	ERJ2GEJ471	M 470 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5651	D0YAR0000007	M 0 OHM 1/4W	1	
	R5652	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R5653	ERJ2GEJ105	M 1MOHM, J, 0.063W	1	
	R5654	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R5655	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5656	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R5657	ERJ2GEJ681	M 680 OHM, J, 0.063W	1	
	R5658	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
	R5660	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
	R5663	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
	R5664	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R5665	ERJ2RHD682X	M 6.8KOHM, J, 2W	1	
	R5667	D0YAR0000007	M 0 OHM 1/4W	1	
	R5668	D0YAR0000007	M 0 OHM 1/4W	1	
	R5669	D1BB1002A055	M 10KOHM, 1/10W	1	
	R5670	D1BB1002A055	M 10KOHM, 1/10W	1	
	R5671	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R5672	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R5673	D1BB4532A055	M4.53KOHM, 1/10W	1	
	R5674	D1BB8872A055	M8.87KOHM, 1/10W	1	
	R5675	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5676	ERJ2GEJ203X	M 20KOHM, J, 0.063W	1	
	R5677	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R5678	ERJ2GED563X	M 56KOHM, J, 0.063W	1	
	R5679	ERJ2GED563X	M 56KOHM, J, 0.063W	1	
	R5747	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5748	ERJ2GEJ123	M 12KOHM, J, 0.063W	1	
	R5749	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	R5762	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R7701	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7702	ERJ3EKF75R0	M 0.75HM, 1/16W	1	
	R7703	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
	R7704	D0GB102JA041	M 1KOHM, J, 1/16W	1	
	R7705	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7706	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
	R7708	D0GB104JA041	M 100KOHM J 1/16W	1	
	R7709	D0GB104JA041	M 100KOHM J 1/16W	1	
	R7710	D0GB102JA041	M 1KOHM, J, 1/16W	1	
	R7711	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
	R7712	D0GB104JA041	M 100KOHM J 1/16W	1	
	R7713	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
	R7714	D1BB1202A055	M 12KOHM, 1/10W	1	
	R7715	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
	R7716	D0GB105JA041	M 1M OHM F 1/16W	1	
	R7717	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7718	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7719	D0GBR00Z0002	M 0 OHM J 1/16W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R7725	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7726	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7727	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7733	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7734	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7735	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7737	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7738	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7742	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7744	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7749	J0JCC0000241	CHIP INDUCTOR	1	
	R7750	J0JCC0000241	CHIP INDUCTOR	1	
	R7751	J0JCC0000241	CHIP INDUCTOR	1	
	R7754	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7777	D1BB3402A055	M 34KOHM, 1/10W	1	
	R7778	D1BB1002A055	M 10KOHM, 1/10W	1	
	R7779	EXB38VR000V	RESISTOR ARRAY	1	
	R7781	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7782	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7800	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R8001	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R8002	D1BB2402A055	M 24KOHM, 1/10W	1	
	R8003	D1BB1002A055	M 10KOHM, 1/10W	1	
	R8004	D1BB5601A055	M 5.6KOHM, 1/10W	1	
	R8005	ERJ2GEJ181	M 180 OHM, J,0.063W	1	
	R8006	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8007	ERJ2GEJ181	M 180 OHM, J,0.063W	1	
	R8008	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8016	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R8017	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R8102	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8103	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8105	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8106	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8107	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8108	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8109	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R8110	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8111	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8112	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8126	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8127	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8134	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8135	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8136	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8143	D1BB2700A055	M 270 OHM, 1/10W	1	
	R8144	D1BB2700A055	M 270 OHM, 1/10W	1	
	R8145	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8179	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8180	ERJ3GEYJ301	M 300 OHM,J,1/16W	1	
	R8181	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8182	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8183	D1BB75R0A055	M 75 OHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8184	ERJ3GEYJ301	M 300 OHM,J,1/16W	1	
	R8185	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8186	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8187	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8188	D1BB2700A055	M 270 OHM, 1/10W	1	
	R8189	D1BB2700A055	M 270 OHM, 1/10W	1	
	R8196	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8197	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8198	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8201	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8202	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8203	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8204	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8205	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8206	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8207	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8208	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8209	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8210	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8211	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8212	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8213	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8216	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8217	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8218	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8219	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8220	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8221	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8222	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8223	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8224	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8225	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8226	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8227	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8228	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8229	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8230	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8231	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8232	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8233	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8234	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8235	ERJ2GEJ470	M 47 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8236	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8237	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8240	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8241	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8242	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8243	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8244	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8245	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8246	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8247	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8248	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8302	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8303	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8304	D0YAR0000007	M 0 OHM 1/4W	1	
	R8305	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8306	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8307	ERJ2GEJ562	M 5.6KOHM, J,0.063W	1	
	R8308	ERJ2GEJ562	M 5.6KOHM, J,0.063W	1	
	R8309	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8311	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8313	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R8314	D1BB1202A055	M 12KOHM, 1/10W	1	
	R8315	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R8316	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8317	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8318	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R8319	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R8320	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R8321	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8323	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8324	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8325	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8326	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8327	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8331	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R8333	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R8334	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R8335	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8505	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8506	EXB2HV100JV	RESISTOR ARRAY	1	
	R8507	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R8508	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8509	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8510	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8511	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8512	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8513	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8514	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8515	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8517	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8518	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8526	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8528	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8529	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8566	D0YAR0000007	M 0 OHM 1/4W	1	
	R8567	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8568	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8572	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8576	EXB2HV560JV	RESISTOR ARRAY	1	
	R8582	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8583	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8584	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8585	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8586	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8587	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R8588	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8597	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8598	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8599	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8600	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8601	D0YAR0000007	M 0 OHM 1/4W	1	
	R8604	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8605	ERJ3EKF5361	M 5.36KOHM, 1/16W	1	
	R8606	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8607	D0YAR0000007	M 0 OHM 1/4W	1	
	R8608	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8609	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R8610	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8611	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8612	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8613	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8614	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8616	D0YAR0000007	M 0 OHM 1/4W	1	
	R8617	D1BA49R9A014	M 49.9 OHM, 1/10W	1	
	R8618	D1BA49R9A014	M 49.9 OHM, 1/10W	1	
	R8619	D1BA49R9A014	M 49.9 OHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8620	D1BA49R9A014	M 49.9 OHM, 1/10W	1	
	R8621	D0YAR0000007	M 0 OHM 1/4W	1	
	R8622	D0YAR0000007	M 0 OHM 1/4W	1	
	R8623	D0YAR0000007	M 0 OHM 1/4W	1	
	R8624	D0YAR0000007	M 0 OHM 1/4W	1	
	R8625	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8626	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8627	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8628	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8629	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8630	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8631	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8632	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8633	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8634	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8635	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8636	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8637	D1HG1218A002	NETWORK RESISTER	1	
	R8638	D1HG1218A002	NETWORK RESISTER	1	
	R8639	D1HG1218A002	NETWORK RESISTER	1	
	R8640	D1HG1218A002	NETWORK RESISTER	1	
	R8641	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8642	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8643	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8644	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8645	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8646	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8647	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8648	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8649	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8650	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8651	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8652	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8653	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8654	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8655	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8656	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R8657	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8658	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8659	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8660	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8661	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8662	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8663	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8664	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8665	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8667	ERJ2GEJ153	M 15KOHM, J,0.063W	1	
	R8668	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8671	D1BA1601A026	M 1.6KOHM, 1/10W	1	
	R8672	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8673	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8674	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8675	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R8676	ERJ2GEJ153	M 15KOHM, J,0.063W	1	
	R8677	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8678	D0YAR0000007	M 0 OHM 1/4W	1	
	R8681	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8682	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8683	EXB2HV101J	RESISTOR ARRAY	1	
	R8684	EXB2HV101J	RESISTOR ARRAY	1	
	R8685	EXB2HV101J	RESISTOR ARRAY	1	
	R8687	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8688	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8689	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8690	EXB2HV330JV	RESISTOR ARRAY	1	
	R8691	EXB2HV330JV	RESISTOR ARRAY	1	
	R8693	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8696	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8697	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8699	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8701	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8702	D0YAR0000007	M 0 OHM 1/4W	1	
	R8703	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8705	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8706	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8707	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8711	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8712	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8713	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8714	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8715	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8716	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8717	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8718	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8719	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8720	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R8721	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R8722	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8723	D1BB82R0A055	M 82 OHM, 1/10W	1	PAVCA
	R8724	D1BB82R0A055	M 82 OHM, 1/10W	1	PAVCA
	R8725	D1BB82R0A055	M 82 OHM, 1/10W	1	PAVCA
	R8726	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8727	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8728	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8729	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8730	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8731	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8732	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8733	EXB2HV103JV	RESISTOR ARRAY	1	
	R8734	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8735	EXB2HV103JV	RESISTOR ARRAY	1	
	R8736	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8737	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8738	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8739	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8740	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8741	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8742	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8743	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8744	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8745	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8746	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8747	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8748	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R8749	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8750	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8751	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R8752	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8753	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8756	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8759	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8760	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8762	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8763	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R8770	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8772	EXB2HV103JV	RESISTOR ARRAY	1	
	R8773	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8775	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8777	D0YAR0000007	M 0 OHM 1/4W	1	
	R8778	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8779	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8780	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8781	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8782	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8783	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8784	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8785	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8786	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8787	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8789	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8790	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8791	EXB2HV560JV	RESISTOR ARRAY	1	
	R8792	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8798	EXB2HV103JV	RESISTOR ARRAY	1	
	R8799	EXB2HV103JV	RESISTOR ARRAY	1	
	R8800	EXB2HV103JV	RESISTOR ARRAY	1	
	R8801	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8802	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8803	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8804	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8805	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8806	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8807	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8808	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8809	D0YAR0000007	M 0 OHM 1/4W	1	
	R8810	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8811	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8812	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8813	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8814	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8815	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8816	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8817	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8818	EXB2HV103JV	RESISTOR ARRAY	1	
	R8819	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8820	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8821	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8822	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8823	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8825	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8826	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8827	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8830	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8831	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8835	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8846	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R8847	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8858	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8859	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8860	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8861	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9069	EXB2HV220JV	RESISTOR ARRAY	1	
	R9070	EXB2HV220JV	RESISTOR ARRAY	1	
	R9071	EXB2HV220JV	RESISTOR ARRAY	1	
	R9072	EXB2HV220JV	RESISTOR ARRAY	1	
	R9073	EXB2HV220JV	RESISTOR ARRAY	1	
	R9074	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9075	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9076	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9077	EXB38V470J	RESISTOR ARRAY	1	
	R9078	EXB38V470J	RESISTOR ARRAY	1	
	R9079	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9080	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9081	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9086	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9087	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9088	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9089	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9092	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9093	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9094	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9095	EXB2HV220JV	RESISTOR ARRAY	1	
	R9096	EXB2HV220JV	RESISTOR ARRAY	1	
	R9097	EXB2HV220JV	RESISTOR ARRAY	1	
	R9098	EXB2HV220JV	RESISTOR ARRAY	1	
	R9099	EXB2HV220JV	RESISTOR ARRAY	1	
	R9100	EXB2HV220JV	RESISTOR ARRAY	1	
	R9101	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9103	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9105	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9106	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9107	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	1	
	R9108	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9109	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9110	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9111	EXB2HV220JV	RESISTOR ARRAY	1	
	R9112	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9113	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9114	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9115	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9116	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9117	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9118	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9119	EXB38V470J	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9120	EXB2HV103JV	RESISTOR ARRAY	1	
	R9121	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9122	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	1	
	R9123	EXB2HV470JV	RESISTOR ARRAY	1	
	R9124	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9125	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9126	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9127	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R9129	ERJ2GEJ683	M 68KOHM, J, 0.063W	1	
	R9130	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9131	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9132	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9133	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R9134	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R9135	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9136	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9137	EXB2HV220JV	RESISTOR ARRAY	1	
	R9138	EXB2HV220JV	RESISTOR ARRAY	1	
	R9139	EXB2HV220JV	RESISTOR ARRAY	1	
	R9140	EXB2HV220JV	RESISTOR ARRAY	1	
	R9141	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9142	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9143	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9144	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R9145	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9146	EXB2HV220JV	RESISTOR ARRAY	1	
	R9147	EXB2HV220JV	RESISTOR ARRAY	1	
	R9148	EXB38V680J	RESISTOR ARRAY	1	
	R9149	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9150	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9151	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9154	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9155	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9156	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R9157	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9158	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9159	ERJ2GEJ393	M 39KOHM, J, 0.063W	1	
	R9160	ERJ2GEJ393	M 39KOHM, J, 0.063W	1	
	R9161	ERJ2GEJ393	M 39KOHM, J, 0.063W	1	
	R9162	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9163	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9164	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9166	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9167	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9168	D0GDR00Z0002	M 0 OHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9170	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9171	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9172	D0YAR0000007	M 0 OHM 1/4W	1	
	R9174	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9175	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9177	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9178	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9179	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9180	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9181	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9182	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9185	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R9186	ERJ2GEJ333	M 33KOHM, J, 0.063W	1	
	R9187	ERJ2GED563X	M 56KOHM, J, 0.063W	1	
	R9188	ERJ2GEJ243	M 24KOHM, J, 0.063W	1	
	R9189	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9190	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9191	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9192	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9193	EXB2HV220JV	RESISTOR ARRAY	1	
	R9195	EXB2HV220JV	RESISTOR ARRAY	1	
	R9197	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9198	D0YAR0000007	M 0 OHM 1/4W	1	
	R9199	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9200	ERJ2GEJ100	M 10 OHM, J, 0.063W	1	
	R9201	ERJ2GEJ100	M 10 OHM, J, 0.063W	1	
	R9202	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9203	D0YAR0000007	M 0 OHM 1/4W	1	
	R9204	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
	R9205	ERJ2GEJ331	M 330 OHM, J, 0.063W	1	
	R9206	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9207	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9208	EXB2HV220JV	RESISTOR ARRAY	1	
	R9209	EXB2HV220JV	RESISTOR ARRAY	1	
	R9210	EXB2HV220JV	RESISTOR ARRAY	1	
	R9211	EXB2HV220JV	RESISTOR ARRAY	1	
	R9212	EXB2HV470JV	RESISTOR ARRAY	1	
	R9213	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9214	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9215	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9216	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R9217	ERJ2GEJ680	M 68 OHM, J, 0.063W	1	
	R9218	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9219	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9223	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R9224	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9225	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R9226	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9229	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9230	EXB38V470J	RESISTOR ARRAY	1	
	R9231	D0YAR0000007	M 0 OHM 1/4W	1	
	R9232	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9233	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
	R9234	EXB2HV470JV	RESISTOR ARRAY	1	
	R9235	EXB2HV470JV	RESISTOR ARRAY	1	
	R9236	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9237	EXB38V470J	RESISTOR ARRAY	1	
	R9238	ERJ2GEJ151	M 150 OHM, J, 0.063W	1	
	R9245	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9246	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9247	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9248	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9249	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9250	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9251	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9252	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9253	EXB2HV103JV	RESISTOR ARRAY	1	
	R9254	EXB2HV103JV	RESISTOR ARRAY	1	
	R9255	EXB2HV103JV	RESISTOR ARRAY	1	
	R9256	EXB38V470J	RESISTOR ARRAY	1	
	R9257	EXB38V470J	RESISTOR ARRAY	1	
	R9258	EXB38V470J	RESISTOR ARRAY	1	
	R9259	EXB38V470J	RESISTOR ARRAY	1	
	R9260	EXB38V470J	RESISTOR ARRAY	1	
	R9261	EXB38V470J	RESISTOR ARRAY	1	
	R9262	EXB38V470J	RESISTOR ARRAY	1	
	R9263	EXB38V470J	RESISTOR ARRAY	1	
	R9264	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9265	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9266	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9267	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9270	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9271	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9272	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9273	ERJ2GEJ470	M 47 OHM, J, 0.063W	1	
	R9274	EXB2HV151J	RESISTOR ARRAY	1	
	R9275	EXB2HV151J	RESISTOR ARRAY	1	
	R9276	EXB2HV151J	RESISTOR ARRAY	1	
	R9277	EXB2HV151J	RESISTOR ARRAY	1	
	R9278	D0YAR0000007	M 0 OHM 1/4W	1	
	R9279	D0YAR0000007	M 0 OHM 1/4W	1	
	R9280	EXB2HV103JV	RESISTOR ARRAY	1	
	R9281	EXB2HV103JV	RESISTOR ARRAY	1	
	R9282	EXB2HV103JV	RESISTOR ARRAY	1	
	R9283	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9286	D0YAR0000007	M 0 OHM 1/4W	1	
	R9287	D0YAR0000007	M 0 OHM 1/4W	1	
	R9288	D0YAR0000007	M 0 OHM 1/4W	1	
	R9290	EXB2HV103JV	RESISTOR ARRAY	1	
	R9291	EXB2HV103JV	RESISTOR ARRAY	1	
	R9294	EXB2HV103JV	RESISTOR ARRAY	1	
	R9295	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9296	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
	R9297	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9298	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9299	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9300	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9301	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9302	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9303	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9304	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9308	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9309	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9310	EXB38V103JV	RESISTOR ARRAY	1	
	R9311	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9312	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R9315	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9316	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9318	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9320	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9322	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9325	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9327	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9333	EXB38V103JV	RESISTOR ARRAY	1	
	R9334	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9335	EXB2HV103JV	RESISTOR ARRAY	1	
	R9337	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9341	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9342	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9343	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9344	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9345	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9348	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9350	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9351	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9352	EXB2HV470JV	RESISTOR ARRAY	1	
	R9353	EXB38V470J	RESISTOR ARRAY	1	
	R9354	EXB2HV103JV	RESISTOR ARRAY	1	
	R9355	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9358	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9362	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9385	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9578	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9599	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9600	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9611	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9824	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9825	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9826	ERJ2GEJ101	M 100 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9839	EXB38V101JV	RESISTOR ARRAY	1	
	R9840	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9846	EXB2HV103JV	RESISTOR ARRAY	1	
	R9847	EXB2HV103JV	RESISTOR ARRAY	1	
	R9848	EXB2HV470JV	RESISTOR ARRAY	1	
	R9849	EXB2HV470JV	RESISTOR ARRAY	1	
	R9854	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9859	EXB38V101JV	RESISTOR ARRAY	1	
	R9868	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9869	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9870	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9871	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9878	D1BB1502A055	M 15KOHM, 1/10W	1	
	R9879	D1BB1302A055	M 13KOHM, 1/10W	1	
	R9886	D1BB4702A055	M 47KOHM, 1/10W	1	
	R9887	D1BB5102A055	M 51KOHM, 1/10W	1	
	R9888	D1BB1502A055	M 15KOHM, 1/10W	1	
	R9889	D1BB1822A055	M18.2KOHM, 1/10W	1	
	R9890	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R9891	D1BB1272A055	M12.7KOHM, 1/10W	1	
	R9892	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9893	D1BB4302A055	M 43KOHM, 1/10W	1	
	R9894	D1BB2002A055	M 20KOHM, 1/10W	1	
	R9895	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9896	D1BB1822A055	M18.2KOHM, 1/10W	1	
	R9897	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R9901	D0YAR0000007	M 0 OHM 1/4W	1	
	R9905	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9907	ERJ2GEJ151	M 150 OHM, J,0.063W	1	
	R9936	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9937	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9938	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9939	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9940	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9944	EXB38V470J	RESISTOR ARRAY	1	
	R9945	EXB38V470J	RESISTOR ARRAY	1	
	R9946	EXB38V470J	RESISTOR ARRAY	1	
	R9947	EXB38V470J	RESISTOR ARRAY	1	
	R9948	EXB38V470J	RESISTOR ARRAY	1	
	R9949	EXB38V470J	RESISTOR ARRAY	1	
	R9950	EXB38V470J	RESISTOR ARRAY	1	
	R9951	EXB38V470J	RESISTOR ARRAY	1	
	R9952	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9953	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9954	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9955	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9966	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R9969	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9972	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9973	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9974	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9975	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9980	D0YAR0000007	M 0 OHM 1/4W	1	
	RM2501	PNA4701M07TV	REMOCON RECEIVER	1	
	S2	K1KA02BA0061	2P CONNECTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	SW2500	K0F122A00172	SWITCH REMOTE CONTROL	1	
	SW3751	EVQPC105K	SWITCH	1	
	SW3753	EVQPC105K	SWITCH	1	
	SW3754	EVQPC105K	SWITCH	1	
	SW3755	EVQPC105K	SWITCH	1	
	SW3756	EVQPC105K	SWITCH	1	
	SW3757	EVQPC105K	SWITCH	1	
	SW3758	EVQPC105K	SWITCH	1	
△	TU8300	ENGE6608KF	TUNER	1	PAVCA
	X1100	H0J100500035	CRYSTAL	1	
	X2010	H0J245500089	CRYSTAL	1	
	X5200	H0J270500087	CRYSTAL	1	
	X7700	H0J240500037	CRYSTAL	1	
	X8101	H0J270500061	CRYSTAL	1	
	X8300	H0J250500079	CRYSTAL	1	PAVCA
	X9000	H2D100500004	CRYSTAL	1	
	X9200	H0J200500076	CRYSTAL	1	
	ZA3701	K4CZ01000027	AV TERMINAL	1	
	ZA3702	K4CZ01000027	AV TERMINAL	1	
	ZA3703	K4CZ01000027	AV TERMINAL	1	
	ZA3801	K4AD01D00005	TERMINAL	1	
	ZA3802	K4AD01D00005	TERMINAL	1	
	ZA4800	K4AZ01D00004	TERMINAL	1	
	ZA4801	K4AZ01D00004	TERMINAL	1	
	ZA4802	K4AZ01D00004	TERMINAL	1	
	ZA4803	K4AZ01D00004	TERMINAL	1	
	ZA4805	K4AZ01D00004	TERMINAL	1	
	ZA4806	K4AZ01D00004	TERMINAL	1	
	ZA4807	K4AZ01D00004	TERMINAL	1	
	ZA4808	K4AZ01D00004	TERMINAL	1	
	ZA9000	K4CD01000011	AV TERMINAL	1	
	C10	K1MN20BA0231	20P CONNECTOR	1	
	C11	K1MN68BA0266	68P CONNECTOR	1	
	C20	K1MN20BA0266	20P CONNECTOR	1	
	C21	K1MN68BA0266	68P CONNECTOR	1	
	C22	K1MN68BA0266	68P CONNECTOR	1	
	C23	K1MN68BA0266	68P CONNECTOR	1	
	C32	K1KA04AA0728	4P CONNECTOR	1	
	C33	K1MN68BA0266	68P CONNECTOR	1	
	C41	K1MN80BA0076	80P CONNECTOR	1	
	C43	K1KA10A00416	10P CONNECTOR	1	
	C45	K1KA04AA0728	4P CONNECTOR	1	
	C50	K1MN20BA0266	20P CONNECTOR	1	
	C51	K1MN80BA0076	80P CONNECTOR	1	
	C52	K1MN68BA0266	68P CONNECTOR	1	
	C53	K1MN68BA0266	68P CONNECTOR	1	
	C60	K1MN20BA0231	20P CONNECTOR	1	
	C61	K1MN68BA0266	68P CONNECTOR	1	
	C14352	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14356	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14360	F1L2E104A028	E 1000UF, 25V	1	
	C14361	F1L2E104A028	E 1000UF, 25V	1	
	C14364	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14368	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14369	FLG1H102A730	C 1000UF, 50V	1	
	C14370	F1L2E104A028	E 1000UF, 25V	1	
	C14376	F1L2E104A028	E 1000UF, 25V	1	
	C14377	F1L2E104A028	E 1000UF, 25V	1	
	C14384	F1L2E104A028	E 1000UF, 25V	1	
	C14385	F1L2E104A028	E 1000UF, 25V	1	
	C14901	FLG1H102A730	C 1000UF, 50V	1	
	C14902	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14904	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14906	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14908	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14910	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14912	FLJ1C1050030	C 1UF, Z, 16V	1	
	C14920	F1L2E104A028	E 1000UF, 25V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C14923	F1L2E104A028	E 1000UF, 25V	1	
	C14924	F1L2E104A028	E 1000UF, 25V	1	
	C14925	F1L2E104A028	E 1000UF, 25V	1	
	C14927	F1L2E104A028	E 1000UF, 25V	1	
	C14929	F1L2E104A028	E 1000UF, 25V	1	
	C14930	F1L2E104A028	E 1000UF, 25V	1	
	C14931	F1G1H102A730	C 1000UF, 50V	1	
	C14934	F1L2E104A028	E 1000UF, 25V	1	
	C14936	F1G1H471A731	C 470UF, 50V	1	
	C14937	F1G1H471A731	C 470UF, 50V	1	
	C14938	F1G1H471A731	C 470UF, 50V	1	
	C14939	F1G1H471A731	C 470UF, 50V	1	
	C14940	F1G1H102A730	C 1000UF, 50V	1	
	C14941	F1G1H471A731	C 470UF, 50V	1	
	C14942	F1G1H471A731	C 470UF, 50V	1	
	C14943	F1L1E4750004	C 4.7UF, 25V	1	
	C14945	F1G1H101A731	C 100PF, K, 50V	1	
	C14950	F1G1H471A731	C 470UF, 50V	1	
	C14952	F1J1C1050030	C 1UF, Z, 16V	1	
	C14955	F1J1C1050030	C 1UF, Z, 16V	1	
	C14957	F1J1C1050030	C 1UF, Z, 16V	1	
	C14958	F1J1C1050030	C 1UF, Z, 16V	1	
	C14961	F1J1C1050030	C 1UF, Z, 16V	1	
	C14963	F1J1C1050030	C 1UF, Z, 16V	1	
	C14969	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C14970	F1G1H471A731	C 470UF, 50V	1	
	C14971	F1G1H471A731	C 470UF, 50V	1	
	C14972	F1G1H471A731	C 470UF, 50V	1	
	C14973	F1G1H102A730	C 1000UF, 50V	1	
	C14974	F1L2E104A028	E 1000UF, 25V	1	
	C14976	F1G1H102A730	C 1000UF, 50V	1	
	C14979	F1L2E104A028	E 1000UF, 25V	1	
	C14980	F1L2E104A028	E 1000UF, 25V	1	
	C14981	F1G1H471A731	C 470UF, 50V	1	
	C14984	F1L2E104A028	E 1000UF, 25V	1	
	C14985	F1L2E104A028	E 1000UF, 25V	1	
	C14987	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C14988	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C14989	F1G1H471A731	C 470UF, 50V	1	
	C14990	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C14992	F1H1C105A008	C 1UF, K, 16V	1	
	C16003	F1L2J562A022	C 5600UF, K, 6.3V	1	
	C16011	F2A2T251A004	E 250UF, 220V	1	
	C16012	F2A2T251A004	E 250UF, 220V	1	
	C16013	F2A2T251A004	E 250UF, 220V	1	
	C16014	F2A2T251A004	E 250UF, 220V	1	
	C16015	F2A2T251A004	E 250UF, 220V	1	
	C16016	F2A2T251A004	E 250UF, 220V	1	
	C16018	F0C2E225A231	E 0.022UF, 250V	1	
	C16023	F1L2J562A022	C 5600UF, K, 6.3V	1	
	C16071	F1L2J1520001	C 1500UF, K, 6.3V	1	PAVCA
	C16092	F1L2J1520001	C 1500UF, K, 6.3V	1	PAVCA
	C16131	F1L1E4750004	C 4.7UF, 25V	1	
	C16133	F1L1E4750004	C 4.7UF, 25V	1	
	C16135	F1K1E105A029	C 1UF, Z, 25V	1	
	C16151	F1K1E105A029	C 1UF, Z, 25V	1	
	C16152	F1L1E4750004	C 4.7UF, 25V	1	
	C16153	F1L1E4750004	C 4.7UF, 25V	1	
	C16154	F1L1E4750004	C 4.7UF, 25V	1	
	C16157	F1L1E4750004	C 4.7UF, 25V	1	
	C16191	F1L1E4750004	C 4.7UF, 25V	1	
	C16192	ECJ1VB1E104K	C 0.1UF, K, 25V	1	
	C16194	F1L1E4750004	C 4.7UF, 25V	1	
	C16195	F1L1E4750004	C 4.7UF, 25V	1	
	C16197	F1L1E4750004	C 4.7UF, 25V	1	
	C16201	F0C2E405A230	E 0.040UF, 250V	1	
	C16202	F0C2E405A230	E 0.040UF, 250V	1	
	C16203	F0C2E405A230	E 0.040UF, 250V	1	
	C16204	F0C2E405A230	E 0.040UF, 250V	1	
	C16205	F0C2E405A230	E 0.040UF, 250V	1	
	C16241	F2A1A101A106	E 100UF, 10V	1	
	C16242	F1H1C105A008	C 1UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C16243	F1H1H103A970	C 0.001UF, K, 50V	1	
	C16251	F1H1C105A008	C 1UF, K, 16V	1	
	C16252	F1K1E105A029	C 1UF, Z, 25V	1	
	C16262	F2AZZ821A012	E 820UF, 80V	1	PAVCA
	C16263	F2AZZ821A012	E 820UF, 80V	1	PAVCA
	C16265	F2AZZ821A012	E 820UF, 80V	1	PAVCA
	C16267	F2AZZ821A012	E 820UF, 80V	1	PAVCA
	C16268	F2AZZ821A012	E 820UF, 80V	1	PAVCA
	C16270	F2AZZ821A012	E 820UF, 80V	1	PAVCA
	C16271	F0C2E405A230	E 0.040UF, 250V	1	
	C16272	F0C2E405A230	E 0.040UF, 250V	1	
	C16272	F2A1E471A487	E 470UF, 25V	1	
	C16280	F1K1E105A029	C 1UF, Z, 25V	1	
	C16282	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16283	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16284	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16285	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16286	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16287	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16288	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16289	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16301	F2A1E470A454	E 47UF, 25V	1	
	C16302	F1H1H471A219	C 470UF, 50V	1	
	C16303	ECJ1XB1C103K	C 0.010UF, K, 16V	1	
	C16310	F2A2T251A004	E 250UF, 220V	1	
	C16311	F1H1A1050032	C 10UF, 50V	1	
	C16312	F1H1H472A970	C 4700PF, K, 50V	1	
	C16313	F1H1C105A008	C 1UF, K, 16V	1	
	C16321	F1L2E224A028	E 2200UF, 25V	1	
	C16322	F1L2E224A028	E 2200UF, 25V	1	
	C16323	F2A1E470A454	E 47UF, 25V	1	
	C16324	F2A1E471A487	E 470UF, 25V	1	
	C16325	F1L1E4750004	C 4.7UF, 25V	1	
	C16326	F1L1E4750004	C 4.7UF, 25V	1	
	C16328	F2A2D201A226	E 220UF, 200V	1	PAVCA
	C16329	F2A2D201A226	E 220UF, 200V	1	PAVCA
	C16331	F0C2E225A231	E 0.022UF, 250V	1	
	C16402	F1L2J562A022	C 5600UF, K, 6.3V	1	
	C16411	F2A2T251A004	E 250UF, 220V	1	
	C16412	F2A2T251A004	E 250UF, 220V	1	
	C16413	F2A2T251A004	E 250UF, 220V	1	
	C16414	F2A2T251A004	E 250UF, 220V	1	
	C16415	F2A2T251A004	E 250UF, 220V	1	
	C16416	F2A2T251A004	E 250UF, 220V	1	
	C16417	F2A2T251A004	E 250UF, 220V	1	
	C16419	F0C2E225A231	E 0.022UF, 250V	1	
	C16423	F1L2J562A022	C 5600UF, K, 6.3V	1	
	C16471	F1L2J1520001	C 1500UF, K, 6.3V	1	PAVCA
	C16472	F1K1E105A029	C 1UF, Z, 25V	1	
	C16491	F1L2J1520001	C 1500UF, K, 6.3V	1	PAVCA
	C16501	F1K1E105A029	C 1UF, Z, 25V	1	
	C16502	F1L1E4750004	C 4.7UF, 25V	1	
	C16503	F2A1E471A487	E 470UF, 25V	1	
	C16504	F1L1E4750004	C 4.7UF, 25V	1	
	C16505	F1K1E105A029	C 1UF, Z, 25V	1	
	C16521	F1K1E105A029	C 1UF, Z, 25V	1	
	C16522	F1L1E4750004	C 4.7UF, 25V	1	
	C16523	F1L1E4750004	C 4.7UF, 25V	1	
	C16524	F1L1E4750004	C 4.7UF, 25V	1	
	C16525	F1L1E4750004	C 4.7UF, 25V	1	
	C16533	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16535	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16536	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16562	F1H1C105A008	C 1UF, K, 16V	1	
	C16563	F2A1A101A106	E 100UF, 10V	1	
	C16564	F1H1C105A008	C 1UF, K, 16V	1	
	C16565	F1H1H103A970	C 0.001UF, K, 50V	1	
	C16566	F1H1H103A970	C 0.001UF, K, 50V	1	
	C16581	F1K1E105A029	C 1UF, Z, 25V	1	
	C16582	F1H1C105A008	C 1UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C16593	F1H1H102A971	C 1000PF, K, 50V	1	
	C16602	F1H1H220A971	C 22PF, K, 50V	1	
	C16603	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16604	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16605	F1H1H220A971	C 22PF, K, 50V	1	
	C16606	F1H1H220A971	C 22PF, K, 50V	1	
	C16608	F1H1H221A971	C 220UF, K, 50V	1	
	C16631	F0C2E405A230	E 0.040UF, 250V	1	
	C16632	F0C2E405A230	E 0.040UF, 250V	1	
	C16633	F0C2E405A230	E 0.040UF, 250V	1	
	C16634	F0C2E405A230	E 0.040UF, 250V	1	
	C16635	F0C2E405A230	E 0.040UF, 250V	1	
	C16641	F1L2E153A029	E 0.015UF, 25V	1	
	C16642	F1L2E153A029	E 0.015UF, 25V	1	
	C16661	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16662	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16664	F1H1H820A971	C 82UF, 50V	1	PAVCA
	C16665	F1H1H820A971	C 82UF, 50V	1	PAVCA
	C16666	F1H1H820A971	C 82UF, 50V	1	PAVCA
	C16684	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16685	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16691	ECA2CM101	E 100UF, 160V	1	
	C16692	ECA2CM101	E 100UF, 160V	1	
	C16707	F1H1H220A971	C 22PF, K, 50V	1	
	C16708	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16721	F2A1E221A487	E 220UF, 25V	1	
	C16723	F1L1E4750004	C 4.7UF, 25V	1	
	C16724	F1L1E4750004	C 4.7UF, 25V	1	
	C16725	F1L1E4750004	C 4.7UF, 25V	1	
	C16753	F1L1E4750004	C 4.7UF, 25V	1	
	C16755	F1L1E4750004	C 4.7UF, 25V	1	
	C16756	F1L1E4750004	C 4.7UF, 25V	1	
	C16771	F1H1C105A008	C 1UF, K, 16V	1	
	C16772	F1L1E4750004	C 4.7UF, 25V	1	
	C16773	F1L1E4750004	C 4.7UF, 25V	1	
	C16775	F1L1E4750004	C 4.7UF, 25V	1	
	C16791	F2A1E221A487	E 220UF, 25V	1	
	C16795	F2A1E471A487	E 470UF, 25V	1	
	C16796	F2A1E471A487	E 470UF, 25V	1	
	C16806	ECA2CM101	E 100UF, 160V	1	
	C16807	ECA2CM101	E 100UF, 160V	1	
	C16811	ECJ3VC1H472J	C 4700PF, J, 50V	1	
	C16813	ECA2CM101	E 100UF, 160V	1	
	C16814	F1H1H561A971	C 560UF, 50V	1	
	C16821	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16822	F2A2G470A187	E 470UF, 400V	1	
	C16823	F1L2J562A022	C 5600UF, K, 6.3V	1	
	C16835	F2A1E221A487	E 220UF, 25V	1	
	C16842	ECA2CM101	E 100UF, 160V	1	
	C16843	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16844	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16855	F1H1C105A008	C 1UF, K, 16V	1	
	C16856	F1H1A1050032	C 10UF, 50V	1	
	C16857	F1H1H472A970	C 4700PF, K, 50V	1	
	C16858	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16860	F1H1A1050032	C 10UF, 50V	1	
	C16861	F1H1H472A970	C 4700PF, K, 50V	1	
	C16862	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16863	F1H1H103A970	C 0.001UF, K, 50V	1	
	C16864	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16866	F1H1A1050032	C 10UF, 50V	1	
	C16867	F1H1H472A970	C 4700PF, K, 50V	1	
	C16868	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16869	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C17101	F1H1A1050032	C 10UF, 50V	1	
	C17102	F1H1A1050032	C 10UF, 50V	1	
	C17109	F1K2A105A006	C 1UF, 100V	1	
	C17110	F1K2A105A006	C 1UF, 100V	1	
	C17112	F1K2A105A006	C 1UF, 100V	1	
	C17114	F1K2A105A006	C 1UF, 100V	1	
	C17119	F1H1A1050032	C 10UF, 50V	1	
	C17120	F1H1A1050032	C 10UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C17121	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17122	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17123	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17124	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17125	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17126	FIK2A105A006	C 1UF, 100V	1	
	C17130	FIH1A1050032	C 10UF, 50V	1	
	C17131	FIH1A1050032	C 10UF, 50V	1	
	C17132	FIH1A1050032	C 10UF, 50V	1	
	C17133	FIH1A1050032	C 10UF, 50V	1	
	C17134	FIH1A1050032	C 10UF, 50V	1	
	C17135	FIH1A1050032	C 10UF, 50V	1	
	C17136	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17201	FIH1A1050032	C 10UF, 50V	1	
	C17202	FIH1A1050032	C 10UF, 50V	1	
	C17203	FIH1A1050032	C 10UF, 50V	1	
	C17204	FIH1A1050032	C 10UF, 50V	1	
	C17205	FIH1A1050032	C 10UF, 50V	1	
	C17206	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17207	FIH1A1050032	C 10UF, 50V	1	
	C17210	FIH1A1050032	C 10UF, 50V	1	
	C17211	FIK2A105A006	C 1UF, 100V	1	
	C17213	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17214	FIK2A105A006	C 1UF, 100V	1	
	C17218	FIK2A105A006	C 1UF, 100V	1	
	C17219	FIH1A1050032	C 10UF, 50V	1	
	C17220	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17224	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17225	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17226	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17227	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17228	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17229	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17230	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17231	FIH1A1050032	C 10UF, 50V	1	
	C17232	FIK2A105A006	C 1UF, 100V	1	
	C17236	FIH1A1050032	C 10UF, 50V	1	
	C17238	FIK2A105A006	C 1UF, 100V	1	
	C17241	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17242	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17302	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17304	FIH1A1050032	C 10UF, 50V	1	
	C17305	FIH1A1050032	C 10UF, 50V	1	
	C17310	FIK2A105A006	C 1UF, 100V	1	
	C17313	FIK2A105A006	C 1UF, 100V	1	
	C17314	FIK2A105A006	C 1UF, 100V	1	
	C17315	FIK2A105A006	C 1UF, 100V	1	
	C17322	FIH1A1050032	C 10UF, 50V	1	
	C17323	FIH1A1050032	C 10UF, 50V	1	
	C17325	FIK2A105A006	C 1UF, 100V	1	
	C17328	FIH1A1050032	C 10UF, 50V	1	
	C17329	FIH1A1050032	C 10UF, 50V	1	
	C17330	FIH1A1050032	C 10UF, 50V	1	
	C17331	FIH1A1050032	C 10UF, 50V	1	
	C17332	FIH1A1050032	C 10UF, 50V	1	
	C17333	FIH1A1050032	C 10UF, 50V	1	
	C17334	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17335	FIK2A105A006	C 1UF, 100V	1	
	C17401	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17402	FIK2A105A006	C 1UF, 100V	1	
	C17404	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17409	FIH1A1050032	C 10UF, 50V	1	
	C17410	FIH1A1050032	C 10UF, 50V	1	
	C17415	FIK2A105A006	C 1UF, 100V	1	
	C17418	FIK2A105A006	C 1UF, 100V	1	
	C17419	FIK2A105A006	C 1UF, 100V	1	
	C17420	FIK2A105A006	C 1UF, 100V	1	
	C17427	FIH1A1050032	C 10UF, 50V	1	
	C17428	FIH1A1050032	C 10UF, 50V	1	
	C17429	FIK2A105A006	C 1UF, 100V	1	
	C17433	FIH1A1050032	C 10UF, 50V	1	
	C17434	FIH1A1050032	C 10UF, 50V	1	
	C17435	FIH1A1050032	C 10UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C17436	FIH1A1050032	C 10UF, 50V	1	
	C17437	FIH1A1050032	C 10UF, 50V	1	
	C17438	FIH1A1050032	C 10UF, 50V	1	
	C17501	FIH1A1050032	C 10UF, 50V	1	
	C17503	FIK2A105A006	C 1UF, 100V	1	
	C17504	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17507	FIH1A1050032	C 10UF, 50V	1	
	C17508	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17512	FIK2A105A006	C 1UF, 100V	1	
	C17513	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17514	FIH1A1050032	C 10UF, 50V	1	
	C17516	FIK2A105A006	C 1UF, 100V	1	
	C17518	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17520	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17521	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17522	FIH1A1050032	C 10UF, 50V	1	
	C17523	FIH1A1050032	C 10UF, 50V	1	
	C17524	FIH1A1050032	C 10UF, 50V	1	
	C17525	FIH1A1050032	C 10UF, 50V	1	
	C17526	FIH1A1050032	C 10UF, 50V	1	
	C17527	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17528	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17529	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17530	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17531	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17532	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17533	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17534	FIH1A1050032	C 10UF, 50V	1	
	C17535	FIK2A105A006	C 1UF, 100V	1	
	C17539	FIH1A1050032	C 10UF, 50V	1	
	C17541	FIK2A105A006	C 1UF, 100V	1	
	C17601	FIH1A1050032	C 10UF, 50V	1	
	C17602	FIH1A1050032	C 10UF, 50V	1	
	C17607	FIK2A105A006	C 1UF, 100V	1	
	C17610	FIK2A105A006	C 1UF, 100V	1	
	C17611	FIK2A105A006	C 1UF, 100V	1	
	C17612	FIK2A105A006	C 1UF, 100V	1	
	C17619	FIH1A1050032	C 10UF, 50V	1	
	C17620	FIH1A1050032	C 10UF, 50V	1	
	C17621	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17622	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17623	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17624	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17625	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17626	FIK2A105A006	C 1UF, 100V	1	
	C17630	FIH1A1050032	C 10UF, 50V	1	
	C17631	FIH1C104A143	C 0.1UF, K, 16V	1	
	C17632	FIH1A1050032	C 10UF, 50V	1	
	C17633	FIH1A1050032	C 10UF, 50V	1	
	C17634	FIH1A1050032	C 10UF, 50V	1	
	C17635	FIH1A1050032	C 10UF, 50V	1	
	C17636	FIH1A1050032	C 10UF, 50V	1	
	CA1	K1MN68BA0052	68P CONNECTOR	1	
	CA2	K1MN68BA0052	68P CONNECTOR	1	
	CA3	K1MN68BA0052	68P CONNECTOR	1	
	CA4	K1MN68BA0052	68P CONNECTOR	1	
	CA5	K1MN68BA0052	68P CONNECTOR	1	
	CA6	K1MN68BA0052	68P CONNECTOR	1	
	CA7	K1MN68BA0052	68P CONNECTOR	1	
	CA8	K1MN68BA0052	68P CONNECTOR	1	
	CA9	K1MN68BA0052	68P CONNECTOR	1	
	CA10	K1MN68BA0052	68P CONNECTOR	1	
	CA11	K1MN68BA0052	68P CONNECTOR	1	
	CA12	K1MN68BA0052	68P CONNECTOR	1	
	CA13	K1MN68BA0052	68P CONNECTOR	1	
	CA14	K1MN68BA0052	68P CONNECTOR	1	
	CA15	K1MN68BA0052	68P CONNECTOR	1	
	CB1	K1MN68BA0052	68P CONNECTOR	1	
	CB2	K1MN68BA0052	68P CONNECTOR	1	
	CB3	K1MN68BA0052	68P CONNECTOR	1	
	CB4	K1MN68BA0052	68P CONNECTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	CB5	K1MN68BA0052	68P CONNECTOR	1	
	CB6	K1MN68BA0052	68P CONNECTOR	1	
	CB7	K1MN68BA0052	68P CONNECTOR	1	
	CB8	K1MN68BA0052	68P CONNECTOR	1	
	CB9	K1MN68BA0052	68P CONNECTOR	1	
	CB10	K1MN68BA0052	68P CONNECTOR	1	
	CB11	K1MN68BA0052	68P CONNECTOR	1	
	CB12	K1MN68BA0052	68P CONNECTOR	1	
	CB13	K1MN68BA0052	68P CONNECTOR	1	
	CB14	K1MN68BA0052	68P CONNECTOR	1	
	CB15	K1MN68BA0052	68P CONNECTOR	1	
	D14903	B0HCMM000013	DIODE	1	
	D14904	B0HCMM000013	DIODE	1	
	D14905	B0HCMM000013	DIODE	1	
	D14906	B0HCMM000013	DIODE	1	
	D14907	B0HCMM000013	DIODE	1	
	D14908	B0HCMM000013	DIODE	1	
	D14909	MA3X152E0L	ZENER DIODE	1	
	D14910	MA2J11100L	DIODE	1	
	D14911	B0HCMM000013	DIODE	1	
	D14912	B0HCMM000013	DIODE	1	
	D14913	B0HCMM000013	DIODE	1	
	D14914	B0HCMM000013	DIODE	1	
	D14953	B0HCMM000013	DIODE	1	
	D14954	B0HCMM000013	DIODE	1	
	D14955	B0HCMM000013	DIODE	1	
	D14956	B0HCMM000013	DIODE	1	
	D14957	B0HCMM000013	DIODE	1	
	D14958	B0HCMM000013	DIODE	1	
	D14959	B0HCMM000013	DIODE	1	
	D14960	B0HCMM000013	DIODE	1	
	D14961	MA8056H	ZENER DIODE	1	
	D14974	MA3X152E0L	ZENER DIODE	1	
	D14975	MA2J11100L	DIODE	1	
	D14976	MA2J11100L	DIODE	1	
	D14977	B0HCMM000013	DIODE	1	
	D14978	B0HCMM000013	DIODE	1	
	D14979	MA2J11100L	DIODE	1	
	D16001	B0FBCN000005	DIODE	1	
	D16002	B0FBCN000005	DIODE	1	
	D16003	B0FBCN000005	DIODE	1	
	D16021	MA3DF30000LW	ZENER DIODE	1	
	D16022	MA3DF30000LW	ZENER DIODE	1	
	D16032	MA2J11100L	DIODE	1	
	D16041	MA3DF46000LW	ZENER DIODE	1	
	D16042	MA3DF46000LW	ZENER DIODE	1	
	D16043	MA3DF46000LW	ZENER DIODE	1	
	D16050	B0ECKP000047	DIODE	1	
	D16051	B0FBCN000005	DIODE	1	
	D16052	B0FBCN000005	DIODE	1	
	D16053	B0FBCN000005	DIODE	1	
	D16101	MA22D3900L	DIODE	1	
	D16131	B0ECP000003	DIODE	1	
	D16151	B0ECP000003	DIODE	1	
	D16152	B0ECKP000047	DIODE	1	
	D16153	B0ECKP000047	DIODE	1	
	D16191	B0ECKP000047	DIODE	1	
	D16192	MA2J11100L	DIODE	1	
	D16253	B3ABB0000210	LED	1	
	D16255	MA2J11100L	DIODE	1	
	D16280	MA2J11100L	DIODE	1	
	D16281	MAZ80510LL	ZENER DIODE	1	
	D16282	MAZ80680ML	ZENER DIODE	1	
	D16283	MA3X152D0L	DIODE	1	
	D16284	MA3X152D0L	DIODE	1	
	D16285	MA3X152D0L	DIODE	1	
	D16286	MA3X152D0L	DIODE	1	
	D16300	B0ECKP000047	DIODE	1	
	D16301	MA3X152E0L	ZENER DIODE	1	
	D16302	MA2J11100L	DIODE	1	
	D16304	MAZ80510LL	ZENER DIODE	1	
	D16311	MAZ81500ML	ZENER DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D16313	B0ECKP000047	DIODE	1	
	D16321	B0ECKP000047	DIODE	1	
	D16323	MAZ80330HL	ZENER DIODE	1	
	D16324	MA3X152D0L	DIODE	1	
	D16401	MA3DF47000LW	ZENER DIODE	1	
	D16402	MA3DF47000LW	ZENER DIODE	1	
	D16403	MA3DF47000LW	ZENER DIODE	1	
	D16407	MA22D3900L	DIODE	1	
	D16411	MA2J11100L	DIODE	1	
	D16421	MA3DF40000LW	ZENER DIODE	1	
	D16422	MA3DF40000LW	ZENER DIODE	1	
	D16423	MA3DF40000LW	ZENER DIODE	1	
	D16451	B0ECKP000047	DIODE	1	
	D16461	MA3DF46000LW	ZENER DIODE	1	
	D16462	MA3DF46000LW	ZENER DIODE	1	
	D16463	MA3DF46000LW	ZENER DIODE	1	
	D16464	MA3DF46000LW	ZENER DIODE	1	
	D16466	MA2J11100L	DIODE	1	
	D16473	MA3X152D0L	DIODE	1	
	D16474	MA2J11100L	DIODE	1	
	D16475	MAZ80510LL	ZENER DIODE	1	
	D16476	MA2J11100L	DIODE	1	
	D16477	MA2J11100L	DIODE	1	
	D16478	B0HCKS000002	DIODE	1	
	D16480	MA2J11100L	DIODE	1	
	D16481	MA3DF46000LW	ZENER DIODE	1	
	D16482	MA3DF46000LW	ZENER DIODE	1	
	D16483	MA3DF46000LW	ZENER DIODE	1	
	D16484	MA3DF46000LW	ZENER DIODE	1	
	D16497	B0ECKP000047	DIODE	1	
	D16503	B0HCKS000002	DIODE	1	
	D16522	B0ECKP000047	DIODE	1	
	D16523	B0ECKP000047	DIODE	1	
	D16524	B0ECKP000047	DIODE	1	
	D16536	B0HCKS000002	DIODE	1	
	D16583	B3ABB0000210	LED	1	
	D16602	MA8120M	ZENER DIODE	1	
	D16604	MA2J11100L	DIODE	1	
	D16605	MAZ80510LL	ZENER DIODE	1	
	D16606	B0ECKM000038	DIODE	1	
	D16607	MA2J11100L	DIODE	1	
	D16608	MA8120M	ZENER DIODE	1	
	D16609	MA2J11100L	DIODE	1	
	D16610	MA2J11100L	DIODE	1	
	D16618	B0ECKP000047	DIODE	1	
	D16619	B0ECKP000047	DIODE	1	
	D16621	B0FBCN000006	DIODE	1	
	D16622	B0FBCN000006	DIODE	1	
	D16623	B0FBCN000006	DIODE	1	
	D16631	MAZ81500ML	ZENER DIODE	1	
	D16632	MAZ81500ML	ZENER DIODE	1	
	D16633	MAZ81500ML	ZENER DIODE	1	
	D16641	MA3DF25000LW	ZENER DIODE	1	PAVCA
	D16642	MA3DF25000LW	ZENER DIODE	1	PAVCA
	D16643	MA3DF25000LW	ZENER DIODE	1	PAVCA
	D16660	B0HCMM000014	DIODE	1	
	D16661	MA2J11100L	DIODE	1	
	D16662	MAZ81500ML	ZENER DIODE	1	
	D16663	MAZ81500ML	ZENER DIODE	1	
	D16664	MAZ81500ML	ZENER DIODE	1	
	D16665	MAZ80510LL	ZENER DIODE	1	
	D16667	MA2J11100L	DIODE	1	
	D16668	MA3X152D0L	DIODE	1	
	D16669	MA2J11100L	DIODE	1	
	D16671	MA2J11100L	DIODE	1	
	D16702	MA2J11100L	DIODE	1	
	D16710	MAZ815000L	ZENER DIODE	1	
	D16711	B0HCMR000002	DIODE	1	
	D16712	MAZ815000L	ZENER DIODE	1	
	D16713	B0HCMR000002	DIODE	1	
	D16714	MAZ815000L	ZENER DIODE	1	
	D16715	B0HCMR000002	DIODE	1	
	D16717	MA8330M	ZENER DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D16718	MA2J11100L	DIODE	1	
	D16719	B0ECKP000047	DIODE	1	
	D16720	B0ECKP000047	DIODE	1	
	D16721	B0HCKS000002	DIODE	1	
	D16722	MA2J11100L	DIODE	1	
	D16725	MA2J11100L	DIODE	1	
	D16761	MA22D3900L	DIODE	1	
	D16764	B0HCKS000002	DIODE	1	
	D16765	B0ECKP000047	DIODE	1	
	D16781	MA2J11100L	DIODE	1	
	D16791	MAZ82000ML	ZENER DIODE	1	
	D16820	MA3X152E0L	ZENER DIODE	1	
	D16821	MAZ82000ML	ZENER DIODE	1	
	D16822	MA2J11100L	DIODE	1	
	D16824	MA8330M	ZENER DIODE	1	
	D16825	MA8330M	ZENER DIODE	1	
	D16835	B0ECKP000047	DIODE	1	
	D16859	B0HCKS000002	DIODE	1	
	D16860	B0HCKS000002	DIODE	1	
	D16861	MA8330M	ZENER DIODE	1	
	D16862	MA8330M	ZENER DIODE	1	
	D16871	MAZ815000L	ZENER DIODE	1	
	D16873	MAZ815000L	ZENER DIODE	1	
	D16874	MAZ80510LL	ZENER DIODE	1	
	D16875	MA2J11100L	DIODE	1	
	D17101	B0ECKM000038	DIODE	1	
	D17102	B0ECKM000038	DIODE	1	
	D17103	B0ECKM000038	DIODE	1	
	D17104	B0ECKM000038	DIODE	1	
	D17105	B0ECKM000038	DIODE	1	
	D17106	B0ECKM000038	DIODE	1	
	D17107	B0ECKM000038	DIODE	1	
	D17108	B0ECKM000038	DIODE	1	
	D17109	B0ECKM000038	DIODE	1	
	D17110	B0ECKM000038	DIODE	1	
	D17201	B0ECKM000038	DIODE	1	
	D17202	B0ECKM000038	DIODE	1	
	D17203	B0ECKM000038	DIODE	1	
	D17204	B0ECKM000038	DIODE	1	
	D17205	B0ECKM000038	DIODE	1	
	D17206	B0ECKM000038	DIODE	1	
	D17207	B0ECKM000038	DIODE	1	
	D17208	B0ECKM000038	DIODE	1	
	D17209	B0ECKM000038	DIODE	1	
	D17210	B0ECKM000038	DIODE	1	
	D17301	B0ECKM000038	DIODE	1	
	D17302	B0ECKM000038	DIODE	1	
	D17303	B0ECKM000038	DIODE	1	
	D17304	B0ECKM000038	DIODE	1	
	D17305	B0ECKM000038	DIODE	1	
	D17306	B0ECKM000038	DIODE	1	
	D17307	B0ECKM000038	DIODE	1	
	D17308	B0ECKM000038	DIODE	1	
	D17309	B0ECKM000038	DIODE	1	
	D17310	B0ECKM000038	DIODE	1	
	D17401	B0ECKM000038	DIODE	1	
	D17402	B0ECKM000038	DIODE	1	
	D17403	B0ECKM000038	DIODE	1	
	D17404	B0ECKM000038	DIODE	1	
	D17405	B0ECKM000038	DIODE	1	
	D17406	B0ECKM000038	DIODE	1	
	D17407	B0ECKM000038	DIODE	1	
	D17408	B0ECKM000038	DIODE	1	
	D17409	B0ECKM000038	DIODE	1	
	D17410	B0ECKM000038	DIODE	1	
	D17501	B0ECKM000038	DIODE	1	
	D17502	B0ECKM000038	DIODE	1	
	D17503	B0ECKM000038	DIODE	1	
	D17504	B0ECKM000038	DIODE	1	
	D17505	B0ECKM000038	DIODE	1	
	D17506	B0ECKM000038	DIODE	1	
	D17507	B0ECKM000038	DIODE	1	
	D17508	B0ECKM000038	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D17509	B0ECKM000038	DIODE	1	
	D17510	B0ECKM000038	DIODE	1	
	D17601	B0ECKM000038	DIODE	1	
	D17602	B0ECKM000038	DIODE	1	
	D17603	B0ECKM000038	DIODE	1	
	D17604	B0ECKM000038	DIODE	1	
	D17605	B0ECKM000038	DIODE	1	
	D17606	B0ECKM000038	DIODE	1	
	D17607	B0ECKM000038	DIODE	1	
	D17608	B0ECKM000038	DIODE	1	
	D17609	B0ECKM000038	DIODE	1	
	D17610	B0ECKM000038	DIODE	1	
	FL17101	J0HABH000013	LC FILTER	1	
	FL17201	J0HABH000013	LC FILTER	1	
	FL17501	J0HABH000013	LC FILTER	1	
	FL17601	J0HABH000013	LC FILTER	1	
	IC14901	AN16181A-VT	IC	1	PAVCA
	IC14902	AN16181A-VT	IC	1	PAVCA
	IC14903	AN16181A-VT	IC	1	PAVCA
	IC14904	AN16181A-VT	IC	1	PAVCA
	IC14905	AN16181A-VT	IC	1	PAVCA
	IC14906	AN16181A-VT	IC	1	PAVCA
	IC14907	AN16181A-VT	IC	1	PAVCA
	IC14908	AN16181A-VT	IC	1	PAVCA
	IC14951	AN16181A-VT	IC	1	PAVCA
	IC14952	AN16181A-VT	IC	1	PAVCA
	IC14953	AN16181A-VT	IC	1	PAVCA
	IC14954	AN16181A-VT	IC	1	PAVCA
	IC14955	AN16181A-VT	IC	1	PAVCA
	IC14956	AN16181A-VT	IC	1	PAVCA
	IC14957	AN16181A-VT	IC	1	PAVCA
	IC14958	AN16181A-VT	IC	1	PAVCA
	IC14961	C0JBAZ000094	IC	1	
	IC14962	C0JBAZ000094	IC	1	
	IC14963	C0JBAE000321	IC	1	
	IC14964	C0JBAA000174	IC	1	
	IC16131	C0ZBZ0000895	IC	1	
	IC16151	C0ZBZ0001324	IC	1	
	IC16241	C0JBAZ002811	IC	1	
	IC16251	C0BBBA000024	IC	1	
	IC16301	MIP9L02MBS	IC	1	
	IC16302	C0CBALC00012	IC	1	
	IC16303	C0JBAB0000715	IC	1	
	IC16464	C0JBAB0000715	IC	1	
	IC16465	C0JBAB0000715	IC	1	
	IC16471	C0DBEKA00003	IC	1	
	IC16501	C0ZBZ0001324	IC	1	
	IC16521	C0ZBZ0001324	IC	1	
	IC16561	C0JBAZ002811	IC	1	
	IC16562	C0JBAZ002811	IC	1	
	IC16563	C0JBAZ000094	IC	1	
	IC16564	C0JBAB0000715	IC	1	
	IC16581	C0BBBA000024	IC	1	
	IC16724	C0CBADC00072	IC	1	
	IC16725	C0CBADC00072	IC	1	
	IC16771	C0CBADC00072	IC	1	
	IC16772	C0ZBZ0001325	IC	1	
	IC16773	C0JBAB0000715	IC	1	
	IC16784	MIP9L02MBS	IC	1	
	IC16786	MIP9L02MBS	IC	1	
	IC16787	C0DBEYY00078	IC	1	
	IC16788	MIP9L02MBS	IC	1	
	IC16789	C0DBEYY00078	IC	1	
	IC16791	EHMDD9863	LINEAR IC	1	
	IC16801	C0DBEYY00078	IC	1	
	IC17101	C0JBAZ001120	IC	1	
	IC17102	C0JBAZ001120	IC	1	
	IC17103	C0JBAZ001120	IC	1	
	IC17104	C0JBAZ001120	IC	1	
	IC17105	C0JBAZ001120	IC	1	
	IC17106	C0JBAZ001120	IC	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	IC17201	C0JBAZ001120	IC	1	
	IC17202	C0JBAZ001120	IC	1	
	IC17203	C0JBAZ001120	IC	1	
	IC17204	C0JBAZ001120	IC	1	
	IC17205	C0JBAZ001120	IC	1	
	IC17206	C0JBAZ001120	IC	1	
	IC17207	C0JBAZ001120	IC	1	
	IC17208	C0JBAZ001120	IC	1	
	IC17209	C0JBAZ001120	IC	1	
	IC17210	C0JBAZ001120	IC	1	
	IC17211	C0JBAZ001120	IC	1	
	IC17212	C0JBAZ001120	IC	1	
	IC17301	C0JBAZ001120	IC	1	
	IC17306	C0JBAZ001120	IC	1	
	IC17401	C0JBAZ001120	IC	1	
	IC17402	C0JBAZ001120	IC	1	
	IC17501	C0JBAZ001120	IC	1	
	IC17502	C0JBAZ001120	IC	1	
	IC17503	C0JBAZ001120	IC	1	
	IC17504	C0JBAZ001120	IC	1	
	IC17505	C0JBAZ001120	IC	1	
	IC17506	C0JBAZ001120	IC	1	
	IC17507	C0JBAZ001120	IC	1	
	IC17508	C0JBAZ001120	IC	1	
	IC17509	C0JBAZ001120	IC	1	
	IC17510	C0JBAZ001120	IC	1	
	IC17511	C0JBAZ001120	IC	1	
	IC17512	C0JBAZ001120	IC	1	
	IC17513	C0JBAZ001120	IC	1	
	IC17601	C0JBAZ001120	IC	1	
	IC17602	C0JBAZ001120	IC	1	
	IC17603	C0JBAZ001120	IC	1	
	IC17604	C0JBAZ001120	IC	1	
	IC17605	C0JBAZ001120	IC	1	
	IC17606	C0JBAZ001120	IC	1	
	L16001	G0C1R4KA0118	PEAKING COIL	1	
	L16002	G0C1R4KA0118	PEAKING COIL	1	
	L16003	G0C1R4KA0118	PEAKING COIL	1	
	L16004	G0C1R4KA0118	PEAKING COIL	1	
	L16005	G0C1R4KA0118	PEAKING COIL	1	
	L16006	G0C1R4KA0118	PEAKING COIL	1	
	L16011	G0C1R4KA0118	PEAKING COIL	1	
	L16012	G0C1R4KA0118	PEAKING COIL	1	
	L16013	G0C1R4KA0118	PEAKING COIL	1	
	L16014	G0C1R4KA0118	PEAKING COIL	1	
	L16015	G0C1R4KA0118	PEAKING COIL	1	
	L16016	G0C1R4KA0118	PEAKING COIL	1	
	L16103	G0ZZ00002183	PEAKING COIL	1	
	L16221	G0ZZ00002183	PEAKING COIL	1	
	L16262	G0ZZ00002183	PEAKING COIL	1	
	L16271	G0ZZ00002183	PEAKING COIL	1	
	L16301	J0JHC0000031	CHIP INDUCTOR	1	
	L16398	J0JJC0000015	CHIP INDUCTOR	1	
	L16399	J0JJC0000015	CHIP INDUCTOR	1	
	L16401	G0C1R9KA0147	PEAKING COIL	1	
	L16402	G0C1R9KA0147	PEAKING COIL	1	
	L16403	G0C1R9KA0147	PEAKING COIL	1	
	L16404	G0C1R9KA0147	PEAKING COIL	1	
	L16405	G0C1R9KA0147	PEAKING COIL	1	
	L16406	G0C1R9KA0147	PEAKING COIL	1	
	L16407	G0C1R9KA0147	PEAKING COIL	1	
	L16411	G0C1R9KA0147	PEAKING COIL	1	
	L16412	G0C1R9KA0147	PEAKING COIL	1	
	L16413	G0C1R9KA0147	PEAKING COIL	1	
	L16414	G0C1R9KA0147	PEAKING COIL	1	
	L16415	G0C1R9KA0147	PEAKING COIL	1	
	L16416	G0C1R9KA0147	PEAKING COIL	1	
	L16417	G0C1R9KA0147	PEAKING COIL	1	
	L16472	G0ZZ00002183	PEAKING COIL	1	
	L16473	G0ZZ00002183	PEAKING COIL	1	
	L16474	G0ZZ00002183	PEAKING COIL	1	
	L16591	G0ZZ00002183	PEAKING COIL	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L16698	G0C681KA0187	PEAKING COIL	1	
	L16699	G0C331KA0187	PEAKING COIL	1	
	L16801	G0ZZ00002183	PEAKING COIL	1	
	L16851	G0ZZ00002183	PEAKING COIL	1	
	PC14951	B3PBA0000457	IC	1	
	PC14952	B3PBA0000457	IC	1	
	PC14953	B3PBA0000456	IC	1	
	PC16191	B3PBA0000496	IC	1	
	PC16461	B3PBA0000457	IC	1	
	PC16480	B3PBA0000223	IC	1	
	PC16601	B3PBA0000223	IC	1	
	PC16603	B3PBA0000223	IC	1	
	PC16684	B3PBA0000496	IC	1	
	PC16685	B3PBA0000496	IC	1	
	PC16896	B3PBA0000223	IC	1	
	PC16897	B3PBA0000223	IC	1	
△	PCB	ETX2MM706NGN	CIRCUIT BOARD P	1	PAVCA
△	PCB	TXNC11RATJ	CIRCUIT BOARD C1	1	PAVCA
△	PCB	TXNC21RATJ	CIRCUIT BOARD C2	1	PAVCA
△	PCB	TXNC31RATJ	CIRCUIT BOARD C3	1	PAVCA
△	PCB	TXNC41RATJ	CIRCUIT BOARD C4	1	PAVCA
△	PCB	TXNC51RATJ	CIRCUIT BOARD C5	1	PAVCA
△	PCB	TXNC61RATJ	CIRCUIT BOARD C6	1	PAVCA
△	PCB	TXNSC1RATJ	CIRCUIT BOARD SC	1	PAVCA
△	PCB	TXNSD1RATJ	CIRCUIT BOARD SD	1	PAVCA
△	PCB	TXNSS1RATJ	CIRCUIT BOARD SS	1	PAVCA
△	PCB	TXNSS21RATJ	CIRCUIT BOARD SS2	1	PAVCA
△	PCB	TXNSS31RATJ	CIRCUIT BOARD SS3	1	PAVCA
△	PCB	TXNSU1RATJ	CIRCUIT BOARD SU	1	PAVCA
	Q16001	B1JAEN000004	TRANSISTOR	1	PAVCA
	Q16002	B1JAEN000004	TRANSISTOR	1	PAVCA
	Q16003	B1JAEN000004	TRANSISTOR	1	PAVCA
	Q16004	B1JAEN000004	TRANSISTOR	1	PAVCA
	Q16005	B1JAEN000004	TRANSISTOR	1	PAVCA
	Q16021	B1JAEN000004	TRANSISTOR	1	PAVCA
	Q16022	B1JAEN000004	TRANSISTOR	1	PAVCA
	Q16023	B1JAEN000004	TRANSISTOR	1	PAVCA
	Q16024	B1JAEN000004	TRANSISTOR	1	PAVCA
	Q16025	B1JAEN000004	TRANSISTOR	1	PAVCA
	Q16041	2PG0330000RP	TRANSISTOR	1	PAVCA
	Q16042	2PG0330000RP	TRANSISTOR	1	PAVCA
	Q16051	2PG0330000RP	TRANSISTOR	1	PAVCA
	Q16052	2PG0330000RP	TRANSISTOR	1	PAVCA
	Q16055	B1HFFPA00001	TRANSISTOR	1	
	Q16056	B1HFFPA00001	TRANSISTOR	1	
	Q16101	2SK4174000RP	FET	1	PAVCA
	Q16102	2SK4175000LZ	FET	1	
	Q16141	B1HFFPA00001	TRANSISTOR	1	
	Q16161	B1HFFPA00001	TRANSISTOR	1	
	Q16191	B1HFFPA00001	TRANSISTOR	1	
	Q16251	2SD0601ARL	TRANSISTOR	1	
	Q16280	2SD0601ARL	TRANSISTOR	1	
	Q16301	B1CBGD000001	FET	1	
	Q16302	B1CFNG000001	FET	1	
	Q16304	2SB0709ARL	TRANSISTOR	1	
	Q16331	2SK4174000RP	FET	1	PAVCA
	Q16339	2SK417300L	FET	1	
	Q16401	2PG0060A00RP	TRANSISTOR	1	
	Q16402	2PG0060A00RP	TRANSISTOR	1	
	Q16403	2PG0060A00RP	TRANSISTOR	1	
	Q16404	2PG0060A00RP	TRANSISTOR	1	
	Q16406	2PG0060A00RP	TRANSISTOR	1	
	Q16421	B1JAEP000004	TRANSISTOR	1	
	Q16422	B1JAEP000004	TRANSISTOR	1	
	Q16423	B1JAEP000004	TRANSISTOR	1	
	Q16424	B1JAEP000004	TRANSISTOR	1	
	Q16425	B1JAEP000004	TRANSISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q16441	2PG0430000RP	TRANSISTOR	1	PAVCA
	Q16442	2PG0430000RP	TRANSISTOR	1	PAVCA
	Q16443	2PG0430000RP	TRANSISTOR	1	PAVCA
	Q16451	2PG0430000RP	TRANSISTOR	1	PAVCA
	Q16452	2PG0430000RP	TRANSISTOR	1	PAVCA
	Q16453	2PG0430000RP	TRANSISTOR	1	PAVCA
	Q16471	B1ABCF000231	TRANSISTOR	1	
	Q16501	B1HFFFA00001	TRANSISTOR	1	
	Q16502	B1HFFFA00001	TRANSISTOR	1	
	Q16503	B1HFFFA00001	TRANSISTOR	1	
	Q16521	B1HFFFA00001	TRANSISTOR	1	
	Q16522	B1HFFFA00001	TRANSISTOR	1	
	Q16523	B1HFFFA00001	TRANSISTOR	1	
	Q16531	B1HFFFA00001	TRANSISTOR	1	
	Q16532	B1HFFFA00001	TRANSISTOR	1	
	Q16551	B1HFFFA00001	TRANSISTOR	1	
	Q16552	B1HFFFA00001	TRANSISTOR	1	
	Q16601	B1DEET000002	FET	1	
	Q16602	2SD0601AQL	TRANSISTOR	1	
	Q16603	2SB0709ARL	TRANSISTOR	1	
	Q16604	B1CHPM000001	FET	1	
	Q16606	2SD0601AQL	TRANSISTOR	1	
	Q16607	B1CBGD000001	FET	1	
	Q16609	B1CFHL000002	FET	1	
	Q16621	2SK4208000RP	FET	1	PAVCA
	Q16622	2SK4208000RP	FET	1	PAVCA
	Q16623	2SK4208000RP	FET	1	PAVCA
	Q16642	B1JADN000004	TRANSISTOR	1	
	Q16643	B1JADN000004	TRANSISTOR	1	
	Q16644	B1JADN000004	TRANSISTOR	1	
	Q16661	B1JAER000004	TRANSISTOR	1	
	Q16662	2SD0601AQL	TRANSISTOR	1	
	Q16663	2SB0709ARL	TRANSISTOR	1	
	Q16664	B1HFFFA00001	TRANSISTOR	1	
	Q16665	B1ABCF000231	TRANSISTOR	1	
	Q16667	B1ADCN000007	TRANSISTOR	1	
	Q16701	B1ADCN000007	TRANSISTOR	1	
	Q16702	B1ABCF000231	TRANSISTOR	1	
	Q16743	2SD0601ARL	TRANSISTOR	1	
	Q16762	B1ADNF000006	TRANSISTOR	1	
	Q16781	B1HFFFA00001	TRANSISTOR	1	
	Q16801	B1ADCN000007	TRANSISTOR	1	
	Q16810	B1ABCF000231	TRANSISTOR	1	
	Q16814	B1ABCN000007	TRANSISTOR	1	
	Q16815	B1ABCN000007	TRANSISTOR	1	
	Q16816	2SD0601AQL	TRANSISTOR	1	
	Q16817	2SD0601AQL	TRANSISTOR	1	
	Q16871	2SB0709ARL	TRANSISTOR	1	
	Q16872	2SB0709ARL	TRANSISTOR	1	
	Q16873	B1ABCF000231	TRANSISTOR	1	
	Q16874	B1CBGD000001	FET	1	
	Q16875	B1ABCF000231	TRANSISTOR	1	
	Q16876	B1ABCF000231	TRANSISTOR	1	
	Q16879	B1ABCF000231	TRANSISTOR	1	
	R14349	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14353	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14354	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14355	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14357	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14359	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14360	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14361	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14363	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14365	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14366	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14367	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14369	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14371	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14372	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14373	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14375	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14376	D0GDR00Z0002	M 0 OHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R14378	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14379	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14381	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14382	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14384	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14385	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14387	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14388	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14390	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14391	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14393	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14394	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14397	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14901	D0GD101JA036	M 100 OHM, J, 0.25W	1	
	R14902	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14903	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14904	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14905	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14906	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14907	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R14908	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R14909	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R14910	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R14911	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14912	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14913	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14914	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14915	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R14916	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14917	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R14919	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R14920	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R14921	ERJ8GEYJ224V	M 220KOHM, J, 1/8W	1	
	R14923	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14924	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14925	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14926	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14928	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14929	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14930	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14932	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14933	D0GD101JA036	M 100 OHM, J, 0.25W	1	
	R14934	ERJ3GEYJ470	M 47 OHM, J, 1/16W	1	
	R14935	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R14936	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R14937	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R14939	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14940	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14942	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14943	ERJ6GEYJ470V	M 47 OHM, J, 1/10W	1	
	R14944	ERJ6GEYJ100V	M 10 OHM, J, 1/10W	1	
	R14947	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14949	ERJ6GEYJ203	M 20KOHM, J, 1/10W	1	
	R14950	D0GD103JA036	M 10KOHM, J, 0.25W	1	
	R14951	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14952	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14953	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	
	R14954	ERJ6GEYJ221V	M 220 OHM, J, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R14955	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R14956	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14957	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14958	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14959	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14960	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14961	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R14962	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R14963	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R14964	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14965	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R14966	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14967	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14971	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R14973	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14974	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14975	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14976	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14977	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R14978	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R14979	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R14980	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R14981	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14982	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14983	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14984	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14986	ERJ8GEYJ224V	M 220KOHM, J,1/8W	1	
	R14987	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14988	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R14990	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14991	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14992	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14993	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14994	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14995	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14996	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14997	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14998	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14999	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R16001	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16002	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16003	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16004	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16005	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16021	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16022	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16023	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16024	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16025	ERJT08J7R5V	M 7.5OHM,J,0.33W	1	
	R16031	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16032	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16033	ERJ6ENF5602	M 56KOHM, 1/10W	1	
	R16034	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16041	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16042	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16051	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16052	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16101	ERJT06J221V	M 220 OHM,F,0.25W	1	
	R16102	ERJT06J221V	M 220 OHM,F,0.25W	1	
	R16103	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16104	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16105	ERJ8GEYJ474V	M 470KOHM, J,1/8W	1	PAVCA
	R16109	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16110	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16116	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16131	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16132	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16134	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16137	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16138	ERJ14Y0R00	M 0 OHM, J,1/4W	1	
	R16141	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16142	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16143	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16151	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16152	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16154	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16155	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16159	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16161	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16162	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16163	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16171	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16172	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16173	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16181	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16182	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16183	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16191	D0GD151JA036	M 150 OHM,J,0.25W	1	
	R16192	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R16195	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16220	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16221	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16230	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16231	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16241	EXB38V470J	RESISTOR ARRAY	1	
	R16242	EXB38V472JV	RESISTOR ARRAY	1	
	R16251	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
	R16252	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16253	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16254	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
	R16255	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
	R16256	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
	R16257	D0GD273JA036	M 27KOHM,J,0.25W	1	PAVCA
	R16258	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R16260	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16261	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R16280	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16281	D0GD103JA036	M 10KOHM,J,0.25W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16282	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16283	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16284	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R16285	EXB38V623JV	RESISTOR ARRAY	1	PAVCA
	R16286	EXB38V623JV	RESISTOR ARRAY	1	PAVCA
	R16287	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16288	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16289	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16290	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16291	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16292	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16293	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16294	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16300	ERJT08J102V	M 1KOHM,J, 0.33W	1	
	R16301	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16302	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
	R16303	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16304	ERJT08J751V	M750 OHM,F,0.33W	1	PAVCA
	R16305	ERJ6GEYJ271V	M 270 OHM J 1/10W	1	
	R16306	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16308	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16309	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
	R16310	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16311	ERJ6GEYJ124V	M 120KOHM,J,1/10W	1	
	R16312	ERJ6GEYJ124V	M 120KOHM,J,1/10W	1	
	R16313	ERJ6ENF5762	M57.6KOHM, 1/10W	1	
	R16314	ERJ6ENF6192	M61.9KOHM, 1/10W	1	
	R16315	ERJ6ENF1241	M1.24KOHM, 1/10W	1	
	R16316	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R16321	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16322	ERJ6GEYF561	M 560 OHM,F,1/10W	1	
	R16323	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R16324	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16325	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16331	ERJT06J101V	M 100 OHM,F,0.25W	1	
	R16333	ERJ6ENF3303	M 330KOHM, 1/10W	1	
	R16338	ERJT06J101V	M 100 OHM,F,0.25W	1	
	R16339	ERJ6ENF3303	M 330KOHM, 1/10W	1	
	R16401	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16402	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16403	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16404	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16406	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16410	ERJ6GEYG391	M 390 OHM,F,1/10W	1	
	R16411	ERJ6ENF2700	M 270 OHM, 1/10W	1	
	R16414	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R16415	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R16416	D0GD103JA036	M 10KOHM,J,0.25W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16421	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16422	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16423	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16424	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16425	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16441	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16442	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16443	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16451	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16452	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16453	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16465	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16466	ERJ6ENF5602	M 56KOHM, 1/10W	1	
	R16467	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16468	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16471	ERJ6GEYG392	M 3.9KOHM,J,1/10W	1	
	R16472	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16473	ERJ6GEYF561	M 560 OHM,F,1/10W	1	
	R16474	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16475	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16476	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16478	ERJ6GEYJ562V	M 5.6KOHM,J,1/10W	1	
	R16479	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16480	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16501	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16502	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16503	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16504	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16505	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16506	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16507	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16509	ERJT08J1R0V	M 1.8OHM,J, 0.33W	1	
	R16510	ERJT14J1R0U	M 1.0 OHM, J,1/4W	1	
	R16511	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16512	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16513	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16514	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16516	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16517	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16518	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16519	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16520	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16521	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16522	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16523	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16526	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16527	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16528	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16529	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16530	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16531	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16532	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16533	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16536	ERJT08J1R0V	M 1.8OHM,J, 0.33W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16538	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16539	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16540	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16542	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16543	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16544	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16551	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16552	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16553	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16561	EXB38V470J	RESISTOR ARRAY	1	
	R16562	EXB38V470J	RESISTOR ARRAY	1	
	R16563	EXB38V470J	RESISTOR ARRAY	1	
	R16564	EXB38V470J	RESISTOR ARRAY	1	
	R16565	EXB38V472JV	RESISTOR ARRAY	1	
	R16566	EXB38V472JV	RESISTOR ARRAY	1	
	R16567	EXB38V472JV	RESISTOR ARRAY	1	
	R16568	EXB38V472JV	RESISTOR ARRAY	1	
	R16570	EXB38V472JV	RESISTOR ARRAY	1	
	R16573	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R16579	EXB38V470J	RESISTOR ARRAY	1	
	R16582	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16583	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16584	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
	R16585	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
	R16586	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
	R16587	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16588	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16590	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16591	EXB38V472JV	RESISTOR ARRAY	1	
	R16592	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16593	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
	R16602	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16604	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R16605	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
	R16606	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16607	ERJ6ENF7151	M7.15KOHM, 1/10W	1	
	R16608	ERJT08J102V	M 1KOHM,J, 0.33W	1	
	R16609	D0GZ102JA020	M 1KOHM,J,1/16W	1	
	R16610	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R16611	ERJ8GEYJ683V	M 68KOHM, J,1/8W	1	
	R16612	ERJT06J470V	M 47 OHM,F,0.25W	1	
	R16613	ERJ8GEYJ473	M 47KOHM, J,1/8W	1	
	R16614	ERJ8GEYJ683V	M 68KOHM, J,1/8W	1	
	R16615	ERJ6ENF1101	M 1.1KOHM, 1/10W	1	
	R16617	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16621	ERJ6GEYF561	M 560 OHM,F,1/10W	1	
	R16622	ERJ6GEYF561	M 560 OHM,F,1/10W	1	
	R16623	ERJ6GEYF561	M 560 OHM,F,1/10W	1	
	R16631	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16633	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16634	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16638	D0GZ6R8JA020	M 6.8 OHM,J, 0.5W	1	
	R16642	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16643	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16644	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16661	ERJ6GEYG182	M 1.8KOHM,J,1/10W	1	
	R16662	ERJ6ENF2201	M 2.2KOHM, 1/10W	1	
	R16663	ERJ6GEYJ562V	M 5.6KOHM,J,1/10W	1	
	R16664	D0GZ102JA020	M 1KOHM,J,1/16W	1	
	R16665	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16666	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16668	ERJ6GEYF473	M 47KOHM,J,1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16669	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16670	ERJT06J470V	M 47 OHM,F,0.25W	1	
	R16671	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16672	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16674	D0GZ102JA020	M 1KOHM,J,1/16W	1	
	R16676	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16677	ERJ6RBD152	M 1.5KOHM,J,1/10W	1	
	R16678	ERJ8GEYJ563V	M 56KOHM, J,1/8W	1	PAVCA
	R16681	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16682	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16683	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16684	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16685	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16696	ERF5TK2R2	W 2.2 OHM, K, 5W	1	
	R16700	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16701	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16702	ERJ6GEYJ332V	M 3.3K OHM J 1/10W	1	
	R16703	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16704	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16707	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
	R16711	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16712	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16717	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16719	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16720	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16721	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16722	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16723	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16729	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16730	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16731	ERG1FJS823D	M 82KOHM, J, 1W	1	
	R16732	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
	R16733	ERJ6GEYJ474	M 470KOHM,J,1/10W	1	
	R16734	ERJ6ENF4991	M4.99KOHM, 1/10W	1	
	R16735	ERJ6ENF2213	M 221KOHM, 1/10W	1	
	R16736	ERJ6ENF2213	M 221KOHM, 1/10W	1	
	R16737	ERJ6ENF2103	M 210KOHM, 1/10W	1	
	R16738	ERG1FJS823D	M 82KOHM, J, 1W	1	
	R16740	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R16742	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16744	ERJ6ENF2003	M 200KOHM, 1/10W	1	
	R16745	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
	R16746	ERJT06J103V	M 10KOHM,F,0.25W	1	
	R16747	ERJT06J103V	M 10KOHM,F,0.25W	1	
	R16749	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16750	ERJT06J223V	M 22 KOHM,F,0.25W	1	
	R16751	ERJT06J224V	M 220KOHM,F,0.25W	1	
	R16752	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16753	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16756	ERJT06J223V	M 22 KOHM,F,0.25W	1	
	R16757	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16758	ERJ6ENF3241	M3.24KOHM, 1/10W	1	
	R16761	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16762	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16765	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16766	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16769	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16774	ERG1SJ683	M 68KOHM, J, 1W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16775	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16776	DOGD101JA036	M 100 OHM,J,0.25W	1	
	R16777	ERJT06J151V	M 150 OHM,F,0.25W	1	
	R16778	ERF5TK2R2	W 2.2 OHM, K, 5W	1	
	R16781	ERJT06J470V	M 47 OHM,F,0.25W	1	
	R16782	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16785	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16786	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16787	ERJ6ENF3302	M 33KOHM, 1/10W	1	
	R16788	ERJT06J154V	M 150KOHM,F,0.25W	1	
	R16789	DOGD103JA036	M 10KOHM,J,0.25W	1	
	R16791	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16794	ERJ6ENF2003	M 200KOHM, 1/10W	1	
	R16795	ERJ6ENF2003	M 200KOHM, 1/10W	1	
	R16796	ERJ6ENF5602	M 56KOHM, 1/10W	1	
	R16802	ERJ6ENF3321	M3.32KOHM, 1/10W	1	
	R16804	ERJ8GEYJ563V	M 56KOHM, J,1/8W	1	PAVCA
	R16813	ERJ8GEYJ102V	M 1KOHM, J,1/8W	1	
	R16814	ERJ6ENF3091	M3.09KOHM, 1/10W	1	
	R16815	ERJ6ENF1001	M 1KOHM, 1/10W	1	
	R16816	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R16822	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16823	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16824	ERJ6ENF3302	M 33KOHM, 1/10W	1	
	R16825	ERJT06J154V	M 150KOHM,F,0.25W	1	
	R16826	DOGD103JA036	M 10KOHM,J,0.25W	1	
	R16828	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16838	ERJ14YJ563U	M 56KOHM, 1/2W	1	
	R16841	ERJ14YJ563U	M 56KOHM, 1/2W	1	
	R16844	ERJ6ENF1241	M1.24KOHM, 1/10W	1	
	R16845	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16846	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16851	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R16852	DOGD103JA036	M 10KOHM,J,0.25W	1	
	R16860	D0D28R2JA021	M 8.2 OHM,J,2W	1	
	R16867	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16869	ERJ8GEYJ473	M 47KOHM, J,1/8W	1	
	R16870	ERG2FJS333D	M 33KOHM, J, 2W	1	
	R16871	ERJ6GEYG392	M 3.9KOHM,J,1/10W	1	
	R16872	ERJ6GEYJ332V	M 3.3K OHM J 1/10W	1	
	R16873	ERJ6ENF2491	M2.49KOHM, 1/10W	1	
	R16874	ERJ6ENF7322	M73.2KOHM, 1/10W	1	
	R16875	ERJ6ENF7152	M71.5KOHM, 1/10W	1	
	R16886	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R16887	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R16888	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R17101	DOGF103JA047	M 10 KOHM,J, 0.33W	1	
	R17102	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17103	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17104	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17105	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17106	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17107	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17108	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17109	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17110	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17111	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17112	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17113	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17114	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17115	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17116	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17117	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17118	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17119	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17120	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17121	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17122	EXB38V471J	RESISTOR ARRAY	1	
	R17123	EXB38V471J	RESISTOR ARRAY	1	
	R17124	EXB38V471J	RESISTOR ARRAY	1	
	R17125	EXB38V470J	RESISTOR ARRAY	1	
	R17126	EXB38V470J	RESISTOR ARRAY	1	
	R17127	EXB38V471J	RESISTOR ARRAY	1	
	R17128	EXB38V471J	RESISTOR ARRAY	1	
	R17129	EXB38V470J	RESISTOR ARRAY	1	
	R17130	EXB38V470J	RESISTOR ARRAY	1	
	R17131	EXB38V471J	RESISTOR ARRAY	1	
	R17132	EXB38V471J	RESISTOR ARRAY	1	
	R17133	EXB38V470J	RESISTOR ARRAY	1	
	R17134	EXB38V470J	RESISTOR ARRAY	1	
	R17135	EXB38V471J	RESISTOR ARRAY	1	
	R17136	EXB38V470J	RESISTOR ARRAY	1	
	R17137	EXB38V470J	RESISTOR ARRAY	1	
	R17138	EXB38V470J	RESISTOR ARRAY	1	
	R17139	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R17140	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R17141	EXB38V681J	RESISTOR ARRAY	1	
	R17142	EXB38V681J	RESISTOR ARRAY	1	
	R17143	EXB38V220JV	RESISTOR ARRAY	1	
	R17144	EXB38V220JV	RESISTOR ARRAY	1	
	R17145	EXB38V220JV	RESISTOR ARRAY	1	
	R17156	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R17201	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17202	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17203	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17204	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17205	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17206	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17207	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17208	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17209	EXB38V220JV	RESISTOR ARRAY	1	
	R17210	EXB38V220JV	RESISTOR ARRAY	1	
	R17211	EXB38V471J	RESISTOR ARRAY	1	
	R17212	EXB38V471J	RESISTOR ARRAY	1	
	R17213	EXB38V470J	RESISTOR ARRAY	1	
	R17214	EXB38V470J	RESISTOR ARRAY	1	
	R17215	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17216	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17217	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17218	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17219	EXB38V470J	RESISTOR ARRAY	1	
	R17220	EXB38V470J	RESISTOR ARRAY	1	
	R17221	EXB38V471J	RESISTOR ARRAY	1	
	R17222	EXB38V471J	RESISTOR ARRAY	1	
	R17223	EXB38V470J	RESISTOR ARRAY	1	
	R17224	EXB38V470J	RESISTOR ARRAY	1	
	R17225	EXB38V471J	RESISTOR ARRAY	1	
	R17226	EXB38V471J	RESISTOR ARRAY	1	
	R17227	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17228	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17229	EXB38V470J	RESISTOR ARRAY	1	
	R17230	EXB38V470J	RESISTOR ARRAY	1	
	R17231	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17232	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17233	EXB38V220JV	RESISTOR ARRAY	1	
	R17234	EXB38V470J	RESISTOR ARRAY	1	
	R17235	EXB38V470J	RESISTOR ARRAY	1	
	R17236	DOGDR00Z0002	M 0 OHM, 1/10W	1	
	R17237	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17238	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17239	EXB38V470J	RESISTOR ARRAY	1	
	R17240	EXB38V470J	RESISTOR ARRAY	1	
	R17241	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17242	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17243	EXB38V471J	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17244	EXB38V681J	RESISTOR ARRAY	1	
	R17245	EXB38V471J	RESISTOR ARRAY	1	
	R17246	EXB38V220JV	RESISTOR ARRAY	1	
	R17247	EXB38V220JV	RESISTOR ARRAY	1	
	R17248	EXB38V220JV	RESISTOR ARRAY	1	
	R17249	EXB38V220JV	RESISTOR ARRAY	1	
	R17250	EXB38V220JV	RESISTOR ARRAY	1	
	R17251	EXB38V220JV	RESISTOR ARRAY	1	
	R17252	EXB38V471J	RESISTOR ARRAY	1	
	R17253	EXB38V471J	RESISTOR ARRAY	1	
	R17254	EXB38V471J	RESISTOR ARRAY	1	
	R17255	EXB38V471J	RESISTOR ARRAY	1	
	R17256	EXB38V471J	RESISTOR ARRAY	1	
	R17257	EXB38V471J	RESISTOR ARRAY	1	
	R17258	EXB38V471J	RESISTOR ARRAY	1	
	R17259	EXB38V471J	RESISTOR ARRAY	1	
	R17260	EXB38V471J	RESISTOR ARRAY	1	
	R17261	EXB38V471J	RESISTOR ARRAY	1	
	R17262	EXB38V681J	RESISTOR ARRAY	1	
	R17263	EXB38V681J	RESISTOR ARRAY	1	
	R17264	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R17275	EXB38V220JV	RESISTOR ARRAY	1	
	R17276	EXB38V220JV	RESISTOR ARRAY	1	
	R17277	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
	R17301	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R17302	EXB38V470J	RESISTOR ARRAY	1	
	R17315	EXB38V681J	RESISTOR ARRAY	1	
	R17316	EXB38V681J	RESISTOR ARRAY	1	
	R17321	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17322	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17323	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17324	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17325	D0GF103JA047	M 10 KOHM, J, 0.33W	1	
	R17326	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17327	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17328	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17329	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17330	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17331	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17332	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17333	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17334	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17335	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17336	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17337	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17338	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17339	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17340	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17341	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17342	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R17343	ERJ6GEYJ104V	M 100KOHM, J, 1/10W	1	
	R17344	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
	R17345	EXB38V220JV	RESISTOR ARRAY	1	
	R17346	EXB38V220JV	RESISTOR ARRAY	1	
	R17347	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
	R17348	EXB38V331J	RESISTOR ARRAY	1	
	R17349	EXB38V331J	RESISTOR ARRAY	1	
	R17350	EXB38V331J	RESISTOR ARRAY	1	
	R17351	EXB38V331J	RESISTOR ARRAY	1	
	R17352	EXB38V331J	RESISTOR ARRAY	1	
	R17353	EXB38V331J	RESISTOR ARRAY	1	
	R17354	EXB38V471J	RESISTOR ARRAY	1	
	R17355	EXB38V471J	RESISTOR ARRAY	1	
	R17356	EXB38V471J	RESISTOR ARRAY	1	
	R17368	EXB38V471J	RESISTOR ARRAY	1	
	R17370	EXB38V220JV	RESISTOR ARRAY	1	
	R17401	EXB38V681J	RESISTOR ARRAY	1	
	R17402	EXB38V220JV	RESISTOR ARRAY	1	
	R17403	EXB38V220JV	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17420	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
	R17429	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R17430	EXB38V220JV	RESISTOR ARRAY	1	
	R17431	EXB38V331J	RESISTOR ARRAY	1	
	R17432	EXB38V331J	RESISTOR ARRAY	1	
	R17433	EXB38V331J	RESISTOR ARRAY	1	
	R17434	EXB38V331J	RESISTOR ARRAY	1	
	R17435	EXB38V471J	RESISTOR ARRAY	1	
	R17436	EXB38V471J	RESISTOR ARRAY	1	
	R17437	EXB38V331J	RESISTOR ARRAY	1	
	R17438	EXB38V331J	RESISTOR ARRAY	1	
	R17439	EXB38V471J	RESISTOR ARRAY	1	
	R17440	EXB38V471J	RESISTOR ARRAY	1	
	R17441	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R17442	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17443	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17444	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17445	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17446	EXB38V470J	RESISTOR ARRAY	1	
	R17447	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17448	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17449	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17450	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17451	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17452	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17453	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17454	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17455	D0GF103JA047	M 10 KOHM, J, 0.33W	1	
	R17456	EXB38V681J	RESISTOR ARRAY	1	
	R17457	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17458	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17459	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17460	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17461	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17462	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17463	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17464	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17465	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
	R17466	ERJ6GEYJ104V	M 100KOHM, J, 1/10W	1	
	R17501	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
	R17502	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R17503	EXB38V220JV	RESISTOR ARRAY	1	
	R17504	EXB38V220JV	RESISTOR ARRAY	1	
	R17505	EXB38V471J	RESISTOR ARRAY	1	
	R17506	EXB38V471J	RESISTOR ARRAY	1	
	R17507	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17508	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17509	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17510	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17511	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17512	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17513	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17514	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17515	EXB38V470J	RESISTOR ARRAY	1	
	R17516	EXB38V470J	RESISTOR ARRAY	1	
	R17517	EXB38V681J	RESISTOR ARRAY	1	
	R17518	EXB38V470J	RESISTOR ARRAY	1	
	R17519	EXB38V681J	RESISTOR ARRAY	1	
	R17520	EXB38V470J	RESISTOR ARRAY	1	
	R17521	EXB38V471J	RESISTOR ARRAY	1	
	R17522	EXB38V470J	RESISTOR ARRAY	1	
	R17523	EXB38V470J	RESISTOR ARRAY	1	
	R17524	EXB38V470J	RESISTOR ARRAY	1	
	R17525	EXB38V470J	RESISTOR ARRAY	1	
	R17526	EXB38V470J	RESISTOR ARRAY	1	
	R17527	EXB38V470J	RESISTOR ARRAY	1	
	R17528	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17529	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17530	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17531	ERJT14J6R8U	C6.8 OHM, J, 1/4W	1	
	R17532	EXB38V681J	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17533	EXB38V681J	RESISTOR ARRAY	1	
	R17534	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17535	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17536	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17537	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17538	EXB38V470J	RESISTOR ARRAY	1	
	R17539	EXB38V471J	RESISTOR ARRAY	1	
	R17540	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17541	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17542	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17543	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17544	EXB38V471J	RESISTOR ARRAY	1	
	R17545	EXB38V470J	RESISTOR ARRAY	1	
	R17546	EXB38V470J	RESISTOR ARRAY	1	
	R17547	EXB38V471J	RESISTOR ARRAY	1	
	R17548	EXB38V471J	RESISTOR ARRAY	1	
	R17549	EXB38V470J	RESISTOR ARRAY	1	
	R17550	EXB38V681J	RESISTOR ARRAY	1	
	R17551	EXB38V220JV	RESISTOR ARRAY	1	
	R17552	EXB38V220JV	RESISTOR ARRAY	1	
	R17553	EXB38V220JV	RESISTOR ARRAY	1	
	R17554	EXB38V220JV	RESISTOR ARRAY	1	
	R17555	EXB38V220JV	RESISTOR ARRAY	1	
	R17556	EXB38V220JV	RESISTOR ARRAY	1	
	R17557	EXB38V471J	RESISTOR ARRAY	1	
	R17558	EXB38V471J	RESISTOR ARRAY	1	
	R17559	EXB38V471J	RESISTOR ARRAY	1	
	R17560	EXB38V471J	RESISTOR ARRAY	1	
	R17561	EXB38V471J	RESISTOR ARRAY	1	
	R17562	EXB38V471J	RESISTOR ARRAY	1	
	R17563	EXB38V471J	RESISTOR ARRAY	1	
	R17564	EXB38V471J	RESISTOR ARRAY	1	
	R17565	EXB38V471J	RESISTOR ARRAY	1	
	R17566	EXB38V471J	RESISTOR ARRAY	1	
	R17567	EXB38V471J	RESISTOR ARRAY	1	
	R17568	EXB38V220JV	RESISTOR ARRAY	1	
	R17569	EXB38V220JV	RESISTOR ARRAY	1	
	R17580	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R17581	EXB38V220JV	RESISTOR ARRAY	1	
	R17601	EXB38V681J	RESISTOR ARRAY	1	
	R17602	EXB38V220JV	RESISTOR ARRAY	1	
	R17603	EXB38V220JV	RESISTOR ARRAY	1	
	R17604	EXB38V220JV	RESISTOR ARRAY	1	
	R17605	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R17606	EXB38V471J	RESISTOR ARRAY	1	
	R17607	EXB38V471J	RESISTOR ARRAY	1	
	R17608	EXB38V471J	RESISTOR ARRAY	1	
	R17609	EXB38V471J	RESISTOR ARRAY	1	
	R17610	EXB38V471J	RESISTOR ARRAY	1	
	R17611	EXB38V471J	RESISTOR ARRAY	1	
	R17612	EXB38V471J	RESISTOR ARRAY	1	
	R17613	EXB38V471J	RESISTOR ARRAY	1	
	R17614	EXB38V470J	RESISTOR ARRAY	1	
	R17615	EXB38V470J	RESISTOR ARRAY	1	
	R17616	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17617	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17618	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17619	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17620	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17621	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17622	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17623	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17624	DOGF103JA047	M 10 KOHM,J,0.33W	1	
	R17625	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17626	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17627	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17628	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17629	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17630	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17631	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17632	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17633	EXB38V470J	RESISTOR ARRAY	1	
	R17634	EXB38V681J	RESISTOR ARRAY	1	
	R17635	EXB38V470J	RESISTOR ARRAY	1	
	R17636	EXB38V470J	RESISTOR ARRAY	1	
	R17637	EXB38V470J	RESISTOR ARRAY	1	
	R17638	EXB38V470J	RESISTOR ARRAY	1	
	R17639	EXB38V470J	RESISTOR ARRAY	1	
	R17640	EXB38V470J	RESISTOR ARRAY	1	
	R17641	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17642	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17643	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17644	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17645	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R17646	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	SC2	K1KA02A00676	2P CONNECTOR	1	
	SC20	K1MN35BA0266	35P CONNECTOR	1	
	SC41	K1KA23AA0733	23P CONNECTOR	1	
	SC42	K1KA23AA0733	23P CONNECTOR	1	
	SC46	K1KA09A00239	9P CONNECTOR	1	
	SD11	K1MN20BA0231	20P CONNECTOR	1	
	SD42	K1KB23AA0234	23P CONNECTOR	1	
	SD46	K1KY09AA0607	9P CONNECTOR	1	
	SD1B	K1MNA8BA0250	8P CONNECTOR	1	
	SD4B	K1MNA8BA0250	8P CONNECTOR	1	
	SD5B	K1MNA8BA0250	8P CONNECTOR	1	
	SD2B	K1MNA8BA0250	8P CONNECTOR	1	
	SD3B	K1MNA8BA0250	8P CONNECTOR	1	
	SS02	K1KB15AA0032	15P CONNECTOR	1	
	SS03	K1KB15AA0032	15P CONNECTOR	1	
	SS11	K1KA02A00676	2P CONNECTOR	1	
	SS12	K1KA10AA0194	10P CONNECTOR	1	
	SS21	K1KY15AA0606	15P CONNECTOR	1	
	SS22	K1KY15AA0606	15P CONNECTOR	1	
	SS32	K1KA04AA0193	4P CONNECTOR	1	
	SS33	K1KA10A00416	10P CONNECTOR	1	
	SS34	K1KA03AA0193	3P CONNECTOR	1	
	SS35	K1KA04AA0193	4P CONNECTOR	1	
	SS51	K1MN13B00091	13P CONNECTOR	1	
	SS52	K1MN13B00091	13P CONNECTOR	1	
	SS53	K1MN13B00091	13P CONNECTOR	1	
	SS54	K1MN13B00091	13P CONNECTOR	1	
	SS55	K1MN13B00091	13P CONNECTOR	1	
	SS56	K1MN13B00091	13P CONNECTOR	1	
	SS57	K1MN13B00091	13P CONNECTOR	1	
	SS58	K1MN13B00091	13P CONNECTOR	1	
	SSMM2	TMME190	CLAMPER	1	
	SSMM4	TMME260	CLAMPER	1	
	SSMM6	TMME260	CLAMPER	1	
	SSMM7	TMME260	CLAMPER	1	
	SU11	K1MN20BA0266	20P CONNECTOR	1	
	SU41	K1KB23AA0234	23P CONNECTOR	1	
	SU1B	K1MNA8BA0250	8P CONNECTOR	1	
	SU2B	K1MNA8BA0250	8P CONNECTOR	1	
	SU5B	K1MNA8BA0250	8P CONNECTOR	1	
	SU4B	K1MNA8BA0250	8P CONNECTOR	1	
	SU3B	K1MNA8BA0250	8P CONNECTOR	1	
	T16301	ETS19AB249AC	SWITCHING TRANS	1	
	T16697	ETS19AB249AC	SWITCHING TRANS	1	
	VR16000	EVMEASA00B54	CONTROL 50KOHMB 0.3W	1	
	VR16600	EVMEASA00B54	CONTROL 50KOHMB 0.3W	1	
	VR16602	EVMEASA00B23	CONTROL 2KOHMB 0.3W	1	
	ZA14901	K4AD01Z00004	TERMINAL	1	PAVCA

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ZA14902	K4AD01Z00004	TERMINAL	1	PAVCA
	ZA14903	K4AD01Z00004	TERMINAL	1	PAVCA
	ZA14951	K4AD01Z00004	TERMINAL	1	PAVCA
	ZA14952	K4AD01Z00004	TERMINAL	1	PAVCA
	ZA14953	K4AD01Z00004	TERMINAL	1	PAVCA
	ZA16001	K4CD01000011	AV TERMINAL	1	
	ZA16002	K4CD01000011	AV TERMINAL	1	
	ZA16003	K4CD01000011	AV TERMINAL	1	
	ZA16010	K4ZZ01000206	TERMINAL	1	
	ZA16011	K4ZZ01000206	TERMINAL	1	
	ZA16012	K4ZZ01000206	TERMINAL	1	
	ZA16013	K4ZZ01000206	TERMINAL	1	
	ZA16401	K4CD01000011	AV TERMINAL	1	
	ZA16402	K4CD01000011	AV TERMINAL	1	
	ZA16403	K4CD01000011	AV TERMINAL	1	
	ZA17101	K4CD01000013	AV TERMINAL	1	
	ZA17103	K4CD01000013	AV TERMINAL	1	
	ZA17104	K4CD01000013	AV TERMINAL	1	
	ZA17105	K4CD01000013	AV TERMINAL	1	
	ZA17106	K4CD01000013	AV TERMINAL	1	
	ZA17201	K4CD01000013	AV TERMINAL	1	
	ZA17202	K4CD01000013	AV TERMINAL	1	
	ZA17203	K4CD01000013	AV TERMINAL	1	
	ZA17204	K4CD01000013	AV TERMINAL	1	
	ZA17205	K4CD01000013	AV TERMINAL	1	
	ZA17301	K4CD01000013	AV TERMINAL	1	
	ZA17303	K4CD01000013	AV TERMINAL	1	
	ZA17304	K4CD01000013	AV TERMINAL	1	
	ZA17305	K4CD01000013	AV TERMINAL	1	
	ZA17306	K4CD01000013	AV TERMINAL	1	
	ZA17401	K4CD01000013	AV TERMINAL	1	
	ZA17403	K4CD01000013	AV TERMINAL	1	
	ZA17404	K4CD01000013	AV TERMINAL	1	
	ZA17405	K4CD01000013	AV TERMINAL	1	
	ZA17406	K4CD01000013	AV TERMINAL	1	
	ZA17502	K4CD01000013	AV TERMINAL	1	
	ZA17503	K4CD01000013	AV TERMINAL	1	
	ZA17504	K4CD01000013	AV TERMINAL	1	
	ZA17505	K4CD01000013	AV TERMINAL	1	
	ZA17506	K4CD01000013	AV TERMINAL	1	
	ZA17601	K4CD01000013	AV TERMINAL	1	
	ZA17602	K4CD01000013	AV TERMINAL	1	
	ZA17603	K4CD01000013	AV TERMINAL	1	
	ZA17604	K4CD01000013	AV TERMINAL	1	
	ZA17605	K4CD01000013	AV TERMINAL	1	
△	A601	AYRA362MSV7T	ARRESTOR	1	
△	A602	AYRA362MSV7T	ARRESTOR	1	
	C201	ACKZE1H220T	50V 22PF	1	
	C202	ACCC3FD470JP	3kV 47PF	1	
	C203	ACCC3FD470JP	3kV 47PF	1	
	C204	ACMPEF12333H	1250V 0.033PF	1	
	C205	ACMPEF12333H	1250V 0.033PF	1	
	C207	ACDE1SL471JP	1kV 470PF	1	
	C208	ACDE1SL471JP	1kV 470PF	1	
	C209	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C210	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C231	ACKZE1H220T	50V 22PF	1	
	C232	ACKZE1H220T	50V 22PF	1	
	C251	ECQV1H104JL	P 0.1UF, J, 50V	1	
	C252	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C254	ECQE2223SKF	250V 0.022PF	1	
	C255	ECQE2223SKF	250V 0.022PF	1	
△	C256	ACKMQ220901Z	220V 900PF	1	
△	C257	ACKMQ220901Z	220V 900PF	1	
△	C258	ACKMQ220901Z	220V 900PF	1	
△	C259	ACKMQ220901Z	220V 900PF	1	
	C301	ACKZE1H220T	50V 22PF	1	
	C302	ACRR3DD101K7	2kV 100PF	1	
	C303	ACRR3DD101K7	2kV 100PF	1	
	C304	ACMPEF12473H	1250V 0.047PF	1	
	C305	ACCK1B681KP	1kV 680p	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C306	ACCK1B681KP	1kV 680p	1	
	C352	ACKZE1E182ST	25V 1800PF	1	
	C354	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C355	ECQV1H823JL	50V 0.082PF	1	
	C357	ACKZE1E471LT	25V 470PF	1	
	C358	ACKZE1E471LT	25V 470PF	1	
	C401	ECQE2104SKF	250V 0.1PF	1	
	C402	ECQE2104SKF	250V 0.1PF	1	
△	C403	EETHC2C471HX	160V 470PF	1	
	C404	ACKZE1H101T	50V 100PF	1	
△	C406	EETHC2A122JJ	100V 1200PF	1	
	C409	ECQE2104SKF	250V 0.1PF	1	
	C451	ACKZE1A471C	10V 470PF	1	
	C500	ACKZE1H221T	50V 220PF	1	
△	C501	ECQU2A103MLA	P 0.01UF, M, 250V	1	
△	C503	ACKMQ2W560T	450V 56PF	1	
	C504	ACKZE1H220T	50V 22PF	1	
	C505	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C506	ACKZE1H100T	50V 10PF	1	
	C507	ACKZE1H221T	50V 220PF	1	
	C508	ACKZE1H220T	50V 22PF	1	
	C551	ACKZE1A102LC	10V 1000PF	1	
	C555	ACKZE1E470T	25V 47PF	1	
	C558	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C559	ECQV1H474JL	P 0.47UF, J, 50V	1	
△	C602	ECQU2A104MLA	P 0.1UF, M, 250V	1	
△	C603	ECKENA221KBR	C 221P 250V	1	
△	C604	ECKENA221KBR	C 221P 250V	1	
	C605	ACDE1R102K7	1kV 680p	1	
△	C606	AC4MPH105KA3	450V 1PF	1	
	C610	ECQV1H105JL	50V 1PF	1	
	C611	ACKZE1H220T	50V 22PF	1	
△	C612	EETHD2W301LZ	450V 300PF	1	
△	C613	EETHD2W301LZ	450V 300PF	1	
△	C615	ECKENA101KBR	C 100P 250V	1	
△	C620	ECKENA101KBR	C 100P 250V	1	
△	C621	ECKENA101KBR	C 100P 250V	1	
	C625	ACRR3AD222KP	1kV 2200PF	1	
△	C629	AC4MPH105KA3	450V 1PF	1	
	C701	ACKZE1A471C	10V 470PF	1	
	C702	ECQV1H103JL2	50V 0.01PF	1	
△	C801	ECQU2A104MLA	P 0.1UF, M, 250V	1	
△	C802	ECKENA101KBR	C 100P 250V	1	
△	C803	ECKENA101KBR	C 100P 250V	1	
	C807	ACDE1R102K7	1kV 680p	1	
△	C808	AC4MPH105KA3	450V 1PF	1	
	C809	ACRR3AD222KP	1kV 2200PF	1	
	C810	ECQV1H105JL	50V 1PF	1	
	C811	ACKZE1H220T	50V 22PF	1	
△	C812	EETHD2W301LZ	450V 300PF	1	
△	C814	ECKENA101KBR	C 100P 250V	1	
△	C815	ECKENA221KBR	C 221P 250V	1	
△	C816	ECKENA221KBR	C 221P 250V	1	
△	C818	AC4MPH105KA3	450V 1PF	1	
	D201	VDAG01AT	DIODE	1	
	D202	VDAG01AT	DIODE	1	
	D251	MA165TAKU	DIODE	1	
	D254	MA2DF3100S	DIODE	1	
	D255	MA2DF3100S	DIODE	1	
	D256	MA2DF3100S	DIODE	1	
	D257	MA2DF3100S	DIODE	1	
	D351	VDG865C08R	DIODE	1	
	D352	VDAG01AT	DIODE	1	
	D353	VDG865C08R	DIODE	1	
	D401	VDD6SBN20	DIODE	1	
	D402	VDAG01AT	DIODE	1	
	D403	VDYG901C3R	DIODE	1	
	D500	VDAG01AT	DIODE	1	
△	D501	VDS1WBA80	DIODE	1	
	D504	VXST3D82BL3	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D505	VDAG01AT	DIODE	1	
	D506	VDAG01AT	DIODE	1	
	D551	VDRK39A5	DIODE	1	
	D603	VDAP01CT	DIODE	1	
	D604	VDAP01CT	DIODE	1	
	D606	VDS3V60L1	DIODE	1	
	D651	MA165TAKU	DIODE	1	
	D652	MA165TAKU	DIODE	1	
	D702	VDERA83-004T	DIODE	1	
	D703	MA165TAKU	DIODE	1	
	D801	MA165TAKU	DIODE	1	
	D802	MA165TAKU	DIODE	1	
	D803	VDAP01CT	DIODE	1	
	D804	VDAP01CT	DIODE	1	
	D805	VDS3V60L1	DIODE	1	
△	F201	HU216005BEP	FUSE	1	
△	F301	HU216005BEP	FUSE	1	
△	F601	HU215010BEP	FUSE	1	
△	F602	HU215010BEP	FUSE	1	
△	F801	HU215010BEP	FUSE	1	
△	F802	HU215010BEP	FUSE	1	
△	F803	HU382T2P	FUSE	1	
	IC251	AN1431TBTA	IC	1	
	IC352	AN1431TBTA	IC	1	
	IC401	AN1431TBTA	IC	1	
△	IC501	MTP3E30MPSCF	IC	1	
	IC555	AN1431TBTA	IC	1	
△	K601	ALKT329C93	RELAY	1	
△	K602	ALDJ5D2T8	RELAY	1	
△	K801	ALKT329C93	RELAY	1	
△	K802	ALDJ5D2T8	RELAY	1	
	L401	AYLH8TB681K	FILTER CHOKE	1	
	L402	AYH221012HY	FILTER CHOKE	1	
	L500	EXCELDLR35V	CORE	1	
	L501	EXCELSA35	BEAD CHOKE	1	
	L502	EXCELDLR35V	CORE	1	
	L503	EXCELDLR35V	CORE	1	
△	L601	AYP3165208ZA	FILTER CHOKE	1	
△	L602	AYP3165208ZA	FILTER CHOKE	1	
	L603	ETB50CZ14GAD	TRANSFORMER	1	
△	L604	AYP3165208ZA	FILTER CHOKE	1	
	L801	EXCELSA35	BEAD CHOKE	1	
△	L802	AYP2590204Z	FILTER CHOKE	1	
△	L803	AYP2590204Z	FILTER CHOKE	1	
	L805	ETB32CZ13GAD	TRANSFORMER	1	
△	MC201	MDPPND471	MODULE	1	
△	MC203	MP00R3A1	MODULE	1	
△	MC204	MP00R3A1	MODULE	1	
△	MC231	MDPHHA101	MODULE	1	
△	MC301	MDPPND472	MODULE	1	
△	MC352	MDPJFB471	MODULE	1	
△	MC401	MDPPSA471	MODULE	1	
△	MC451	MDPLSC471	MODULE	1	
△	MC501	MDPTZA101	MODULE	1	
△	MC502	MDPHHA101	MODULE	1	
△	MC552	MDPPFC101	MODULE	1	
△	MC601	MDPLFB101	MODULE	1	
△	MC602	MP00P18	MODULE	1	
△	MC603	MP00P28	MODULE	1	
△	MC606	MP00P29	MODULE	1	
△	MC701	MDPZDA471	MODULE	1	
△	MC801	MP00P15A1	MODULE	1	
△	MC802	MDPLFB472	MODULE	1	
	P2	AKB2P3-VH-B	2P CONNECTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	P6	AKB12B-EH-A	12P CONNECTOR	1	
	P7	AKB11B-EH-A	11P CONNECTOR	1	
△	P9	AKB03P-VL	3P CONNECTOR	1	
	P11	AKB2P3-VH-B	2P CONNECTOR	1	
	P12	AKB10B-PH-KS	10P CONNECTOR	1	
	P25	AKB13B-PH-KS	13P CONNECTOR	1	
△	P51	AKB3P4VH-B-L	3P CONNECTOR	1	
△	P52	AKB3P4VH-B-L	3P CONNECTOR	1	
△	P53	AKB2P-VH	2P CONNECTOR	1	
△	P54	AKB2P-VH	2P CONNECTOR	1	
	P55	AKB8B-PH-KS	8P CONNECTOR	1	
	P56	AKB8B-PH-KS	8P CONNECTOR	1	
△	PC201	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC202	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC231	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC301	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC302	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC401	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC501	VPS2581AL1VH	OPTOISOLATOR	1	
△	PC502	VPS2581AL1VH	OPTOISOLATOR	1	
	Q201	2SD21770SA	TRANSISTOR	1	
	Q202	2SB14340SA	TRANSISTOR	1	
	Q203	2SD21770SA	TRANSISTOR	1	
	Q204	2SB14340SA	TRANSISTOR	1	
△	Q301	VKFMA16N55G	FET	1	
△	Q302	VKFMA16N55G	FET	1	
	Q351	2SK3704	FET	1	
△	Q401	2SK3607	FET	1	
	Q402	2SA17670Q2	TRANSISTOR	1	
	Q403	2SA17670Q2	TRANSISTOR	1	
	Q651	2SB1030AR	TRANSISTOR	1	
	Q652	2SB1030AR	TRANSISTOR	1	
	R201	ERG12SJ820J	M 82 OHM, J,1/2W	1	
	R202	ERQ14AJ4R7J	F 4.7 OHM, J,1/4W	1	
	R203	ERDS2FJ334	C 330KOHM, J,1/4W	1	
	R204	ERDS2FJ334	C 330KOHM, J,1/4W	1	
	R205	ERDS2FJ334	C 330KOHM, J,1/4W	1	
	R206	ERDS2FJ334	C 330KOHM, J,1/4W	1	
	R207	ERG12SJ820J	M 82 OHM, J,1/2W	1	
	R208	ER0S2CKF1000	M 100 OHM, F,1/4W	1	
	R209	ERDS2FJ154	C 150KOHM, J,1/4W	1	
	R210	ERDS2FJ154	C 150KOHM, J,1/4W	1	
	R211	ERX12SJ3R3J	M 3.3 OHM, J,1/2W	1	
	R212	ERX12SJ3R3J	M 3.3 OHM, J,1/2W	1	
	R215	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R216	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R218	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R219	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R220	ER0S2CHF1300	M 130 OHM, F,1/4W	1	
	R251	ARRCR1F1153T	METAL GLAZE FIXED RESISTOR	1	
	R252	ARRCR1F1133T	METAL GLAZE FIXED RESISTOR	1	
	R253	ERDS2FJ151	C 150 OHM, J,1/4W	1	
	R254	ERDS2FJ102	M 1KOHM, J,1/10W	1	
	R256	ER0S2THD1002	M 10 KOHM, F,1/4W	1	
	R257	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R258	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R259	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R263	ERDS2FJ220	C 22 OHM, J,1/4W	1	
	R264	ERDS2FJ102	M 1KOHM, J,1/10W	1	
	R265	ARRCR1F2103T	METAL GLAZE FIXED RESISTOR	1	
	R266	ARRCR1F3323T	METAL GLAZE FIXED RESISTOR	1	
	R267	ARRCR1F3243T	METAL GLAZE FIXED RESISTOR	1	
	R302	ERQ14AJ4R7J	F 4.7 OHM, J,1/4W	1	
	R303	ERDS2FJ334	C 330KOHM, J,1/4W	1	
	R304	ERDS2FJ334	C 330KOHM, J,1/4W	1	
	R308	ERG12SJ910J	M 91 OHM, J,1/2W	1	
	R309	ERG12SJ680J	M 68 OHM, J,1/2W	1	
	R310	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R311	ERG12SJ910J	M 91 OHM, J,1/2W	1	
	R351	ER0S2CHF8871	M8.87KOHM, F,1/4W	1	
	R352	ARRF5EJ30MB	METAL GLAZE FIXED RESISTOR	1	
	R353	ERDS2FJ561	C 560 OHM, J,1/4W	1	
	R354	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R355	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R356	ER0S2THD1002	M 10 KOHM, F,1/4W	1	
	R359	ER0S2THD5232	M52.3KOHM, F,1/4W	1	
	R362	ERG12SJ332J	M 3.3KOHM, J,1/2W	1	
	R366	ER0S2THF6981	M6.98KOHM, F,1/4W	1	
	R367	ER0S2CHF8451	M8.45KOHM, F,1/4W	1	
	R371	ER0S2THF6981	M6.98KOHM, F,1/4W	1	
	R372	ER0S2THF1151	M1150 OHM, F,1/4W	1	
	R403	ERG12SJ100J	M 10 OHM, J,1/2W	1	
	R404	ER0S2CHF5492	M54.9KOHM, F,1/4W	1	
	R405	ARRF2EJR10B	METAL GLAZE FIXED RESISTOR	1	
	R409	ERDS2FJ473	C 47KOHM, J,1/4W	1	
	R411	ER0S2CKF2001	M 2KOHM, F,1/4W	1	
	R412	ER0S2CKF2001	M 2KOHM, F,1/4W	1	
	R413	ER0S2CHF3092	M30.9KOHM, F,1/4W	1	
	R417	ER0S2CHF4222	M42.2KOHM, F,1/4W	1	
	R418	ER0S2CHF4022	M40.2KOHM, F,1/4W	1	
	R420	ER0S2THF5620	M 56.2 OHM, F,1/4W	1	
	R421	ER0S2THF4422	M42.2KOHM, F,1/4W	1	
	R422	ER0S2CHF1272	M12.7KOHM, F,1/4W	1	
	R423	ER0S2CHF1333	M 133KOHM, F,1/4W	1	
	R456	ER0S2CKF1332	M13.3KOHM, F,1/4W	1	
⚠	R502	ARRCR6J825M	METAL GLAZE FIXED RESISTOR	1	
	R505	ERDS2FJ201	C 200 OHM, J,1/4W	1	
	R506	ARRCR2F1304T	METAL GLAZE FIXED RESISTOR	1	
	R507	ARRCR2F1184T	METAL GLAZE FIXED RESISTOR	1	
	R509	ARRCR2F1304T	METAL GLAZE FIXED RESISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R510	ARRCR2F1184T	METAL GLAZE FIXED RESISTOR	1	
	R522	ERDS2FJ180	C 18 OHM, J,1/4W	1	
	R555	ER0S2CKF1052	M10.5KOHM, F,1/4W	1	
	R557	ERDS2TJ392	C 3.9KOHM, J,1/4W	1	
	R560	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R561	ER0S2CKF2152	M21.5KOHM, F,1/4W	1	
	R562	ERDS2FJ150	C 15 OHM, J,1/4W	1	
	R563	ERDS2FJ121	C 120 OHM, J,1/4W	1	
	R564	ER0S2THD1002	M 10 KOHM, F,1/4W	1	
	R603	ARRCR2F4753T	METAL GLAZE FIXED RESISTOR	1	
	R604	ARRCR2F4023T	METAL GLAZE FIXED RESISTOR	1	
	R607	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R608	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R611	ER0S2THF5112	M51.1KOHM, F,1/4W	1	
	R617	ARRF5EJR15B	METAL GLAZE FIXED RESISTOR	1	
	R618	ARRF5EJR15B	METAL GLAZE FIXED RESISTOR	1	
	R619	ARRF5EJR10B	METAL GLAZE FIXED RESISTOR	1	
	R622	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R623	ERG12SJ270J	M 27 OHM, J,1/2W	1	
	R624	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R625	ERG12SJ270J	M 27 OHM, J,1/2W	1	
	R626	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R627	ERG12SJ270J	M 27 OHM, J,1/2W	1	
	R630	ARRCR1F2493T	METAL GLAZE FIXED RESISTOR	1	
	R631	ARRCR1F2493T	METAL GLAZE FIXED RESISTOR	1	
	R632	ARRCR1F2213T	METAL GLAZE FIXED RESISTOR	1	
	R651	ERDS2FJ103	C 10KOHM, J,1/4W	1	
	R652	ERDS2FJ103	C 10KOHM, J,1/4W	1	
	R653	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R654	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R655	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R656	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R657	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R658	ERDS2FJ681	C680 OHM, J,1/4W	1	
	R701	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R702	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R705	ERDS2FJ393	C 39KOHM, J,1/4W	1	
	R706	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R707	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R712	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R713	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
⚠	R801	ARRCR5J624M	METAL GLAZE FIXED RESISTOR	1	
	R802	ARR5B100JC2	5W 10 OHM	1	
	R803	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R804	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R805	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R806	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R807	ER0S2CHF3482	M34.8KOHM, F,1/ 4W	1	
	R809	ARRF5EJR10B	METAL GLAZE FIXED RESISTOR	1	
	R810	ARRF5EJR10B	METAL GLAZE FIXED RESISTOR	1	
	R811	ERDS2FJ472	C 4.7KOHM, J,1/ 4W	1	
	R812	ERG12SJ270J	M 27 OHM, J,1/2W	1	
	R813	ERDS2FJ472	C 4.7KOHM, J,1/ 4W	1	
	R814	ERG12SJ270J	M 27 OHM, J,1/2W	1	
	R815	ARRCR1F2493T	METAL GLAZE FIXED RESISTOR	1	
	R816	ARRCR1F2493T	METAL GLAZE FIXED RESISTOR	1	
	R817	ARRCR1F2213T	METAL GLAZE FIXED RESISTOR	1	
⚠	RF601	HUY5JA200JP	W 20 OHM, J, 5W	1	
⚠	RF801	HUY5JA200JP	W 20 OHM, J, 5W	1	
⚠	T201	ETB58LZ12GAD	TRANSFORMER	1	
⚠	T301	ETB50LZ1DGAD	TRANSFORMER	1	
⚠	T501	ETB25BG128AH	TRANSFORMER	1	
	VR251	EVMEASA01B55	VARIABLE RESIS- TOR	1	
	VR401	EVMEASA01B14	VARIABLE RESIS- TOR	1	
⚠	Z501	ERZVGAD471	VARISTOR	1	
⚠	Z502	ERZVGAD471	VARISTOR	1	
⚠	Z601	ERZVGED751	VARISTOR	1	
⚠	Z602	ERZVGED751	VARISTOR	1	
⚠	Z603	ERZVGAD471	VARISTOR	1	
⚠	Z801	ERZVGED751	VARISTOR	1	
⚠	Z802	ERZVGED751	VARISTOR	1	
	ZD201	MA4270NMTA	ZENER DIODE	1	
	ZD203	MA4270NMTA	ZENER DIODE	1	
	ZD204	MA4270NMTA	ZENER DIODE	1	
	ZD206	MA4270NMTA	ZENER DIODE	1	
	ZD207	MA4270NMTA	ZENER DIODE	1	
	ZD251	MA4330NMTA	ZENER DIODE	1	
	ZD301	MA4270NMTA	ZENER DIODE	1	
	ZD302	MA4270NMTA	ZENER DIODE	1	
	ZD305	MA4270NMTA	ZENER DIODE	1	
	ZD351	MA4330NMTA	ZENER DIODE	1	
	ZD401	MA4360NM	ZENER DIODE	1	
	ZD451	MAZ4068NMF	ZENER DIODE	1	
	ZD501	MA4300NMTA	ZENER DIODE	1	
	ZD502	MA4300NMTA	ZENER DIODE	1	
	ZD503	MA4082NM	ZENER DIODE	1	
	ZD555	MA4330NMTA	ZENER DIODE	1	
	ZD601	MA4047NM	ZENER DIODE	1	
	ZD801	MA4047NM	ZENER DIODE	1	